


Last information update: November 2024

**Product configuration: Q584**

Q584: Frame 3 LED section - Wall Washer

**Product code**

Q584: Frame 3 LED section - Wall Washer

**Technical description**

Miniaturized recessed linear luminaire for LED lamps. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient and homogeneous effect on walls from top to bottom and avoids shadow zones near the ceiling. Main body with die-cast zamak radiant surface, version with perimeter surface frame. Flux enhancer - superpure aluminium reflector - asymmetrical textured PMMA screen - black polycarbonate internal perimeter frame. Ballast not included, available with separate code.

**Installation**

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 60.

**Colour**

Black / Black (43) | Black / White (47) | Grey / Black (74)\*

**Weight (Kg)**

0.15

\* Colours on request

**Mounting**

ceiling recessed

**Wiring**

Direct current ballasts to be ordered separately: ON-OFF - code no. MXF9 (min 1 / max 2); dimmable DALI - code no. BZM4 (min 1 / max 6) - check the instruction sheet for the lengths and compatible cross-sections of the cables to be used.

Complies with EN60598-1 and pertinent regulations




IP20

IP43

On the visible part of  
the product once installed**Technical data**

lm system:	221	Colour temperature [K]:	4000
W system:	5.9	MacAdam Step:	2
lm source:	670	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	5.9	Lamp code:	LED
Luminous efficiency (lm/W, real value):	37.5	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	33	LED current [mA]:	700
CRI (minimum):	90		

Polar

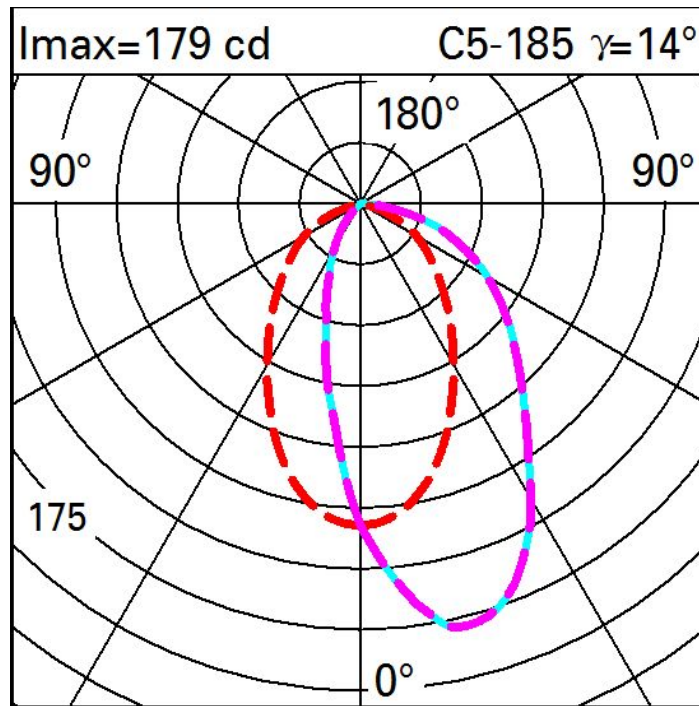

Illuminances

