


Last information update: June 2023

**Product configuration: MQ13**

MQ13: Ceiling-mounted luminaire - warm LED - General light - Electronic control gear

**Product code**MQ13: Ceiling-mounted luminaire - warm LED - General light - Electronic control gear **Attention! Code no longer in production****Technical description**

LED lamp, ceiling-mounted luminaire; integrated electronic control gear. Die-cast aluminium plate for surface mounting with diffuser element; technical, shaped aluminium sheet brackets for components and optics; multi-faceted reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer; safety glass cover over LED lamp; lathe-shaped aluminium cylindrical body; lower ring in high resistance polycarbonate. General lighting optic.

**Installation**

Plate fixed to ceiling using screws and screw anchors (not included); bayonet assembly systems ensuring simple installation and maintenance; snap-on spring fastening for reflector. Wall or pendant application option available thanks to special accessory kits with a separate code.

**Colour**

White (01) | Grey (15)

**Weight (Kg)**

3

**Mounting**

wall surface|ceiling surface|ceiling pendant

**Wiring**

Control gear integrated in luminaire; mains and optic unit connections made with quick coupling terminal blocks.

**Notes**

Kit for wall-mounting: code no. 9443 - kit for steel cable pendant system L 1500: code no. 9440

Complies with EN60598-1 and pertinent regulations



IP23

**Technical data**

Im system:	3399	Colour temperature [K]:	3000
W system:	29	MacAdam Step:	2
Im source:	4000	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	25	Ballast losses [W]:	4
Luminous efficiency (Im/W, real value):	117.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	85	Number of optical assemblies:	1
CRI:	80		


**Polar**

Imax=1685 cd		CIE		Lux	
h	d	Em	E <sub>max</sub>		
1	2.3	1058	1508		
2	4.6	264	377		
3	6.9	118	168		
4	9.2	66	94		

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	65	58	53	50	57	53	52	48	56
1.0	70	64	60	56	63	59	58	54	64
1.5	78	73	69	66	72	68	68	64	75
2.0	82	78	75	73	77	74	73	70	82
2.5	84	81	79	77	80	77	76	73	86
3.0	85	83	81	79	81	80	79	75	89
4.0	87	85	83	82	83	82	81	78	91
5.0	88	86	85	84	85	83	82	79	93

# Luminance curve limit

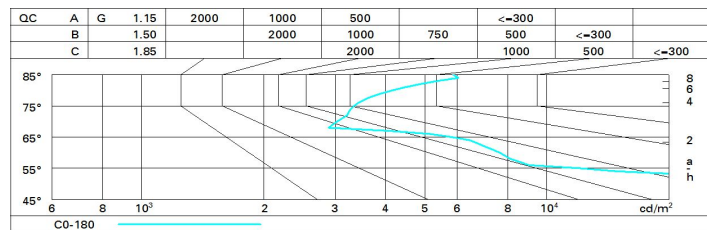

# UGR diagram

Corrected UGR values (at 4000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	23.4	24.2	23.7	24.4	24.7	23.4	24.2	23.7	24.4	24.7
	3H	23.3	24.0	23.6	24.3	24.6	23.3	24.0	23.6	24.3	24.6
	4H	23.2	23.9	23.6	24.2	24.5	23.3	23.9	23.6	24.2	24.5
	6H	23.2	23.8	23.6	24.1	24.4	23.2	23.8	23.5	24.1	24.4
	8H	23.2	23.8	23.6	24.1	24.4	23.1	23.7	23.5	24.0	24.4
	12H	23.2	23.7	23.6	24.1	24.4	23.1	23.6	23.5	24.0	24.3
4H	2H	23.3	23.9	23.6	24.2	24.5	23.2	23.9	23.6	24.2	24.5
	3H	23.2	23.7	23.5	24.0	24.4	23.2	23.7	23.6	24.1	24.4
	4H	23.1	23.6	23.5	24.0	24.3	23.1	23.6	23.5	24.0	24.3
	6H	23.1	23.5	23.5	23.9	24.3	23.0	23.5	23.5	23.9	24.3
	8H	23.1	23.5	23.5	23.9	24.3	23.0	23.4	23.5	23.8	24.2
	12H	23.1	23.4	23.5	23.9	24.3	23.0	23.3	23.4	23.7	24.2
8H	4H	23.0	23.4	23.5	23.8	24.2	23.1	23.5	23.5	23.9	24.3
	6H	23.0	23.3	23.5	23.8	24.2	23.0	23.4	23.5	23.8	24.3
	8H	23.0	23.3	23.5	23.8	24.3	23.0	23.3	23.5	23.8	24.3
	12H	23.1	23.3	23.6	23.8	24.3	23.0	23.2	23.5	23.7	24.2
12H	4H	23.0	23.3	23.4	23.7	24.2	23.1	23.4	23.5	23.9	24.3
	6H	23.0	23.2	23.5	23.7	24.2	23.1	23.3	23.6	23.8	24.3
	8H	23.0	23.2	23.5	23.7	24.2	23.1	23.3	23.6	23.8	24.3
Variations with the observer position at spacing:											
S =		1.0H	1.7 / -5.1				1.7 / -5.1				
		1.5H	2.6 / -6.3				2.6 / -6.3				
		2.0H	4.5 / -7.6				4.5 / -7.6				