


Last information update: May 2024

Product configuration: MB66

MB66: Round recessed luminaire - D=226 mm H=103 mm - neutral white - electronic ballast - optic with asymmetrical double emission

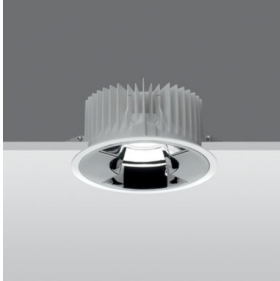

Product code

MB66: Round recessed luminaire - D=226 mm H=103 mm - neutral white - electronic ballast - optic with asymmetrical double emission **Attention! Code no longer in production**

Technical description

Recessed fixed round luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 2000 lm LED unit in a neutral white tone 4000K and electronic driver separate from the luminaire. Double asymmetrical light distribution.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Mounting

ceiling recessed

Wiring


Product complete with electronic components

Complies with EN60598-1 and pertinent regulations



IP20


IP23



Technical data

lm system:	1879	CRI:	80
W system:	18.8	Colour temperature [K]:	4000
lm source:	2000	MacAdam Step:	3
W source:	16	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	100	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	94	Number of optical assemblies:	1

Polar

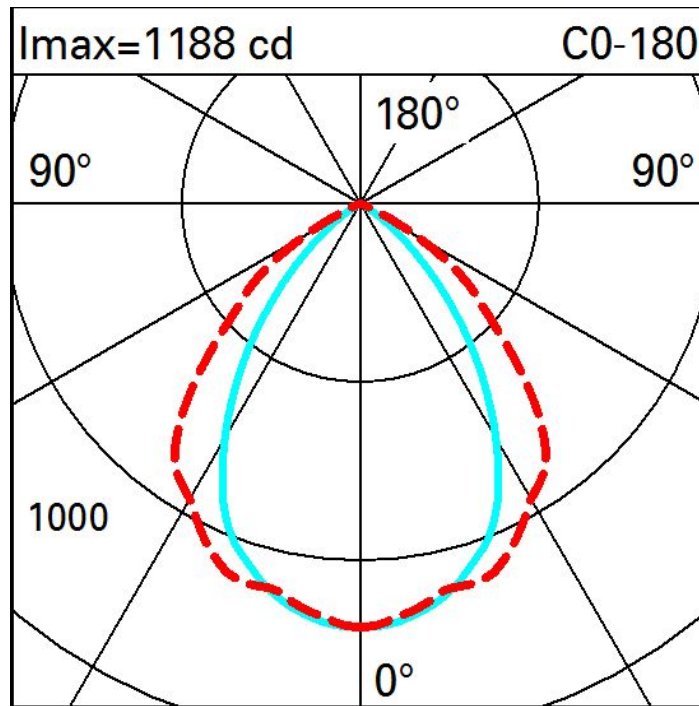

Illuminances

