


Last information update: April 2024

**Product configuration: BV33**

BV33: Ceiling-mounted recessed luminaire with IP66 protection rating, small body with box, Warm White COB Leds, fixed Flood Optic - Dimm. DALI

**Product code**

BV33: Ceiling-mounted recessed luminaire with IP66 protection rating, small body with box, Warm White COB Leds, fixed Flood Optic - Dimm. DALI

**Technical description**

Downlighter designed to use warm white COB Led lamps with a fixed Flood optic. Consists of a round optical assembly, frame, lateral component holder box and an outer casing to be ordered separately where necessary. The optical assembly and frame are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The next painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The tempered sodium-calcium sealing glass is transparent, with customised serigraphy on the edge, 4 mm thick, joined to the frame with silicone. Complete with monochrome Warm White COB LED circuit and an optic with a 99.93% polished super-pure aluminium reflector with a polished, anodized surface and built-in DALI electronic ballast. The lateral component holder box and top end cap are made of high performance black plastic; supplied with a silicone internal seal to guarantee watertightness. The optical assembly and lateral box are connected by a stainless steel threaded connector with a cable gland rubber gasket for a watertight seal. Set up for pass-through wiring using two PG13.5 grey polyamide cable glands, suitable for cables with diameter 8.5÷12.5mm. Ceiling-mounting system consists of special A2 stainless steel screws complete with black aluminium alloy and plastic coupling supports. The frame comes complete with A2 stainless steel captive screws. There is a single tool (No. 3 Allen key) for opening the frame and for the fixing system. The outer casing for concrete ceilings is made of black-painted ready-galvanised sheet aluminium complete with an end cap and threaded bar, to be ordered separately. All external screws used are made of A2 stainless steel.

**Installation**

Recessed in false ceilings 5 - 50mm thick. Hole for preparation of false ceiling  $\phi=125\text{mm}$ . Installed on concrete ceilings using an outer casing, to be ordered separately.

**Colour**

Grey (15)

**Weight (Kg)**

1.3

**Mounting**

ceiling recessed

**Wiring**

Control gear complete with dimmable DALI electronic ballast (220÷240Vac 50/60Hz)

**Notes**


Plastic adapter disk available for flush-mounting the frame on ceilings made of concrete exposed to view (can only be used with the product with aluminium frame, without the stainless cover). Products set up for installation of a stainless steel safety kit L=2000mm..

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	2195	Lamp code:	LED
W system:	19	Number of lamps for optical assembly:	1
Im source:	2890	ZVEI Code:	LED
W source:	19	Number of optical assemblies:	1
Luminous efficiency (Im/W, real value):	115.5	Intervallo temperatura ambiente:	from -20°C to +35°C.
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	5 A / 50 $\mu\text{s}$
Light Output Ratio (L.O.R.) [%]:	76	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
Beam angle [°]:	38°	Minimum dimming %:	1
CRI (minimum):	80	Overvoltage protection:	4kV Common mode & 3kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2
MacAdam Step:	2		

# Polar

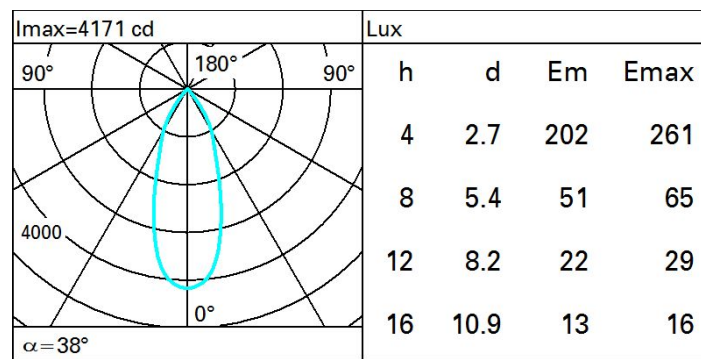

# Isolux

