

Last information update: July 2023

Product configuration: MB52

MB52: Round recessed luminaire - D=226 mm H=103 mm - neutral white - electronic ballast - general light optic

**Product code**MB52: Round recessed luminaire - D=226 mm H=103 mm - neutral white - electronic ballast - general light optic **Attention! Code no longer in production****Technical description**

Recessed fixed round luminaire designed to use a LED lamp. Version with rim for surface-mounting. Multi-faceted reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 2000 lm LED unit in a neutral white tone 4000K and electronic driver separate from the luminaire. General light distribution.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.75

Mounting

ceiling recessed

Wiring

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations



IP20

IP23

On the visible part of the product once installed




pending

Technical data

lm system:	1920	Colour temperature [K]:	4000
W system:	18.8	MacAdam Step:	3
lm source:	2000	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W source:	16	Ballast losses [W]:	2.8
Luminous efficiency (lm/W, real value):	102.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	96	Number of optical assemblies:	1
CRI:	80		


Polar

<div><div>lmax=828 cd</div><div>90°180°90°</div><div>9000°</div><div>α=100°</div></div>	CIE			
	nL 0.96			
	64-97-100-100-96			
	UGR 22.5-22.5			
	DIN			
	A.51			
	UTE			
	0.96C+0.00T			
	F*1=636			
	F*1+F*2=966			
F*1+F*2+F*3=1000				
Lux				
	h	d	Em	Emax
1	2.4	538	791	
2	4.8	134	198	
3	7.2	60	88	
4	9.5	34	49	

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	62	56	51	61	55	55	49	51
1.0	77	69	64	60	68	63	62	57	59
1.5	86	80	76	72	79	75	74	69	72
2.0	91	87	83	80	85	82	81	77	80
2.5	94	90	87	85	89	86	85	81	84
3.0	96	93	90	88	91	89	87	84	87
4.0	98	95	93	91	93	92	90	86	90
5.0	99	97	95	93	95	93	92	88	92

Luminance curve limit

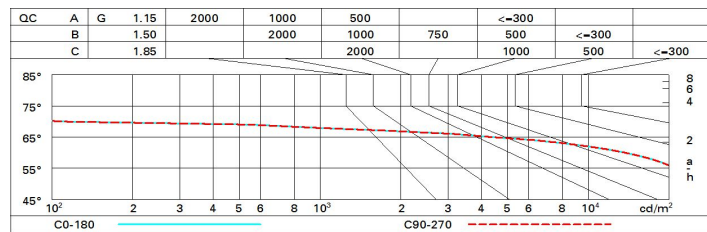

UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	22.7	23.7	23.0	23.9	24.2	22.7	23.7	23.0	23.9	24.2
	3H	22.6	23.5	23.0	23.7	24.0	22.8	23.7	23.2	24.0	24.3
	4H	22.5	23.3	22.9	23.6	23.9	22.8	23.6	23.1	23.9	24.2
	6H	22.5	23.2	22.8	23.5	23.8	22.7	23.4	23.1	23.7	24.1
	8H	22.4	23.1	22.8	23.4	23.8	22.7	23.4	23.0	23.7	24.0
	12H	22.4	23.0	22.8	23.4	23.7	22.6	23.3	23.0	23.6	24.0
4H	2H	22.8	23.6	23.1	23.9	24.2	22.5	23.3	22.9	23.6	23.9
	3H	22.7	23.3	23.1	23.7	24.0	22.6	23.3	23.0	23.6	24.0
	4H	22.6	23.1	23.0	23.5	23.9	22.6	23.1	23.0	23.5	23.9
	6H	22.5	23.0	22.9	23.4	23.8	22.5	23.0	22.9	23.4	23.8
	8H	22.5	22.9	22.9	23.3	23.8	22.5	22.9	22.9	23.3	23.8
	12H	22.4	22.8	22.9	23.2	23.7	22.4	22.8	22.9	23.2	23.7
8H	4H	22.5	22.9	22.9	23.3	23.8	22.5	22.9	22.9	23.3	23.8
	6H	22.4	22.7	22.8	23.2	23.7	22.4	22.7	22.8	23.2	23.7
	8H	22.3	22.6	22.8	23.1	23.6	22.3	22.6	22.8	23.1	23.6
	12H	22.3	22.5	22.8	23.0	23.6	22.3	22.5	22.8	23.0	23.6
12H	4H	22.4	22.8	22.9	23.2	23.7	22.4	22.8	22.9	23.2	23.7
	6H	22.3	22.6	22.8	23.1	23.6	22.3	22.6	22.8	23.1	23.6
	8H	22.3	22.5	22.8	23.0	23.6	22.3	22.5	22.8	23.0	23.6
Variations with the observer position at spacing:											
S =		0.5 / -0.7					0.5 / -0.7				
		1.5 / -5.0					1.5 / -5.0				
		3.0 / -19.7					3.0 / -19.7				