


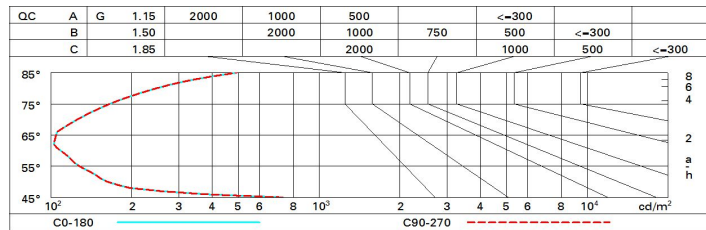

**Coefficienti di utilizzazione**

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	87	85	83	100

**Curva limite di luminanza**



**Diagramma UGR**

Corrected UGR values (at 2550 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	0.9	7.4	7.2	7.7	7.9	0.9	7.4	7.2	7.7	7.9
	3H	0.8	7.3	7.1	7.5	7.8	0.8	7.3	7.1	7.5	7.8
	4H	0.8	7.2	7.1	7.4	7.7	0.7	7.2	7.1	7.4	7.7
	6H	0.7	7.0	7.0	7.4	7.7	0.7	7.0	7.0	7.4	7.7
	8H	0.6	7.0	7.0	7.3	7.7	0.6	7.0	7.0	7.3	7.7
12H	0.6	7.0	7.0	7.3	7.6	0.6	6.9	7.0	7.3	7.6	
4H	2H	0.7	7.2	7.1	7.4	7.7	0.8	7.2	7.1	7.4	7.7
	3H	0.6	6.9	7.0	7.3	7.6	0.6	6.9	7.0	7.3	7.6
	4H	0.5	6.8	6.9	7.2	7.6	0.5	6.8	6.9	7.2	7.6
	6H	0.4	6.7	6.8	7.1	7.5	0.4	6.7	6.8	7.1	7.5
	8H	0.4	6.6	6.8	7.0	7.5	0.4	6.6	6.8	7.0	7.5
12H	0.3	6.6	6.8	7.0	7.5	0.3	6.5	6.8	7.0	7.4	
8H	4H	0.4	6.6	6.8	7.0	7.5	0.4	6.6	6.8	7.0	7.5
	6H	0.3	6.5	6.8	6.9	7.4	0.3	6.5	6.8	6.9	7.4
	8H	0.2	6.4	6.7	6.9	7.4	0.2	6.4	6.7	6.9	7.4
	12H	0.2	6.4	6.7	6.8	7.4	0.2	6.3	6.7	6.8	7.3
12H	4H	0.3	6.5	6.8	7.0	7.4	0.3	6.6	6.8	7.0	7.5
	6H	0.2	6.4	6.7	6.9	7.4	0.2	6.4	6.7	6.9	7.4
	8H	0.2	6.3	6.7	6.8	7.3	0.2	6.4	6.7	6.8	7.4
Variations with the observer position at spacing:											
S =	1.0H	7.0 / -14.5					7.0 / -14.5				
	1.5H	9.8 / -14.7					9.8 / -14.7				
	2.0H	11.8 / -14.8					11.8 / -14.8				