
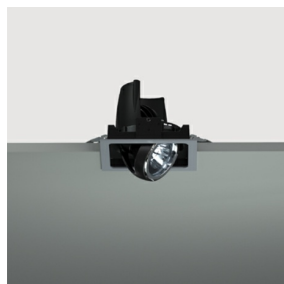


Last information update: June 2023

Product configuration: Q202

Q202: square recessed luminaire - warm white passive dissipation - integrated electronic control gear - wide flood

**Product code**Q202: square recessed luminaire - warm white passive dissipation - integrated electronic control gear - wide flood **Attention! Code no longer in production****Technical description**

Recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Square sheet steel perimeter frame. Main structure made of die-cast aluminium. Steel rotation hinges. Die-cast aluminium lamp body with shaped surface for high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Chrome-plated aluminium lamp body closing ring. Reflector with high efficiency super-pure aluminium optic - wide flood beam angle. Body adjusted using manually operated device: internal 29° - external 75° - rotation about axis 355°. Supplied with electronic control gear connected to the luminaire. Warm white high efficiency LED.

Installation

recessed using steel springs for false ceilings with thicknesses starting at 1 mm; preparation slot 142 x 142 mm

Colour

White / Aluminium (39) | Grey / Black / Aluminium (E1)

Weight (Kg)

0.95

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	2338	CRI:	80
W system:	25.5	Colour temperature [K]:	3000
Im source:	3000	MacAdam Step:	2
W source:	22	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	91.7	Ballast losses [W]:	3.5
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	78	ZVEI Code:	LED
Beam angle [°]:	54°	Number of optical assemblies:	1

Polar


Imax=3107 cd		Lux			
90°	180°	h	d	Em	E _{max}
		2	2	600	773
		4	4.1	150	193
		6	6.1	67	86
		8	8.2	38	48

CIE
nL 0.78
97-100-100-100-78
UGR 16.4-16.4
DIN
A.61
UTE
0.78A+0.00T
F*1=965
F*1+F*2=997
F*1+F*2+F*3=1000
CIBSE
LG3 L<1500 cd/m² at 65°
UGR<19 | L<1500 cd/mq @65°

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	69	65	63	60	65	62	62	59	76
1.0	72	69	66	65	68	66	66	63	81
1.5	76	74	72	70	73	71	70	68	87
2.0	79	77	75	74	76	75	74	71	92
2.5	80	79	78	77	78	77	76	74	95
3.0	81	80	80	79	79	78	77	75	97
4.0	83	82	81	81	80	80	79	77	98
5.0	83	82	82	82	81	81	79	78	99

Luminance curve limit

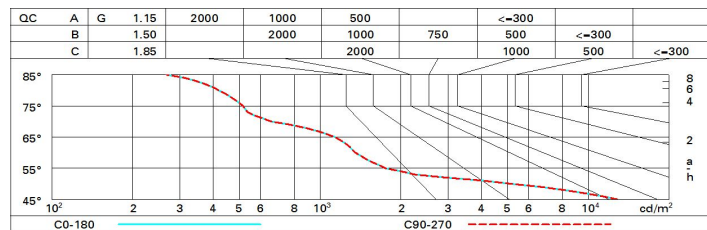

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)										
Reflect.:										
ceiling	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim										
x										
y										
viewed										
crosswise										
viewed										
endwise										
2H	2H	17.0	17.6	17.2	17.8	18.1	17.0	17.6	17.2	17.8
	3H	16.8	17.4	17.1	17.7	17.9	16.8	17.4	17.1	17.7
	4H	16.8	17.3	17.1	17.6	17.9	16.8	17.3	17.1	17.6
	6H	16.7	17.2	17.0	17.5	17.8	16.7	17.2	17.0	17.5
	8H	16.7	17.1	17.0	17.4	17.8	16.6	17.1	17.0	17.4
	12H	16.6	17.1	17.0	17.4	17.7	16.6	17.1	17.0	17.4
4H	2H	16.8	17.3	17.1	17.6	17.9	16.8	17.3	17.1	17.6
	3H	16.6	17.1	17.0	17.4	17.8	16.6	17.1	17.0	17.4
	4H	16.5	16.9	16.9	17.3	17.7	16.5	16.9	16.9	17.3
	6H	16.4	16.8	16.9	17.2	17.6	16.4	16.8	16.9	17.2
	8H	16.4	16.7	16.8	17.1	17.6	16.4	16.7	16.8	17.1
	12H	16.4	16.6	16.8	17.1	17.5	16.4	16.6	16.8	17.1
8H	4H	16.4	16.7	16.8	17.1	17.6	16.4	16.7	16.8	17.1
	6H	16.3	16.6	16.8	17.0	17.5	16.3	16.6	16.8	17.0
	8H	16.3	16.5	16.7	16.9	17.4	16.3	16.5	16.7	16.9
	12H	16.2	16.4	16.7	16.9	17.4	16.2	16.4	16.7	16.9
12H	4H	16.4	16.6	16.8	17.1	17.5	16.4	16.6	16.8	17.1
	6H	16.3	16.5	16.7	16.9	17.4	16.3	16.5	16.7	16.9
	8H	16.2	16.4	16.7	16.9	17.4	16.2	16.4	16.7	16.9
Variations with the observer position at spacing:										
S =	1.0H		5.1	/	-13.5		5.1	/	-13.5	
	1.5H		7.9	/	-14.7		7.9	/	-14.7	
	2.0H		9.9	/	-15.9		9.9	/	-15.9	