

Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	61	57	54	52	56	53	53	50	70
1.0	65	61	58	56	60	57	57	54	75
1.5	69	66	64	62	65	63	62	60	83
2.0	72	69	68	66	68	67	66	64	88
2.5	73	72	70	69	70	69	68	66	92
3.0	74	73	72	71	72	71	70	68	94
4.0	75	74	74	73	73	72	71	69	96
5.0	76	75	74	74	74	73	72	70	97

Curva limite di luminanza

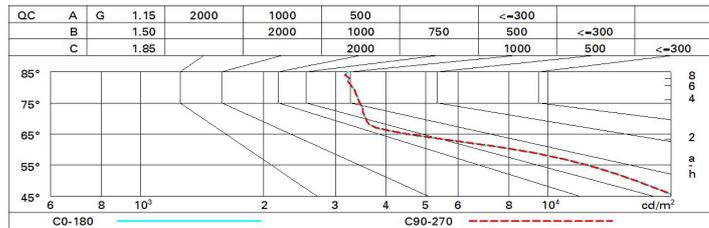


Diagramma UGR

Corrected UGR values (at 1700 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	17.7	18.4	18.0	18.0	18.8	17.7	18.4	18.0	18.0	18.8
	3H	17.7	18.3	18.0	18.0	18.9	17.7	18.4	18.1	18.0	18.9
	4H	17.8	18.3	18.1	18.0	18.9	17.7	18.3	18.0	18.0	18.9
	6H	17.8	18.3	18.1	18.0	18.9	17.6	18.2	18.0	18.5	18.8
	8H	17.8	18.3	18.1	18.0	18.9	17.6	18.1	18.0	18.4	18.8
	12H	17.8	18.2	18.1	18.0	18.9	17.6	18.1	18.0	18.4	18.8
4H	2H	17.7	18.3	18.0	18.0	18.9	17.8	18.3	18.1	18.0	18.9
	3H	17.8	18.3	18.2	18.0	19.0	17.9	18.3	18.2	18.7	19.0
	4H	17.8	18.3	18.2	18.0	19.0	17.8	18.3	18.2	18.0	19.0
	6H	17.9	18.3	18.3	18.7	19.1	17.8	18.2	18.3	18.0	19.0
	8H	17.9	18.3	18.4	18.7	19.1	17.8	18.1	18.2	18.0	19.0
	12H	17.9	18.3	18.4	18.7	19.1	17.8	18.1	18.2	18.5	19.0
8H	4H	17.8	18.1	18.2	18.0	19.0	17.9	18.3	18.4	18.7	19.1
	6H	17.9	18.2	18.4	18.0	19.1	18.0	18.2	18.4	18.7	19.2
	8H	18.0	18.2	18.4	18.7	19.2	18.0	18.2	18.4	18.7	19.2
	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2
12H	4H	17.8	18.1	18.2	18.5	19.0	17.9	18.3	18.4	18.7	19.1
	6H	17.9	18.1	18.4	18.0	19.1	18.0	18.2	18.5	18.7	19.2
	8H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2
Variations with the observer position at spacing:											
S =	1.0H	1.5 / -1.5			1.5 / -1.5						
	1.5H	3.1 / -3.4			3.1 / -3.4						
	2.0H	4.9 / -4.6			4.9 / -4.6						