
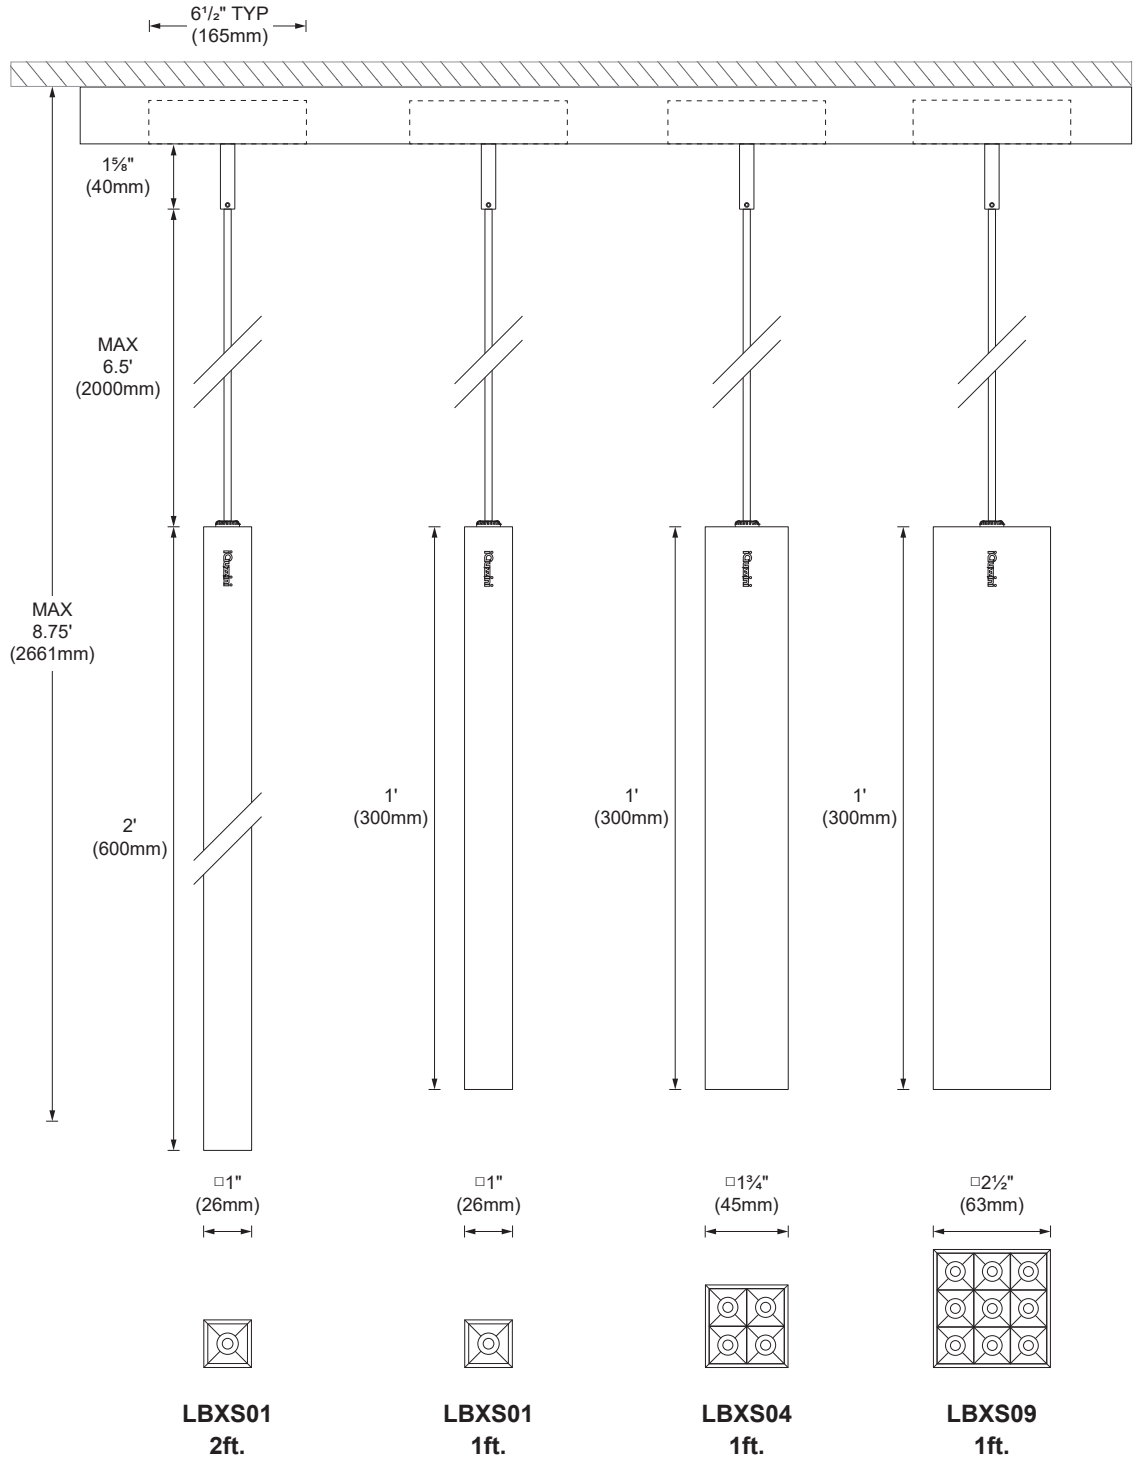


Laser Blade XS pendant is a miniaturised system ideal for zenithal accent lighting with an invisible light source. Despite the ultra compact size of the product, the patented technology of the Opti Beam optic system guarantees an efficient luminous flux and a high level of visual comfort. Perfect for retail and hospitality environments. To be installed on the Superrail 48V track system with a rapid tool-free connecting system. The adapter includes dimming capability allowing each light module to be adjusted separately.

Luminaire characteristics:	Power input: 3.3W to 16.9W (system wattage) Lumens: 160lm to 1245lm (for 3000K, 90CRI) Luminaire efficacy: Up to 74lm/W
Source:	White LED (LM-80), 2700K : 90CRI, 3000K : 90CRI, 3500K : 90CRI, 4000K : 90CRI.
Lumen maintenance:	80% of initial lumens at 50 000 hours (L80) (LM79)
Optics:	Low luminance Opti Beam technology with flood and wide flood distribution. See page 4 for detailed offering.
Material:	Body: extruded aluminum Reflector and baffles: metalized thermoplastic Adapter: thermoplastic
Mounting:	Mechanical fastening with included adapter on Superrail track
Electrical:	Superrail 48V track with remote power supply (Class 2 wiring).
Dimming:	0-10V single channel for complete track control. DALI individual fixture addressing and control. Refer to iGuzzini Superrail track specification for dimming options.
Finish:	Black or white (RAL9010) painted finish.
Weight:	1.05lb (0.48kg) to 1.54lb (0.70kg)
Warranty:	5 year limited warranty.
Ratings:	IP20
Certification:	 cULus listed for dry location

DIMENSIONS



PHOTOMETRIC DATA

Visit iguzzini.com/us for complete photometric data.

TRACK PENDANT MODEL

LBXS01




CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/W)	MAX CANDELA (cd)	MODEL
3000K	90	3.3W	Flood 42°	160	48	336	ILBXS01-SR-TP-930-FL

*USE MULTIPLIER TABLE BELOW FOR OTHER CCT AND CRI OUTPUT DATA

Flood 42° (3000K, 90 CRI)

Center Beam fc	Beam Width ft
0.50ft	1 337 0.37
1.00ft	334 0.75
1.50ft	149 1.12
2.00ft	83.5 1.49
2.50ft	53.5 1.87
3.00ft	37.1 2.24



LBXS04




CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/W)	MAX CANDELA (cd)	MODEL
3000K	90	9.7W	Wide flood 58°	647	66	825	ILBXS04-SR-TP-930-WF

*USE MULTIPLIER TABLE BELOW FOR OTHER CCT AND CRI OUTPUT DATA

Wide flood 58° (3000K, 90 CRI)

Center Beam fc	Beam Width ft
0.50ft	3 260 0.55
1.00ft	815 1.10
1.50ft	362 1.65
2.00ft	204 2.20
2.50ft	130 2.75
3.00ft	90.6 3.30



LBXS09




CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/W)	MAX CANDELA (cd)	MODEL
3000K	90	16.9W	Wide flood 58°	1 245	74	1 586	ILBXS09-SR-TP-930-WF

*USE MULTIPLIER TABLE BELOW FOR OTHER CCT AND CRI OUTPUT DATA

Wide flood 58° (3000K, 90 CRI)

Center Beam fc	Beam Width ft
0.50ft	6 270 0.55
1.00ft	1 568 1.10
1.50ft	697 1.65
2.00ft	392 2.20
2.50ft	251 2.75
3.00ft	174 3.30



CCT options	2700K	3000K	3500K	4000K
CRI options	90CRI	90CRI	90CRI	90CRI
Multiplier	0.92	1	1.06	1.12

ACCESSORIES

(TO BE ORDERED SEPARATELY)

EXTRA LUMINAIRE ADAPTER

- IPB61-01** - White finish
- IPB61-02** - Black finish



ORDERING INFO

ILBXS - SR - TP - - - -
FIXTURE

MODEL

- ILBXS01-SR** - Single on Superrail ⁽¹⁾
- LBXS04-SR** - Four (square) on Superrail ⁽¹⁾
- LBXS09-SR** - Nine (square) on Superrail ⁽¹⁾

MOUNTING

- TP** - Track pendant

PENDANT BODY HEIGHT

- 1 - 1'** (300mm)
- 2 - 2'** (600 mm)

LED

- 927** - 2700K , 90 CRI
- 930** - 3000K, 90 CRI
- 935** - 3500K, 90 CRI
- 940** - 4000K, 90 CRI

OPTIC

- FL** - Flood 42° ⁽²⁾
- WF** - Wide flood 58° ⁽³⁾

FINISH (body finish / baffle finish)

- 01** - White / Black
- 02** - Black / Black
- 31** - White / White

⁽¹⁾ Adapter IPB61 for Superrail included.

⁽²⁾ Available with single model.

⁽³⁾ Available with four or nine square models