

Pixel Plus


Design iGuzzini

iGuzzini

Last information update: May 2024

Product configuration: M352+LED

M352: LED neutral white - medium optic

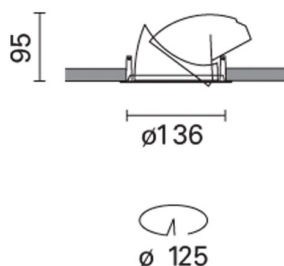

Product code

M352: LED neutral white - medium optic **Attention! Code no longer in production**

Technical description

Recessed luminaire with 12 x 1,6W high output LED lamps. Monochrome emission in a neutralwhite (4200K) tone. Made of die-cast aluminium and thermoplastic material. LED optic with medium beam lenses (17°) made of plastic material. Double adjustability: internal (40°) and external (65°) with continuous friction; 355° rotation about the horizontal axis. Equipped with electronic power supply. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

Installation

Recessed in false ceilings, with thicknesses starting at 1 mm, using special steel torsion springs

Colour

White (01) | Grey (15)

Mounting

ceiling recessed

Wiring

The connection to the power cable is made on the integrated electronic power supply.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	1411.8	CRI:	80
W system:	21	Colour temperature [K]:	4000
lm source:	1790	MacAdam Step:	3
W source:	17	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	67.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	24°		

Polar

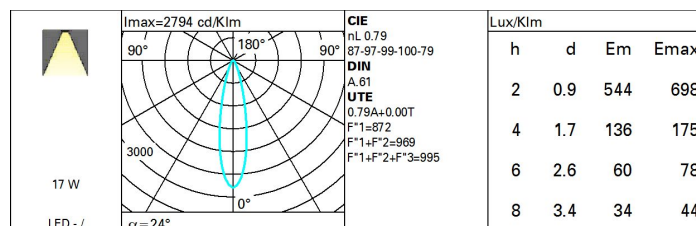

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	67	62	58	56	61	58	58	54	69
1.0	70	66	63	60	65	62	62	59	74
1.5	75	72	69	67	71	69	68	65	82
2.0	78	76	74	72	75	73	72	69	88
2.5	80	78	76	75	77	75	74	72	91
3.0	81	80	78	77	78	77	76	74	94
4.0	82	81	80	79	80	79	78	76	96
5.0	83	82	81	81	81	80	79	77	97

Luminance curve limit

