


Design iGuzzini iGuzzini



Q512: Frame 10 cells - Flood beam - LED

Q512: Frame 10 cells - Flood beam - LED

Linear miniaturised recessed luminaire with 10 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Supplied with DALI power supply unit connected to the luminaire.

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 186.

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Grey / Black (74)* | White / burnished chrome (E7)*

0.55

* Colours on request

wall recessed|ceiling recessed

On the power supply unit with terminal board included.

Complies with EN60598-1 and pertinent regulations




Im system:	1453	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W system:	23.1	Voltage [Vin]:	230
Im source:	1750	Lamp code:	LED
W source:	20	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	62.9	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	83	Inrush current:	9 A / 22 µs
Beam angle [°]:	43°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 20 luminaires B16A: 33 luminaires C10A: 34 luminaires C16A: 56 luminaires
CRI (minimum):	90	Minimum dimming %:	1
Colour temperature [K]:	2700	Overvoltage protection:	2kV Common mode & 1kV Differential mode
MacAdam Step:	2	Control:	DALI-2

	CIE nL 0.83 100-100-100-100-83 UGR <10<10 DIN A.61 UTE 0.83A+0.00T F*1=999 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 Lc1500 cd/m² at 65° UGR<10 L<1500 cd/mq @65°				Lux			
	h	d	Em	Emax				
	2	1.5	607	740				
	4	3.1	152	185				
	6	4.6	67	82				
8	6.1	38	46					

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	87	85	83	100

Luminance curve limit

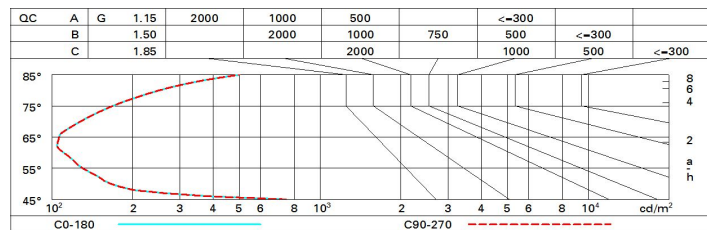

UGR diagram

Corrected UGR values (at 1750 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	7.0	7.5	7.3	7.7	7.9	7.0	7.5	7.3	7.7	7.9
	3H	6.9	7.3	7.2	7.6	7.8	6.9	7.3	7.2	7.6	7.8
	4H	6.8	7.2	7.1	7.5	7.8	6.8	7.2	7.1	7.5	7.8
	6H	6.7	7.1	7.1	7.4	7.7	6.7	7.1	7.1	7.4	7.7
	8H	6.7	7.1	7.1	7.4	7.7	6.7	7.1	7.1	7.4	7.7
	12H	6.7	7.0	7.0	7.4	7.7	6.7	7.0	7.0	7.3	7.7
4H	2H	6.8	7.2	7.1	7.5	7.8	6.8	7.2	7.1	7.5	7.8
	3H	6.7	7.0	7.0	7.3	7.7	6.7	7.0	7.0	7.3	7.7
	4H	6.6	6.9	7.0	7.2	7.6	6.6	6.9	7.0	7.2	7.6
	6H	6.5	6.8	6.9	7.2	7.6	6.5	6.8	6.9	7.1	7.6
	8H	6.4	6.7	6.9	7.1	7.5	6.4	6.7	6.9	7.1	7.5
	12H	6.4	6.6	6.9	7.1	7.5	6.4	6.6	6.8	7.0	7.5
8H	4H	6.4	6.7	6.9	7.1	7.5	6.4	6.7	6.9	7.1	7.5
	6H	6.3	6.6	6.8	7.0	7.5	6.4	6.6	6.8	7.0	7.5
	8H	6.3	6.5	6.8	6.9	7.4	6.3	6.5	6.8	6.9	7.4
	12H	6.3	6.4	6.8	6.9	7.4	6.3	6.4	6.8	6.9	7.4
12H	4H	6.4	6.6	6.8	7.0	7.5	6.4	6.6	6.9	7.1	7.5
	6H	6.3	6.5	6.8	6.9	7.4	6.3	6.5	6.8	7.0	7.4
	8H	6.3	6.4	6.8	6.9	7.4	6.3	6.4	6.8	6.9	7.4
Variations with the observer position at spacing:											
S =	1.0H	7.0 / -14.5					7.0 / -14.5				
	1.5H	9.8 / -14.7					9.8 / -14.7				
	2.0H	11.8 / -14.8					11.8 / -14.8				