


Last information update: October 2023

Product configuration: P007

P007: small body - neutral white - wall washer optic

**Product code**P007: small body - neutral white - wall washer optic **Attention! Code no longer in production****Technical description**

Adjustable spotlight with adapter for installation on electrified track for a linear PCB LED lamp with a Warm White (3000K) tone. Product complete with super pure anodized aluminium reflector to guarantee wall washer light distribution for vertical downlight wall illumination. Electronic ballast integrated in the body. Die-cast aluminium optical assembly. Rotates 360° about the vertical axis and tilts 90° relative to the horizontal plane. Passive heat dissipation. Option of installing an accessory asymmetric screen.

Installation

On an electrified track or base

Colour

Black (04) | Black / White (47)

Weight (Kg)

0.9


Mounting

three circuit track|ceiling surface

Wiring


Product complete with electronic components

Complies with EN60598-1 and pertinent regulations

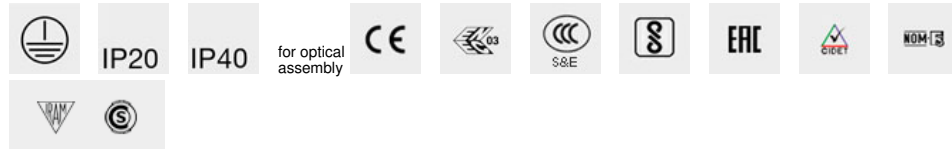**Technical data**

lm system:	1225	Colour temperature [K]:	4000
W system:	17.8	MacAdam Step:	2
lm source:	1750	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	14	Ballast losses [W]:	3.8
Luminous efficiency (lm/W, real value):	68.8	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	70	Number of optical assemblies:	1
CRI (minimum):	80		

Polar

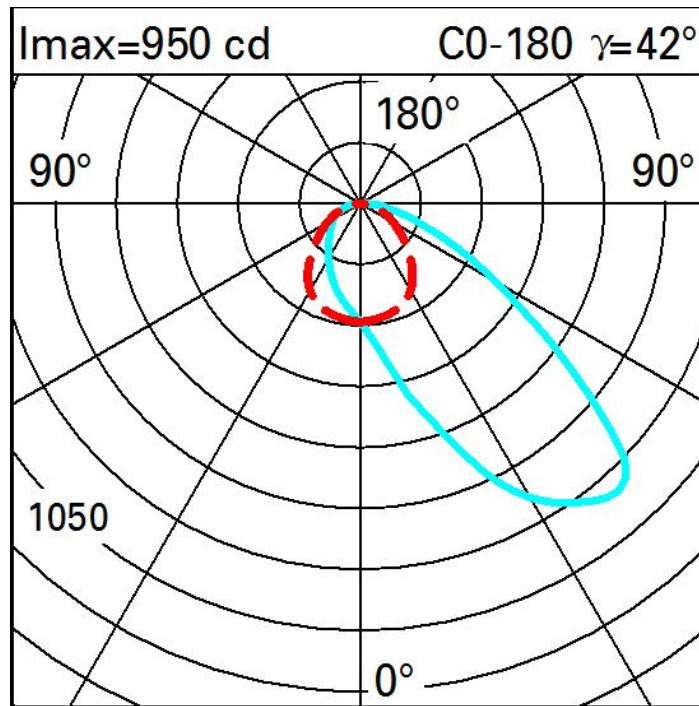

Illuminances

Lux												Wall distance = 1m											
3																							
	2	5	13	42	118	189	118	42	13	5	2												
2	4	9	27	84	227	330	227	84	27	9	4												
	5	12	30	71	132	165	132	71	30	12	5												
1	6	12	25	44	65	74	65	44	25	12	6												
	6	10	17	25	33	35	33	25	17	10	6												
0																							
	m	-2	-1		0	1	2	3															