

Laser Blade XS



Design iGuzzini

iGuzzini

Last information update: May 2024

Product configuration: Q486

Q486: Frame 5 cells - Wideflood beam - LED



Product code

Q486: Frame 5 cells - Wideflood beam - LED **Attention! Code no longer in production**

Technical description

Linear miniaturised recessed luminaire with 5 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 96.

Colour

White (01) | White/Gold (41) | Black / Black (43) | Black / White (47) | Grey / Black (74) | White / burnished chrome (E7)

Weight (Kg)

0.35

Mounting

wall recessed|ceiling recessed

Wiring

On the power supply unit with terminal board included.

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	955	CRI (minimum):	90
W system:	12.7	Colour temperature [K]:	4000
lm source:	1150	MacAdam Step:	2
W source:	9.9	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	75.2	Voltage [Vin]:	230
lm in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	83	ZVEI Code:	LED
Beam angle [°]:	58°	Number of optical assemblies:	1


Polar

<div><div><div>lmax=1216 cd</div><div><div><div><div><div><div></div><div></div></div><div><div>90°</div><div>180°</div><div>90°</div></div><div><div><div><div><div></div><div></div></div><div><div>1000</div><div>0°</div></div></div><div><div><div><div><div></div><div></div></div><div><div>α=58°</div></div></div></div></div></div></div></div></div></div></div></div></div>	CIE nL 0.83 100-100-100-100-83 UGR 17.2-17.2 DIN A.61 UTE 0.83A+0.00T F*1=996 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<19 L<1500 cd/mq @65°		Lux			
	h	d	Em	Emax		
	1	1.1	967	1206		
	2	2.2	242	302		
	3	3.3	107	134		
	4	4.4	60	75		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

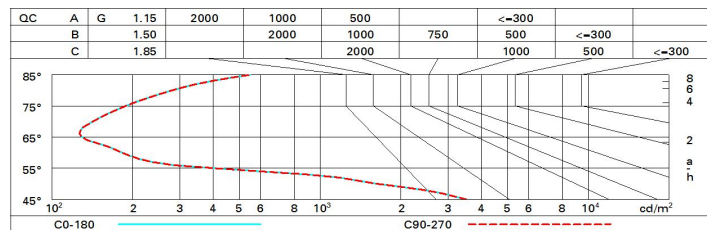

UGR diagram

Corrected UGR values (at 1150 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.8	18.3	18.1	18.5	18.7	17.8	18.3	18.1	18.5	18.7
	3H	17.7	18.1	18.0	18.4	18.6	17.7	18.1	18.0	18.4	18.6
	4H	17.6	18.0	17.9	18.3	18.6	17.6	18.0	17.9	18.3	18.6
	6H	17.5	17.9	17.9	18.2	18.5	17.5	17.9	17.9	18.2	18.5
	8H	17.5	17.9	17.9	18.2	18.5	17.5	17.9	17.9	18.2	18.5
	12H	17.5	17.8	17.8	18.1	18.5	17.5	17.8	17.8	18.1	18.5
4H	2H	17.6	18.0	17.9	18.3	18.6	17.6	18.0	17.9	18.3	18.6
	3H	17.5	17.8	17.8	18.1	18.5	17.5	17.8	17.8	18.1	18.5
	4H	17.4	17.7	17.8	18.0	18.4	17.4	17.7	17.8	18.0	18.4
	6H	17.3	17.5	17.7	17.9	18.4	17.3	17.5	17.7	17.9	18.4
	8H	17.2	17.5	17.7	17.9	18.3	17.2	17.5	17.7	17.9	18.3
	12H	17.2	17.4	17.6	17.8	18.3	17.2	17.4	17.6	17.8	18.3
8H	4H	17.2	17.5	17.7	17.9	18.3	17.2	17.5	17.7	17.9	18.3
	6H	17.1	17.3	17.6	17.8	18.3	17.1	17.3	17.6	17.8	18.3
	8H	17.1	17.3	17.6	17.7	18.2	17.1	17.3	17.6	17.7	18.2
	12H	17.0	17.2	17.5	17.7	18.2	17.0	17.2	17.5	17.7	18.2
12H	4H	17.2	17.4	17.6	17.8	18.3	17.2	17.4	17.6	17.8	18.3
	6H	17.1	17.3	17.6	17.7	18.2	17.1	17.3	17.6	17.7	18.2
	8H	17.0	17.2	17.5	17.7	18.2	17.0	17.2	17.5	17.7	18.2
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				