


Last information update: November 2024

**Product configuration: RR77**

RR77: Pendant-mounted with base - Medium body spotlight - warm white - DALI - FLOOD



**Product code**

RR77: Pendant-mounted with base - Medium body spotlight - warm white - DALI - FLOOD

**Technical description**

Pendant luminaire with ceiling-mounted installation base. High yield LED lamp with high color rendering index. Adjustable pendant spotlight made of die-cast aluminium and thermoplastic material. Die-cast aluminium, ceiling-mounting base. The lower section of the base integrates the balanced pendant system with double steel cable - L max 2000 mm - and adjustment system. Fitted with mechanical aiming locks, so rotation and tilting movements can be locked in position to ensure efficient light aiming even after the original installation or during maintenance. The optical assembly is equipped with an accessory holding ring designed to contain a flat accessory. Another external component can also be applied - asymmetric screen / directional flaps; the external accessories can rotate freely about the spotlight longitudinal axis. DALI dimmable power supply unit integrated in the spotlight body.

**Installation**

Base for ceiling-mounting - fixed to installation surface with screws and screw anchors (not included) - pendant cables L max 2000.

**Colour**

White (01) | Grey (15)

**Weight (Kg)**

1.64

**Mounting**

ceiling pendant

**Wiring**

Integrated DALI dimmer power supply unit. Terminals for connecting to mains network available on the ceiling-mounted base.


Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	3665	CRI (minimum):	90
W system:	37.5	Colour temperature [K]:	3000
lm source:	4470	MacAdam Step:	2
W source:	32	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	97.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	82	Number of optical assemblies:	1
Beam angle [°]:	38°	Control:	DALI-2


**Polar**

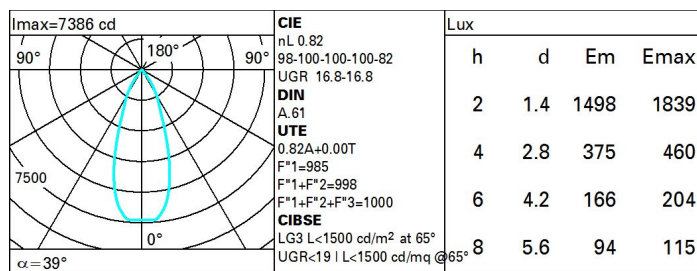

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	67	65	69	66	66	63	77
1.0	77	73	71	69	73	70	70	67	82
1.5	81	78	76	74	77	75	75	72	88
2.0	83	81	80	79	80	79	78	76	92
2.5	85	83	82	81	82	81	80	78	95
3.0	86	85	84	83	84	83	82	80	97
4.0	87	86	86	85	85	84	83	81	99
5.0	88	87	87	86	86	85	84	82	100

Luminance curve limit

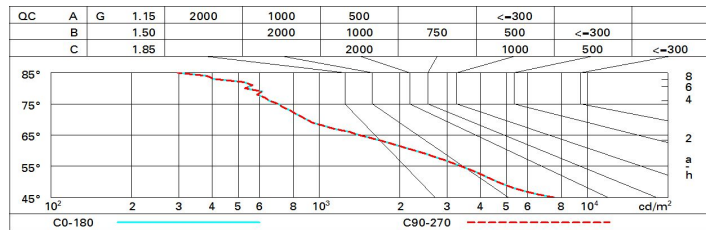

UGR diagram

Corrected UGR values (at 4470 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	17.3	18.0	17.0	18.2	18.4	17.3	18.0	17.0	18.2	18.4
	3H	17.2	17.8	17.5	18.0	18.3	17.2	17.8	17.5	18.0	18.3
	4H	17.1	17.7	17.5	18.0	18.3	17.1	17.7	17.5	18.0	18.3
	6H	17.1	17.5	17.4	17.9	18.2	17.1	17.5	17.4	17.9	18.2
	8H	17.0	17.5	17.4	17.8	18.2	17.0	17.5	17.4	17.8	18.2
12H	17.0	17.4	17.4	17.8	18.1	17.0	17.4	17.4	17.8	18.1	
4H	2H	17.1	17.7	17.5	18.0	18.3	17.1	17.7	17.5	18.0	18.3
	3H	17.0	17.4	17.4	17.8	18.1	17.0	17.4	17.4	17.8	18.1
	4H	16.9	17.3	17.3	17.7	18.1	16.9	17.3	17.3	17.7	18.1
	6H	16.8	17.2	17.3	17.6	18.0	16.8	17.2	17.3	17.6	18.0
	8H	16.8	17.1	17.2	17.5	17.9	16.8	17.1	17.2	17.5	17.9
12H	16.7	17.0	17.2	17.4	17.9	16.7	17.0	17.2	17.4	17.9	
8H	4H	16.8	17.1	17.2	17.5	17.9	16.8	17.1	17.2	17.5	17.9
	6H	16.7	16.9	17.2	17.4	17.9	16.7	16.9	17.2	17.4	17.9
	8H	16.6	16.9	17.1	17.3	17.8	16.6	16.9	17.1	17.3	17.8
	12H	16.6	16.8	17.1	17.3	17.8	16.6	16.8	17.1	17.3	17.8
12H	4H	16.7	17.0	17.2	17.4	17.9	16.7	17.0	17.2	17.4	17.9
	6H	16.6	16.9	17.1	17.3	17.8	16.6	16.9	17.1	17.3	17.8
	8H	16.6	16.8	17.1	17.3	17.8	16.6	16.8	17.1	17.3	17.8
Variations with the observer position at spacing:											
S =	1.0H	5.6 / -12.9					5.6 / -12.9				
	1.5H	8.4 / -15.1					8.4 / -15.1				
	2.0H	10.4 / -17.0					10.4 / -17.0				