

Agorà Life to city



iGuzzini

Lighting innovation for people.

Agorà

Life to City

Design: Jean-Michel Wilmotte

The Agorà floodlight collection designed by J. M. Wilmotte evolves and expands the possibility of pole-mounted installation with MultiAgorà. Two versions - Agorà Slim with remote power supply and Agorà Compact with built-in power supply - can be installed with a single/double flange as well as a single/double arm. In particular, thanks to an accessory, floodlights can be installed on the arm at the same time in the upper and lower parts. Multiple combinations help create a full-scale light project from below using a single pole, thereby minimising visual impact

Agorà Slim

- Remote power supply
- Flat design
- Easy maintenance
- High wind resistance, ideal for pole/flange mounting systems



Agorà Compact

- Built-in power supply
- Compact design
- Easy installation
- Ideal for replacing existing systems



while retaining the broad distribution offering. All the Agorà floodlight optic projectors are available, with up to 14 light distributions, from Super Spot to Very Wide Flood, as well as the possibility of adapting the luminous flux with a wide range of professional accessories.

Agorà




MultiAgorà

Multiple combinations of Agorà Compact with different types of installation, on a single pole or on vertical and horizontal surfaces, offering optical flexibility and formal purity.



The X572 accessory also makes it possible to install third-party cameras, loudspeakers and sensors. For technical details, contact iGuzzini.

LED MAGAZINE
BRIGHTSTAR
AWARDS
HONOREE

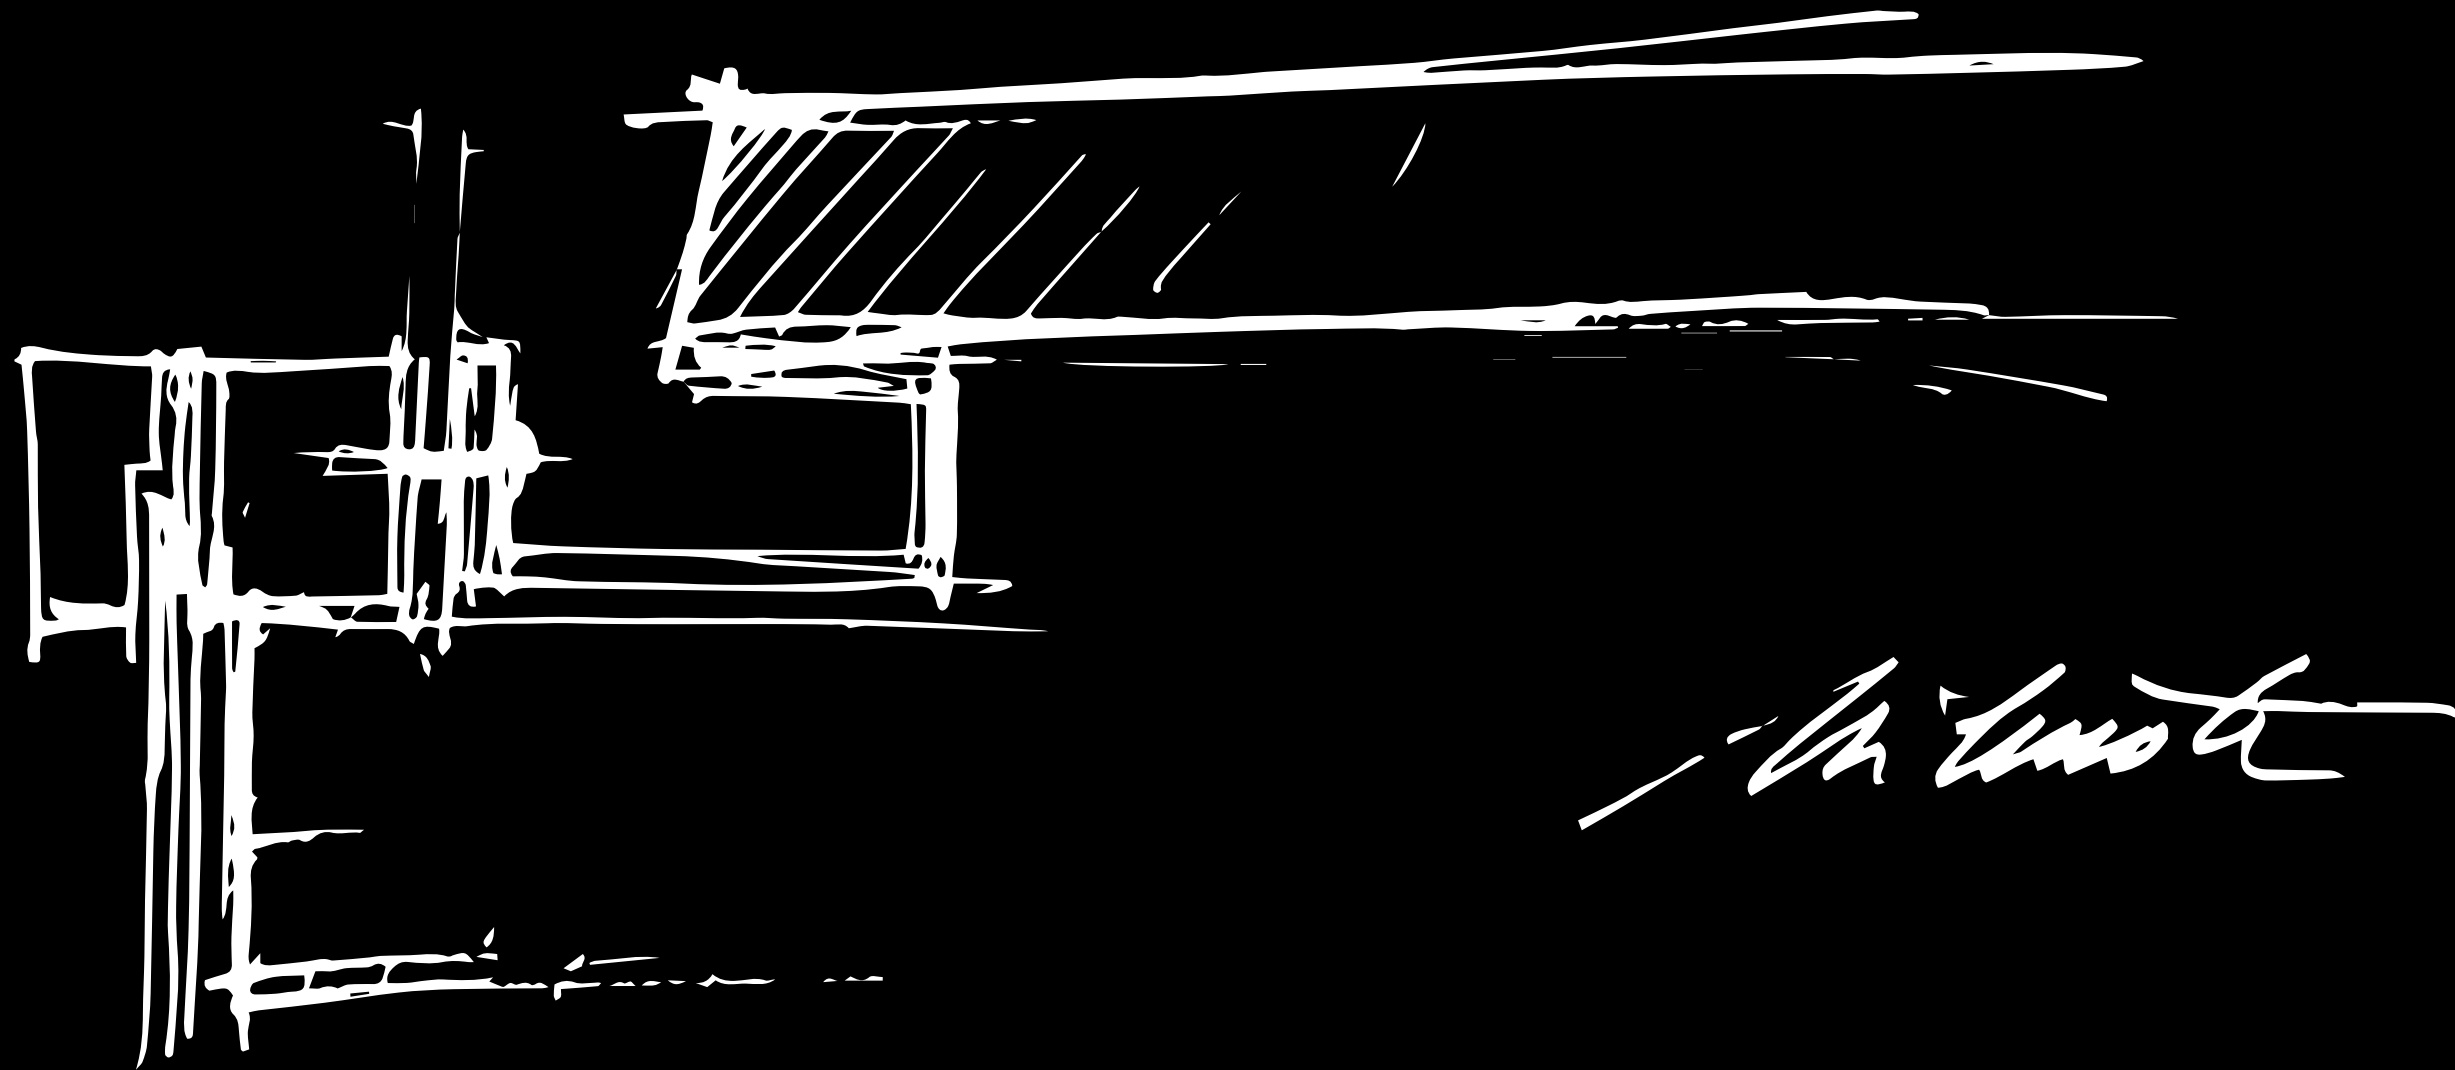

“When you work with iGuzzini, you know that each model must have several operating functions. Consequently, Agorà is a great solution for streets, pedestrians and public spaces ”.



Jean-Michel Wilmotte / Willmotte & Associés



The circular, compactness design and attention to the tiniest details reveal an essential and elegant character. Architect J.M. Wilmotte has looked after every aesthetic and functional detail, focusing on a plurality of applications in the urban context. Agorà's design minimizes the overall dimensions, combining solid and void spaces to give volume exclusively to the function. Agorà Slim and Agorà Compact versions are now available with remote and built-in power supplies respectively.

A multitude of optics

With **14 light distributions** ranging from Super Spot to Wide Flood, and the ability to combine multiple Agorà Compact and Agorà Slim fixtures, you can easily create full-scale lighting projects.

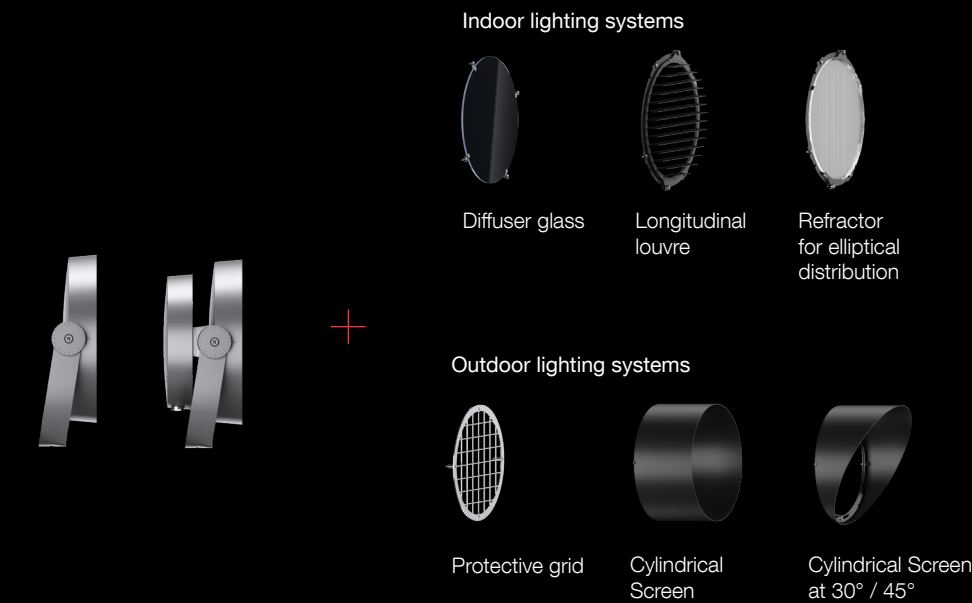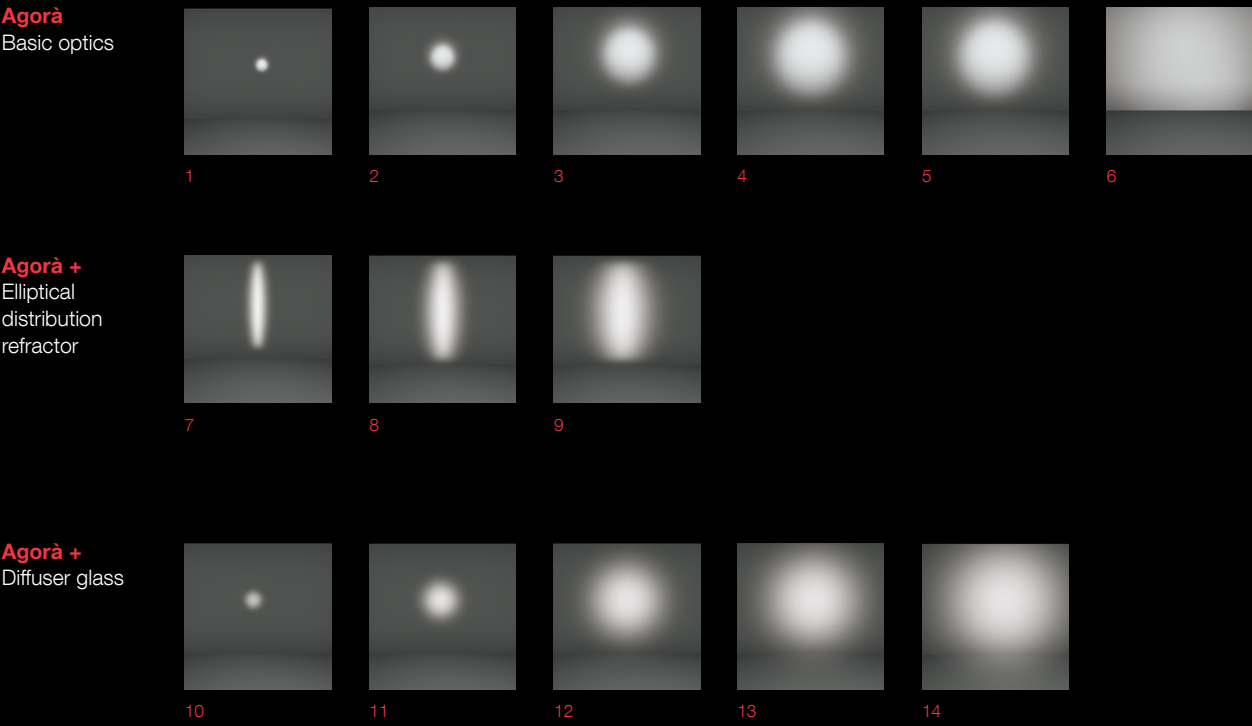

Multiple applications

1. Super Spot (SS) α 4°

Application: Agorà \varnothing 20.5" (\varnothing 516 mm) with very high performance and luminous flux for illumination up to great heights.
Installation: pole-mounted at a height of 12 m.

2. Spot (SP) α 16°

Application: Agorà \varnothing 12.5" (\varnothing 313 mm), a high performance optic used to illuminate architectural details.
Installation: surface mount.

3. Flood (FL) α 30°

Application: Agorà \varnothing 20.5" (\varnothing 516 mm) with very high performance and luminous flux for illumination up to heights.
Installation: pole-mounted at a height of 12 m.

4. Wide Flood (WF) α 44°

Application: Agorà \varnothing 14.5" (\varnothing 368 mm), high performance for uniform distribution over façades.
Installation: on bracket.

5. Very Wide Flood (VWF)

Application: Agorà \varnothing 12.5" (\varnothing 313 mm) controlled luminous flux and broad light distribution over the façade.
Installation: surface mount.

6. Wall Washer (WW)

Application: Agorà \varnothing 14.5" (\varnothing 368) mm optic designed to illuminate the entire surface at the same intensity.
Installation: surface mount, exploiting the height of the adjacent building.

7. Super Spot + Refractor for elliptical distribution

Application: Agorà \varnothing 20.5" (\varnothing 516 mm) with elliptical refractor; the ideal ogival optic for this architecture.
Installation: surface mount.

8. Spot + Refractor for elliptical distribution

Application: Agorà \varnothing 14.5" (\varnothing 368 mm) with elliptical refractor, the ideal ogival optic ideal for this task.
Installation: surface mount.

9. Flood + Refractor for distribution

Application: Agorà \varnothing 12.5" (\varnothing 313 mm) with elliptical refractor, the ideal ogival optic for this task.
Installation: bracket mount, taking advantage of the height of the building itself.

10. Super Spot + Diffuser glass

Application: Agorà \varnothing 12.5" (\varnothing 313 mm) precision yet with less distinct edges to unify light distribution in height.
Installation: surface mount.

11. Spot + Diffuser glass

Application: Agorà \varnothing 12.5" (\varnothing 313 mm) with diffuser accessory for uniform light distribution.
Installation: surface mount.

12. Flood + Diffuser glass


Application: Agorà \varnothing 14.5" (\varnothing 368) mm with diffuser accessory for uniform light distribution.
Installation: bracket mount, taking advantage of the height of the building itself.

13. Wide Flood + Diffuser glass

Application: Agorà \varnothing 313 mm with diffuser accessory for complete uniformity.
Installation: surface mount.

14. Very Wide Flood + Diffuser glass




Application: Agorà \varnothing 313 mm with diffuser accessory for maximum uniformity.
Installation: surface mount.

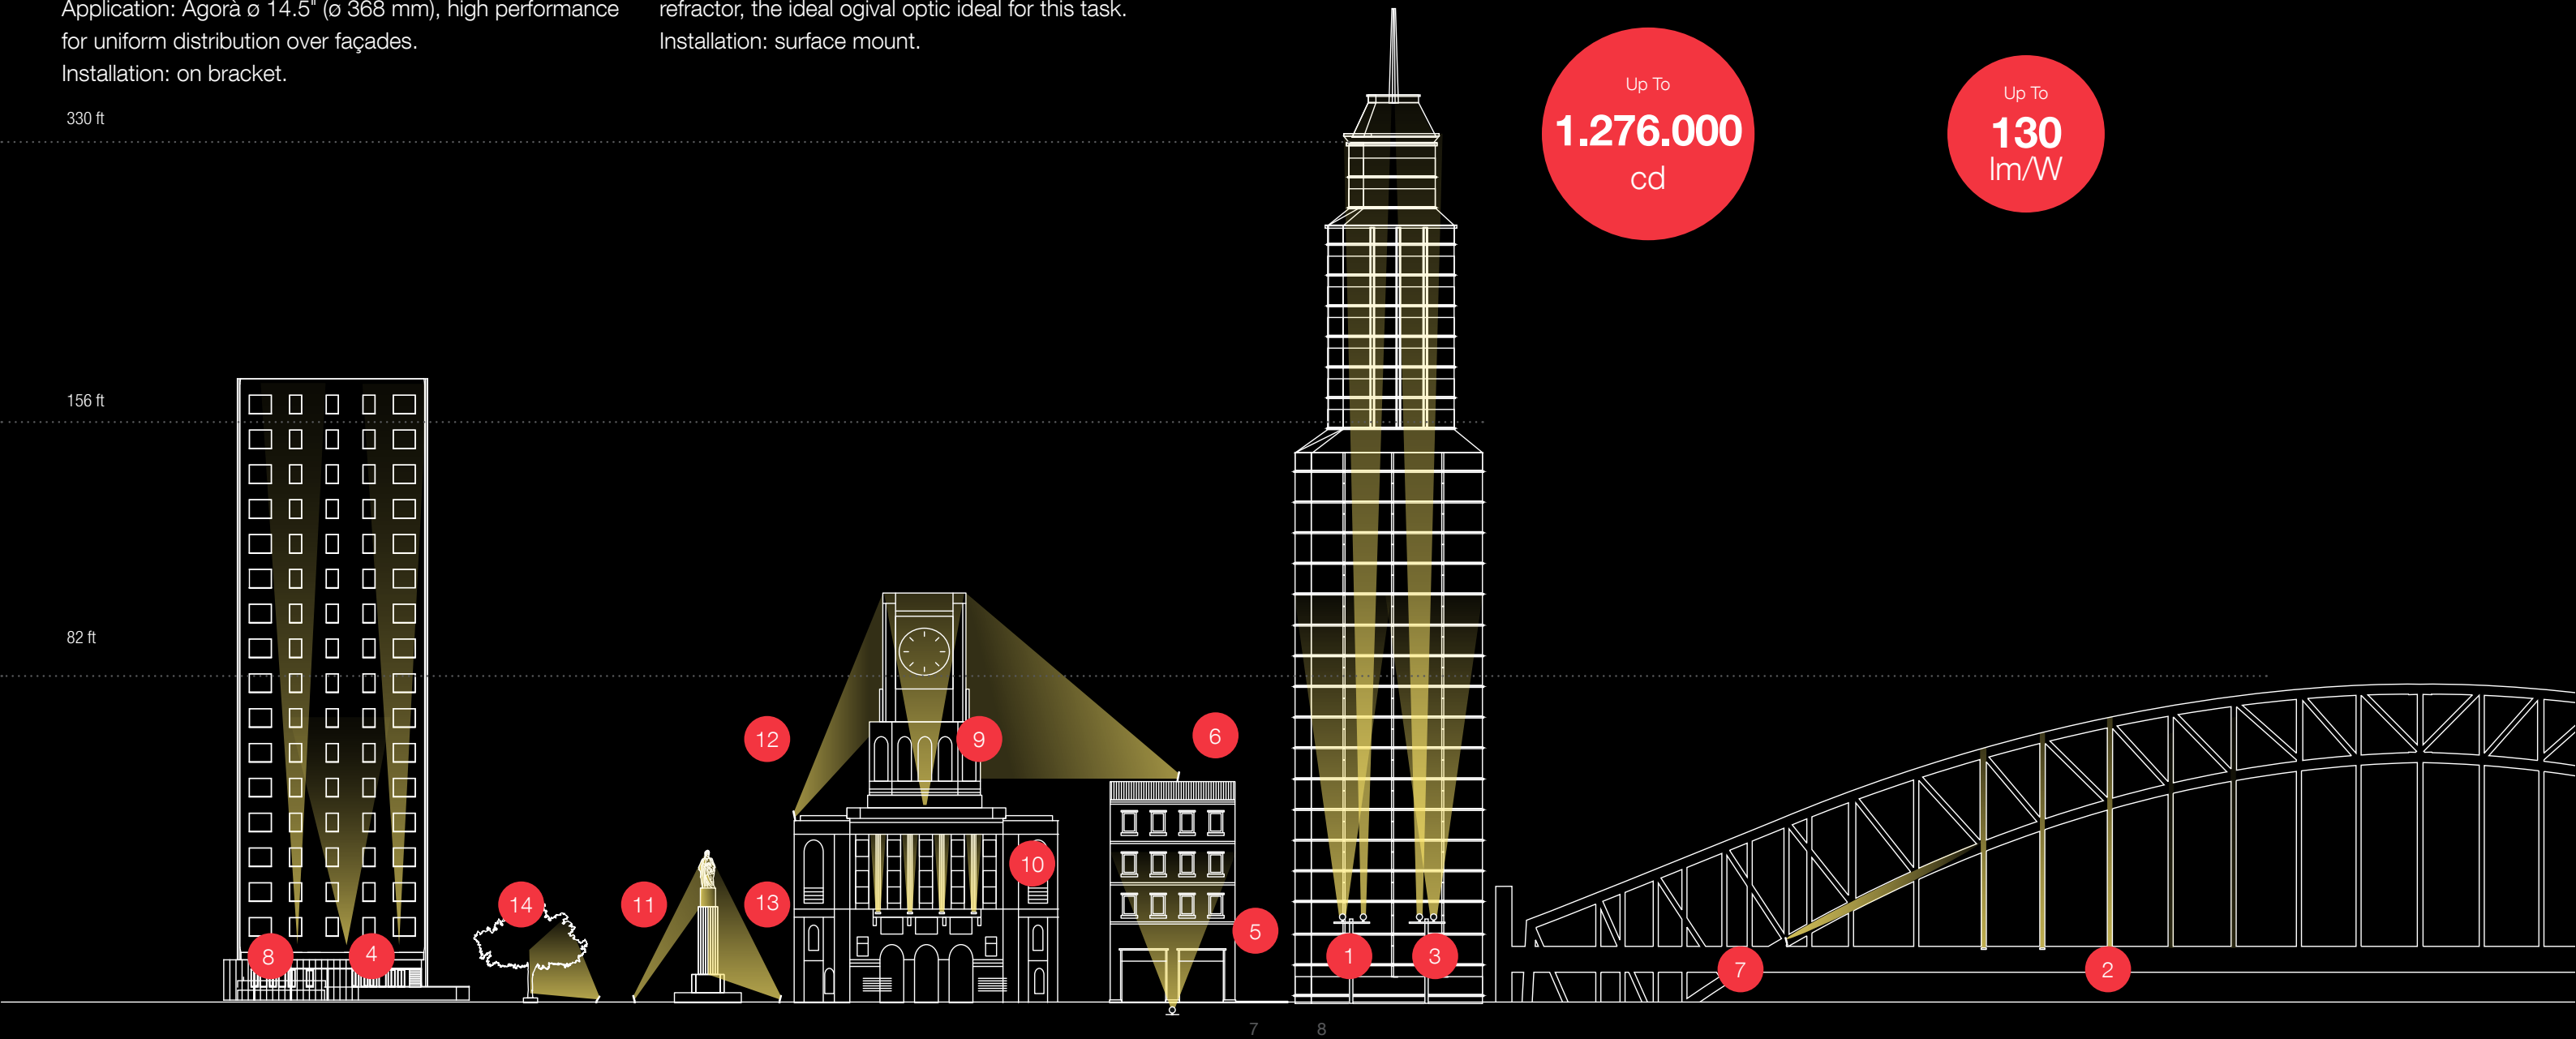

Perfect Effect

Patented Opti Beam triple optical technology to optimize the light emission quality and technical effectiveness. Lighting effect free of chromatic or geometric aberrations.

Perfect Effect
We have eliminated the double ring effect, thereby achieving a well-defined light circle. The intensity at the limit angle is close to 50% max intensity

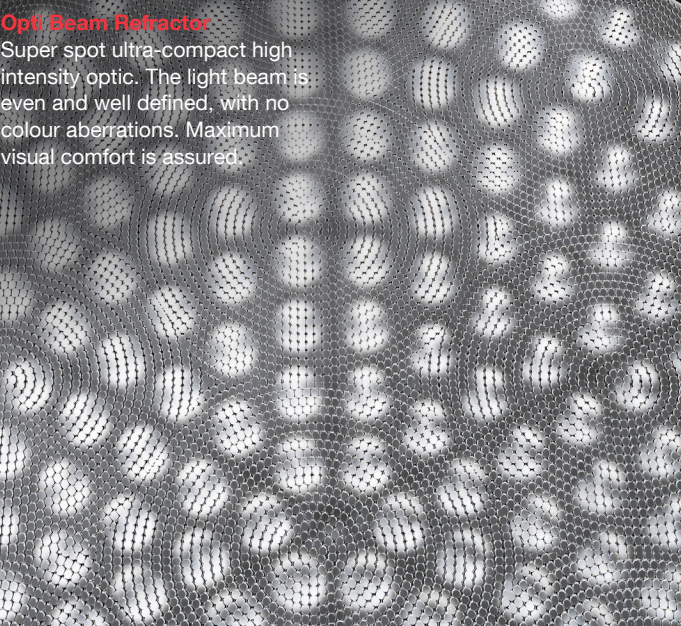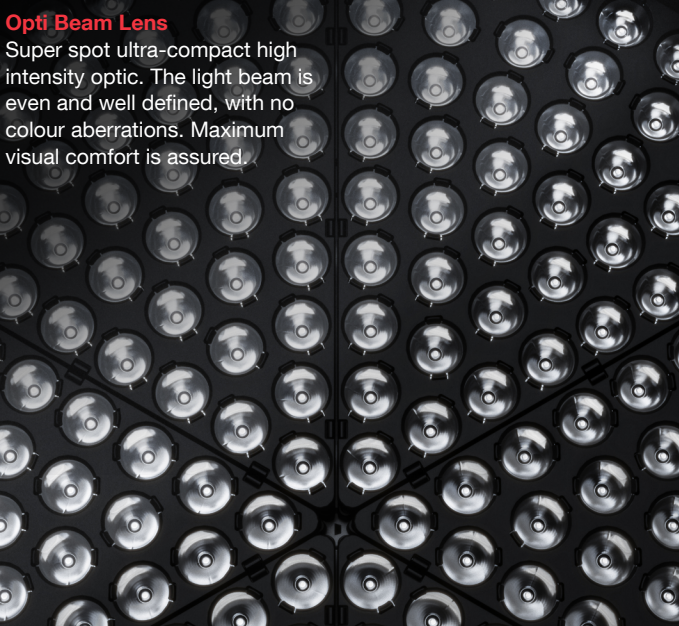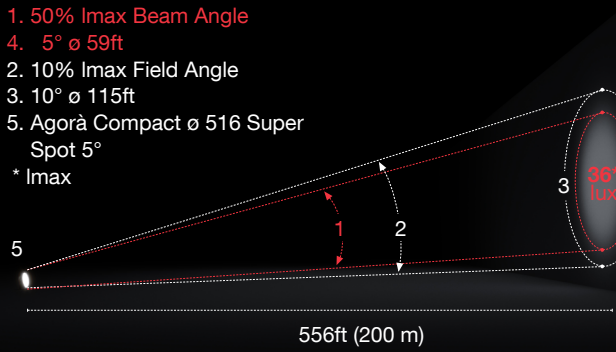

Overview

Agorà

Slim Remote power supply



ø 10" (ø 254 mm)
4°/16°/30°/50°/WW
30.5W → 39.8W
1880lm → 4160lm



ø 12.5" (ø 313 mm)
4°/16°/30°/50°/WW
66.4W → 100.6W
3850lm → 10390lm



ø 14.5" (ø 368 mm)
4°/16°/30°/44°
95.7W → 175.7W
5425lm → 19030lm



ø 20.5" (ø 516 mm)
4°/16°/28°/44°
158.3W → 268.6W
8040lm → 29460lm



Standart bracket



Short bracket



Multiple Support

Compact Built-in LED driver



ø 10" (ø 254 mm)
4°/16°/30°/50°/WW
30.5W → 39.8W
1880lm → 4160lm



ø 12.5" (ø 313 mm)
4°/16°/30°/50°/WW
50.8W → 86.9W
3040lm → 9400lm



ø 14.5" (ø 368 mm)
4°/16°/30°/44°
89.3W → 161.8W
5230lm → 17725lm



ø 20.5" (ø 516 mm)
4°/16°/28°/44°
158W → 267.3W
9310lm → 29660lm

36°/46°/78°
252.3W → 306.9W
22347lm → 40290lm






Available for both Agorà Compact
and Agorà Slim

Chromatic dynamism

Broad ranging flexibility of optics and colour temperatures.

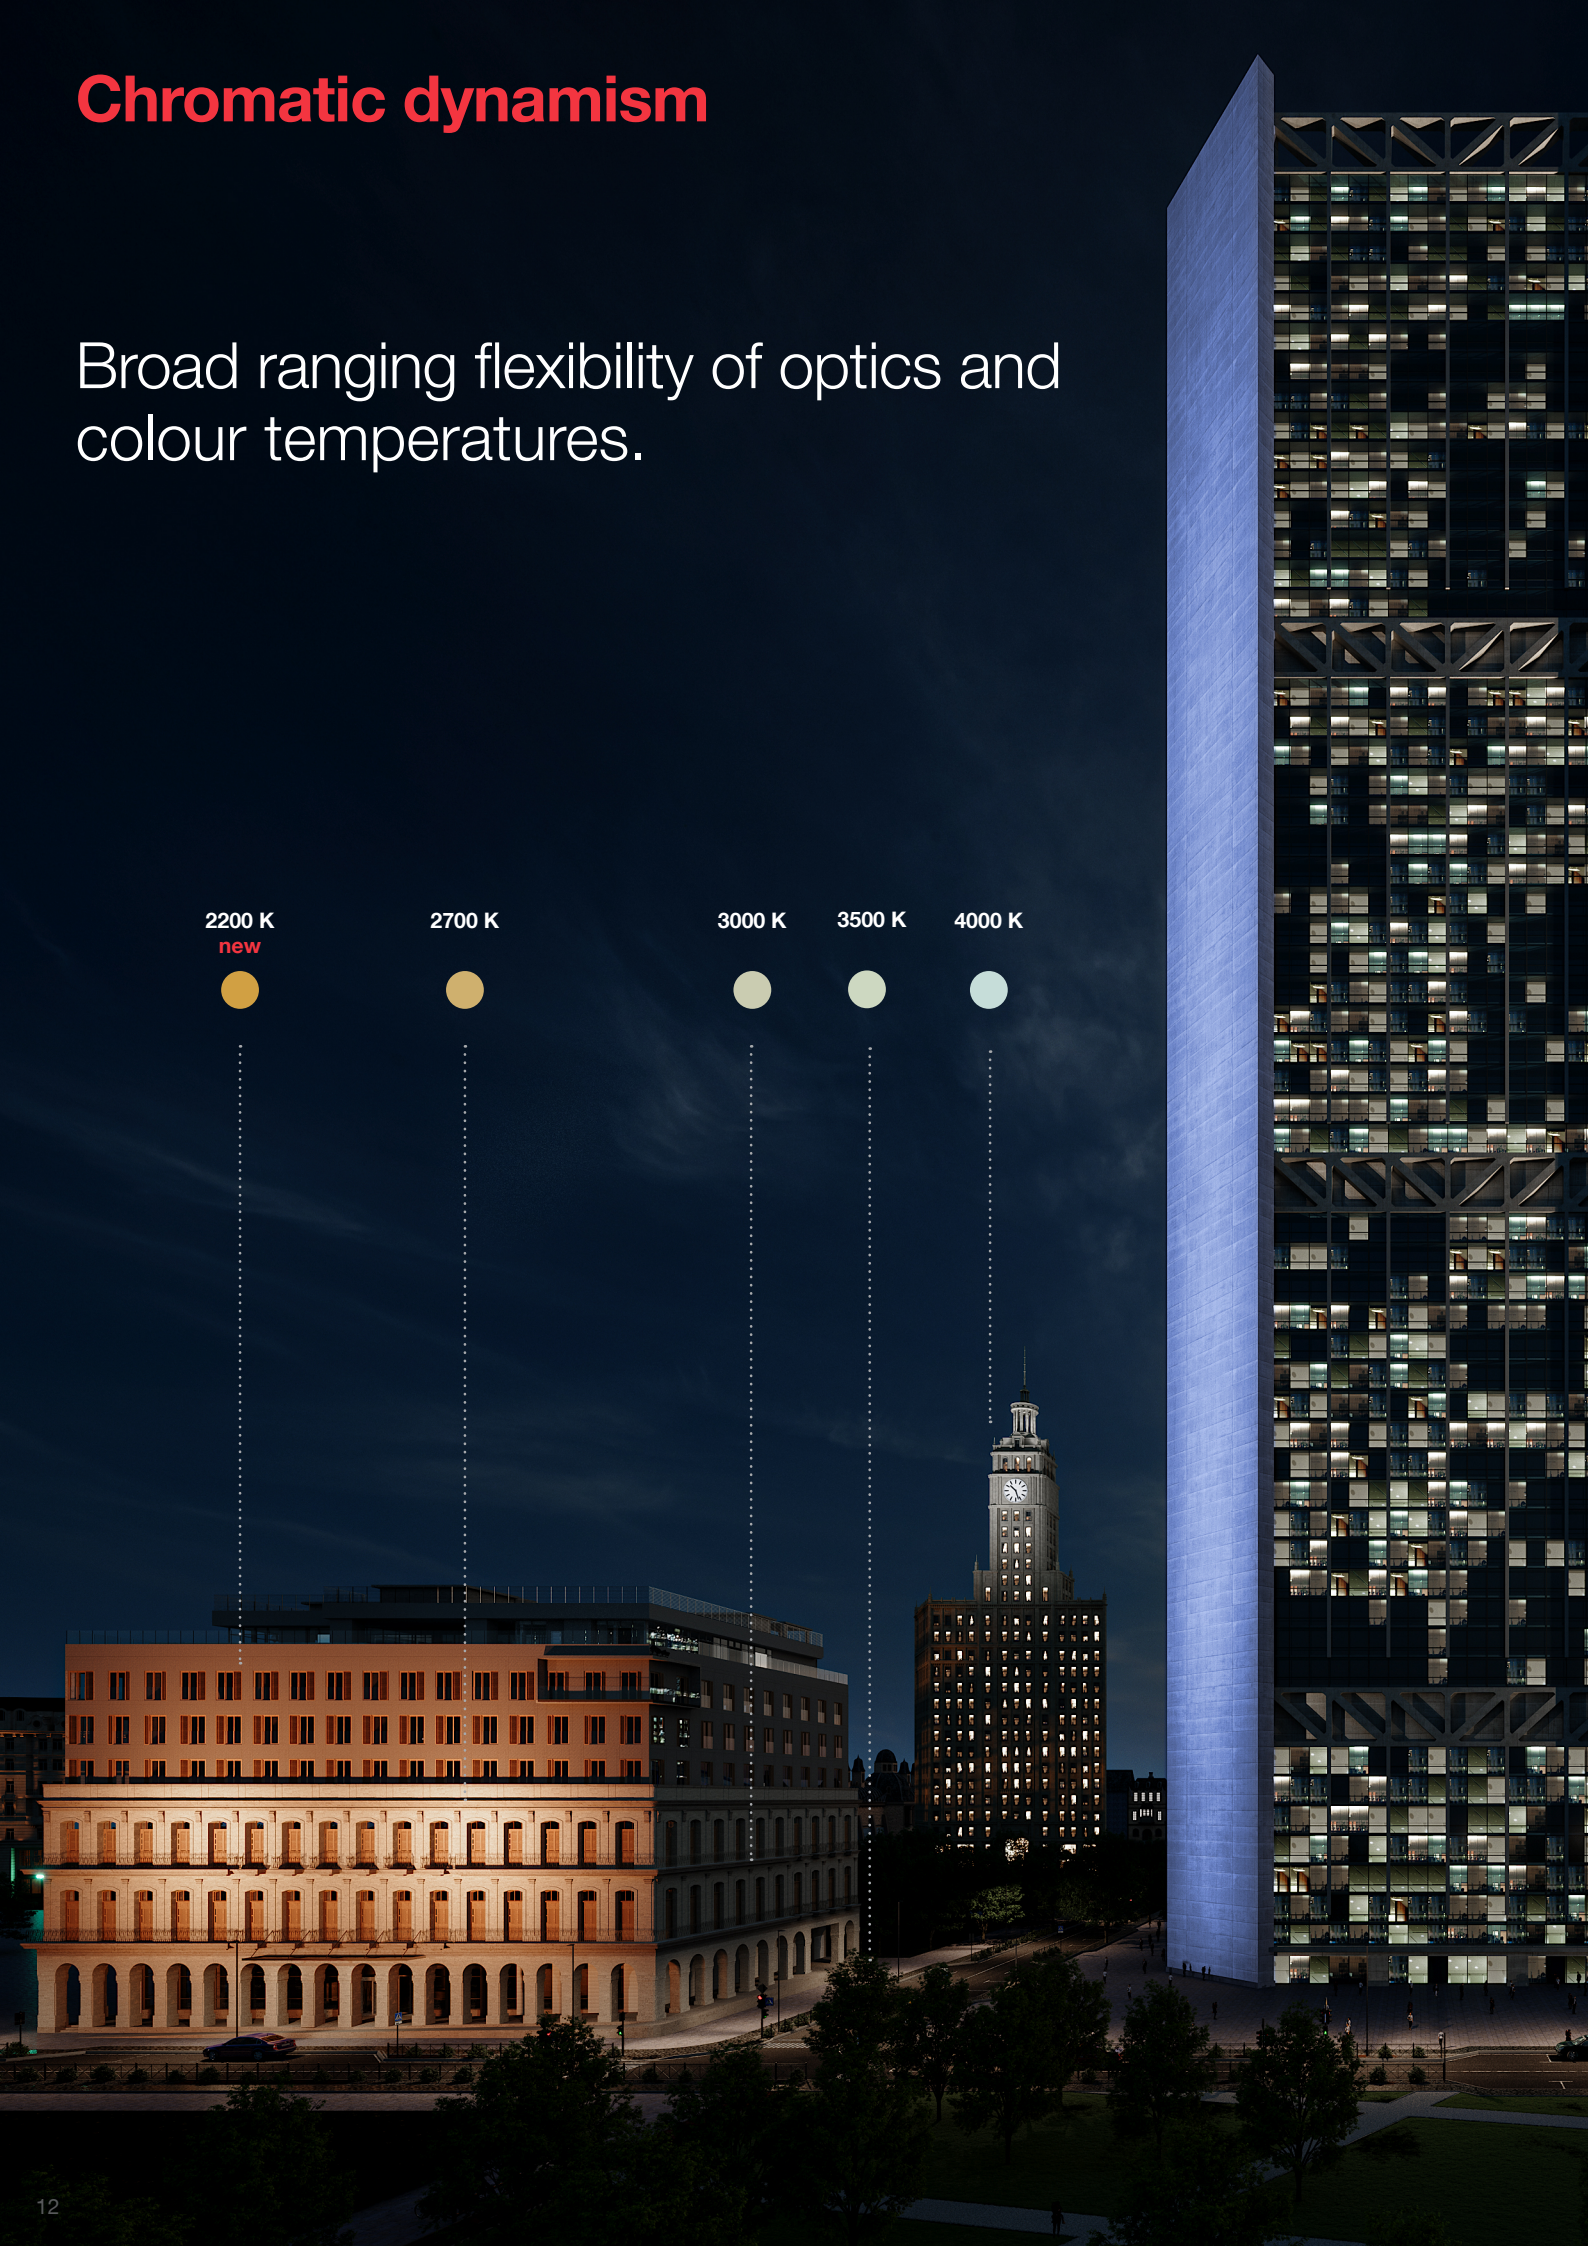

Designed to be Circular

Agorà is intended to last a long time, with low energy consumption and very high reliability. At the end of its useful life, it is not scrapped but turns into something else. Agorà is circular in form and function.

Durable and recyclable materials

Built in aluminium and glass - durable materials that can be recycled countless times without losing quality. Surface treatment makes it even more resistant to corrosion and atmospheric agents.

recycled
> 60 %


recyclable
> 95 %

renewable sources
> 25 %



Reliability over time


Guaranteed performance even at extreme temperatures. Shock resistant with IK-08 up to IK10 (with protection grid). Totally protected against dust and waves on open seas, IP66.



Long life LEDs and electronics

We select high quality, reliable LEDs and electronic components. We design

dissipation systems that keep the operating temperature of the LEDs constant.



L90 B10 100.000 hrs Ta 40°C
L90 > 90.000 hrs a Ta 40°C



Data refers to product code ET27 at Ta 25-°C

Maximum efficiency for minimum impact

Its high efficiency and the possibility of being managed by a control system help Agorà significantly reduce energy

consumption, which involves over 90% of its environmental impact.

10 %
consumption

90 %
environmental impact

