



EZ49: 47 surface Integral – Warm White – 220÷240Vac DALI – L=908mm - Wall Grazing Spot optic



Im system:	2574	MacAdam Step:	3
W system:	39.2	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	3900	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	31	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	65.7	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	66	Number of optical assemblies:	1
CRI (minimum):	80	Intervallo temperatura ambiente:	from -30°C to 50°C.
Colour temperature [K]:	2700	Control:	DALI-2

Polar

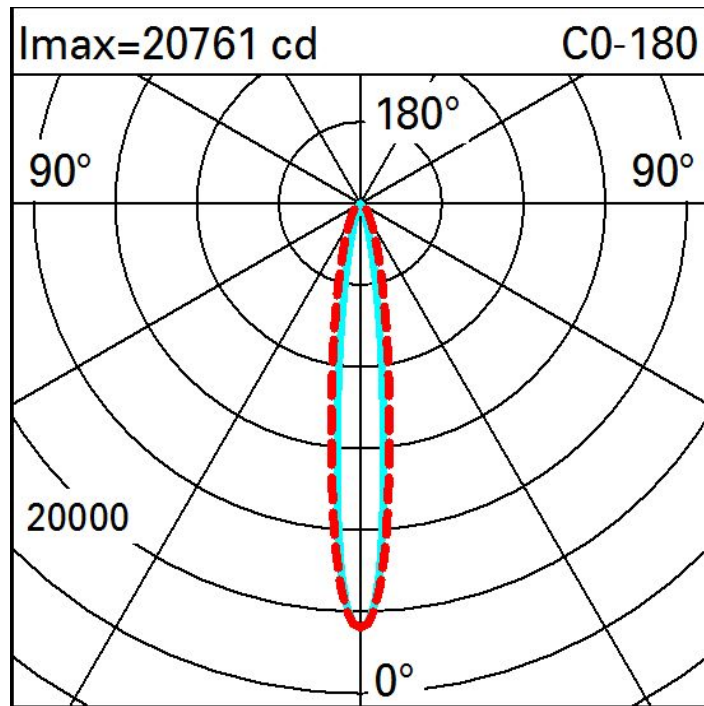

Illuminances

Lux												Wall distance = 1m	
3													
	0.3	0.7	2	5	10	14	10	5	2	0.7	0.3		
2	2	3	6	11	19	24	19	11	6	3	2		
	3	4	7	12	19	24	19	12	7	4	3		
1	3	4	7	11	19	27	19	11	7	4	3		
	3	4	7	11	19	27	19	11	7	4	3		
0													
	m	-2	-1	0	1	2	3						