

Last information update: October 2023

**Product configuration: P301**

P301: 625x625 - neutral White - UGR&lt;19 - DALI

**Product code**P301: 625x625 - neutral White - UGR<19 - DALI **Attention! Code no longer in production****Technical description**

Recessed direct emission luminaire designed to use Neutral White colour 4,000K LEDs and be installed in 625x625 mm modular false ceilings. The optical assembly is made of a thermoplastic material for controlled luminance with a UGR<19 L<3000 cd/m<sup>2</sup> α≥ 65° beam, ideal for environments with video terminals. Product complete with DALI ballast.

**Installation**

recessed in 625x625 mm modular false ceilings

**Colour**

White (01)

**Mounting**

ceiling surface

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20

IP43

On the visible part of  
the product once installed**Technical data**

Im system:	3771	Colour temperature [K]:	4000
W system:	35	MacAdam Step:	3
Im source:	4600	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W source:	30	Ballast losses [W]:	5
Luminous efficiency (Im/W, real value):	107.7	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	82	Number of optical assemblies:	1
CRI:	80	Control:	DALI


**Polar**

Imax=1998 cd		C0-180		CIE		Lux				
90°		180°		nL 0.82						
				62-88-98-100-82						
				UGR 18.4-16.5						
				DIN						
				A.51		2 4.1 2.9 336 499				
				UTE						
				0.82C+0.00T		4 8.3 5.8 84 125				
				F*1=619						
				F*1+F*2=883		6 12.4 8.7 37 55				
				F*1+F*2+F*3=979						
				CIBSE						
				LG3 L<3000 cd/m² at 65°		8 16.6 11.6 21 31				
				UGR<19   L<3000 cd/mq @65°						
α=92° / 72°										

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	59	52	47	43	51	46	46	41	50
1.0	65	58	53	49	57	52	52	47	57
1.5	72	67	62	59	65	62	61	56	69
2.0	76	72	69	66	71	68	67	63	76
2.5	79	75	73	70	74	71	70	67	81
3.0	81	78	75	73	76	74	73	69	85
4.0	83	80	78	77	79	77	76	72	88
5.0	84	82	80	79	80	79	77	74	91

# Luminance curve limit

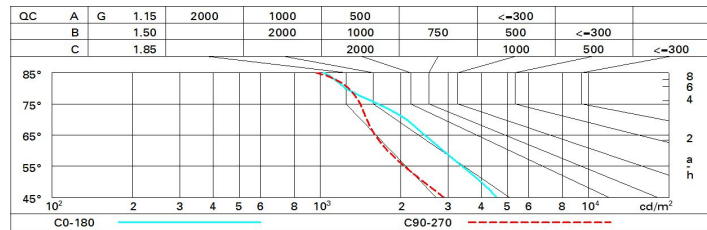

# UGR diagram

Corrected UGR values (at 4000 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	16.5	17.5	16.8	17.8	18.1	14.2	15.2	14.5	15.5	15.7
	3H	17.4	18.3	17.7	18.6	18.9	14.6	15.6	15.0	15.8	16.1
	4H	17.7	18.5	18.0	18.8	19.2	14.8	15.7	15.1	16.0	16.3
	6H	17.8	18.6	18.2	18.9	19.3	14.8	15.6	15.2	16.0	16.3
	8H	17.8	18.6	18.2	19.0	19.3	14.8	15.6	15.2	15.9	16.3
	12H	17.9	18.6	18.3	19.0	19.3	14.8	15.5	15.2	15.9	16.3
4H	2H	16.7	17.6	17.1	17.9	18.2	15.4	16.3	15.8	16.6	16.9
	3H	17.8	18.5	18.2	18.9	19.2	16.0	16.7	16.4	17.1	17.4
	4H	18.1	18.8	18.6	19.2	19.6	16.2	16.9	16.6	17.3	17.7
	6H	18.4	19.0	18.8	19.4	19.8	16.4	17.0	16.8	17.4	17.8
	8H	18.4	19.0	18.9	19.4	19.8	16.5	17.0	16.9	17.4	17.8
	12H	18.5	19.0	18.9	19.4	19.9	16.4	16.9	16.9	17.4	17.8
8H	4H	18.2	18.7	18.7	19.2	19.6	16.8	17.3	17.2	17.7	18.2
	6H	18.5	19.0	19.0	19.4	19.9	17.1	17.5	17.5	17.9	18.4
	8H	18.6	19.0	19.1	19.5	20.0	17.2	17.5	17.6	18.0	18.5
	12H	18.7	19.1	19.2	19.5	20.1	17.2	17.5	17.7	18.0	18.5
12H	4H	18.2	18.7	18.7	19.1	19.6	16.9	17.3	17.3	17.8	18.2
	6H	18.5	18.9	19.0	19.4	19.9	17.2	17.5	17.7	18.0	18.5
	8H	18.7	19.0	19.2	19.5	20.0	17.3	17.6	17.8	18.1	18.6
Variations with the observer position at spacing:											
S =	1.0H	0.2 / -0.3					0.3 / -0.4				
	1.5H	0.6 / -0.9					0.5 / -0.9				
	2.0H	1.4 / -1.3					0.9 / -1.2				