

P174: iplan - neutral white - UGR<19 con L<3.000 cd/m2 para $\alpha \geq 65^\circ$ - DALI

Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	51	45	41	38	44	40	40	36	52
1.0	55	50	46	43	49	45	45	41	59
1.5	61	57	53	50	56	53	52	48	70
2.0	65	61	58	56	60	57	56	53	77
2.5	67	64	61	59	62	60	60	56	82
3.0	68	66	64	62	64	62	61	59	85
4.0	70	68	66	65	66	65	64	61	88
5.0	71	69	68	66	68	66	65	63	91

Curva límite de luminancia

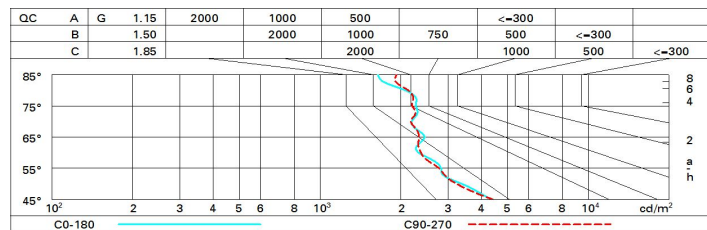


Diagrama UGR

Corrected UGR values (at 6150 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	15.5	16.5	15.8	16.8	17.0	15.5	16.5	15.8	16.8	17.0
	3H	16.4	17.3	16.8	17.6	17.9	15.7	16.6	16.1	16.9	17.2
	4H	16.9	17.7	17.3	18.0	18.3	15.8	16.6	16.1	16.9	17.2
	6H	17.3	18.1	17.7	18.4	18.8	15.8	16.6	16.2	16.9	17.2
	8H	17.5	18.2	17.9	18.6	18.9	15.8	16.5	16.2	16.9	17.2
	12H	17.6	18.3	18.0	18.6	19.0	15.8	16.5	16.2	16.8	17.2
4H	2H	15.8	16.6	16.2	16.9	17.2	16.9	17.7	17.3	18.0	18.3
	3H	16.9	17.6	17.3	18.0	18.3	17.3	18.0	17.7	18.4	18.7
	4H	17.5	18.1	17.9	18.5	18.9	17.5	18.1	17.9	18.5	18.9
	6H	18.1	18.6	18.5	19.1	19.5	17.7	18.3	18.1	18.7	19.1
	8H	18.3	18.8	18.8	19.2	19.7	17.8	18.3	18.2	18.7	19.1
	12H	18.5	18.9	18.9	19.4	19.8	17.8	18.2	18.3	18.7	19.1
8H	4H	17.8	18.3	18.2	18.7	19.1	18.4	18.9	18.8	19.3	19.7
	6H	18.5	19.0	19.0	19.4	19.9	18.7	19.1	19.2	19.6	20.1
	8H	18.9	19.2	19.3	19.7	20.2	18.9	19.2	19.4	19.7	20.2
	12H	19.1	19.4	19.6	19.9	20.4	19.0	19.3	19.5	19.8	20.4
12H	4H	17.8	18.3	18.3	18.7	19.2	18.5	19.0	19.0	19.4	19.9
	6H	18.6	19.0	19.1	19.5	20.0	18.9	19.3	19.4	19.8	20.3
	8H	19.0	19.3	19.5	19.8	20.3	19.2	19.5	19.7	20.0	20.5
Variations with the observer position at spacing:											
S =	1.0H	0.4 / -0.3					0.4 / -0.3				
	1.5H	1.0 / -0.7					1.0 / -0.7				
	2.0H	1.8 / -1.0					1.8 / -1.0				