



Last information update: April 2024

**Product configuration: MQ57**

MQ57: Recessed frame - LED - Warm white - integrated Electronic control gear - Diffused lighting

**Product code**MQ57: Recessed frame - LED - Warm white - integrated Electronic control gear - Diffused lighting **Attention! Code no longer in production****Technical description**

Miniaturized recessed rectangular luminaire with LEDs. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Optical system designed for diffused lighting distribution. Flux enhancer - superpure aluminium reflector - microprism screen in transparent PMMA with optimised geometry texture; a special film in acrylic material, combined with the screen, allow for a comfortable level of lighting diffusion. Black polycarbonate internal perimeter frame. Supplied with electronic control gear connected to the luminaire. Warm white LED.

**Installation**

recessed with steel springs for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal) - preparation slot 37 x 141

**Colour**

Black / Black (43) | Black / White (47) | Grey / Black (74)

**Weight (Kg)**

0.35

**Mounting**

wall recessed|ceiling recessed

**Wiring**

on power box: screw connections


Complies with EN60598-1 and pertinent regulations



On the visible part of the product once installed

**Technical data**


Im system:	649	CRI (typical):	92
W system:	12.7	Colour temperature [K]:	3000
Im source:	1100	MacAdam Step:	3
W source:	9.9	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	51.1	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	59	Number of optical assemblies:	1
CRI (minimum):	90		

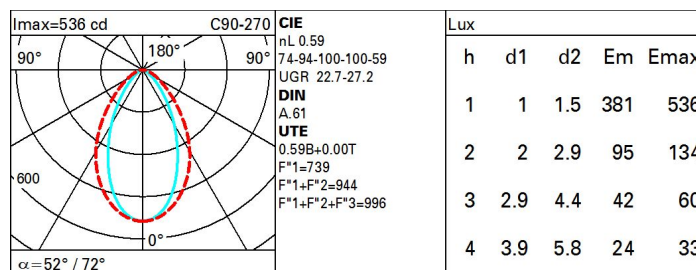**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	46	42	38	36	41	38	38	35	59
1.0	49	45	42	40	45	42	42	39	66
1.5	54	51	49	47	50	48	47	45	76
2.0	57	54	53	51	54	52	51	49	83
2.5	58	57	55	54	56	54	53	51	87
3.0	60	58	57	55	57	56	55	53	90
4.0	61	59	58	57	58	57	57	55	92
5.0	61	60	59	59	59	58	57	56	94

# Luminance curve limit

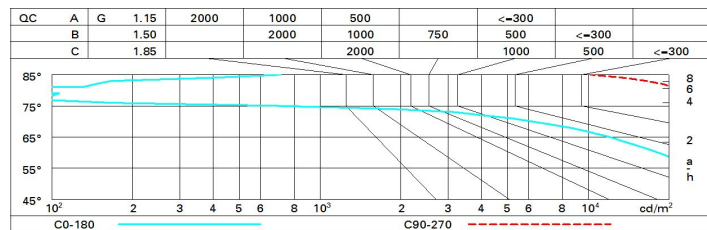

# UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	22.4	23.3	22.7	23.5	23.8	26.3	27.1	26.6	27.4	27.6
	3H	22.4	23.2	22.8	23.5	23.8	26.3	27.1	26.7	27.4	27.7
	4H	22.4	23.1	22.7	23.4	23.7	26.3	27.0	26.6	27.3	27.6
	6H	22.3	22.9	22.6	23.3	23.6	26.2	26.9	26.6	27.2	27.5
	8H	22.2	22.9	22.6	23.2	23.6	26.2	26.8	26.6	27.1	27.5
	12H	22.2	22.8	22.6	23.2	23.5	26.1	26.7	26.5	27.1	27.5
4H	2H	22.9	23.6	23.2	23.9	24.2	27.2	27.9	27.5	28.2	28.5
	3H	23.0	23.6	23.3	23.9	24.3	27.4	28.0	27.7	28.3	28.7
	4H	22.9	23.4	23.3	23.8	24.2	27.4	27.9	27.8	28.3	28.6
	6H	22.8	23.2	23.2	23.7	24.1	27.3	27.8	27.7	28.2	28.6
	8H	22.7	23.2	23.2	23.6	24.0	27.2	27.7	27.7	28.1	28.5
	12H	22.7	23.1	23.2	23.5	24.0	27.2	27.6	27.7	28.0	28.5
8H	4H	22.9	23.3	23.3	23.7	24.2	27.5	28.0	28.0	28.4	28.8
	6H	22.8	23.1	23.3	23.6	24.1	27.5	27.8	28.0	28.3	28.8
	8H	22.7	23.0	23.2	23.5	24.0	27.4	27.7	27.9	28.2	28.7
	12H	22.7	23.0	23.2	23.4	24.0	27.4	27.6	27.9	28.1	28.6
12H	4H	22.8	23.2	23.3	23.7	24.1	27.5	27.9	28.0	28.3	28.8
	6H	22.8	23.1	23.2	23.5	24.0	27.5	27.8	27.9	28.2	28.7
	8H	22.7	23.0	23.2	23.5	24.0	27.4	27.7	27.9	28.2	28.7
Variations with the observer position at spacing:											
S =	1.0H	1.4 / -1.9					0.3 / -0.7				
	1.5H	2.1 / -4.3					1.4 / -1.5				
	2.0H	3.3 / -6.8					2.7 / -2.2				