



Features

cULus IP67 IK10


- Ground-recessed luminaire for drive-over areas designed for LED light source
- Grazing light with one-sided or three sided emission.
- Polished AISI 304-18-8 stainless steel body and screws
- Die-cast black-painted aluminum protection screen
- Watertight molded silicone gasket for protection against dust, dirt, and water penetration.
- Tempered clear safety glass with over 1100 pounds load resistance.
- Outer casing made of cast aluminum ring and PVC housing.

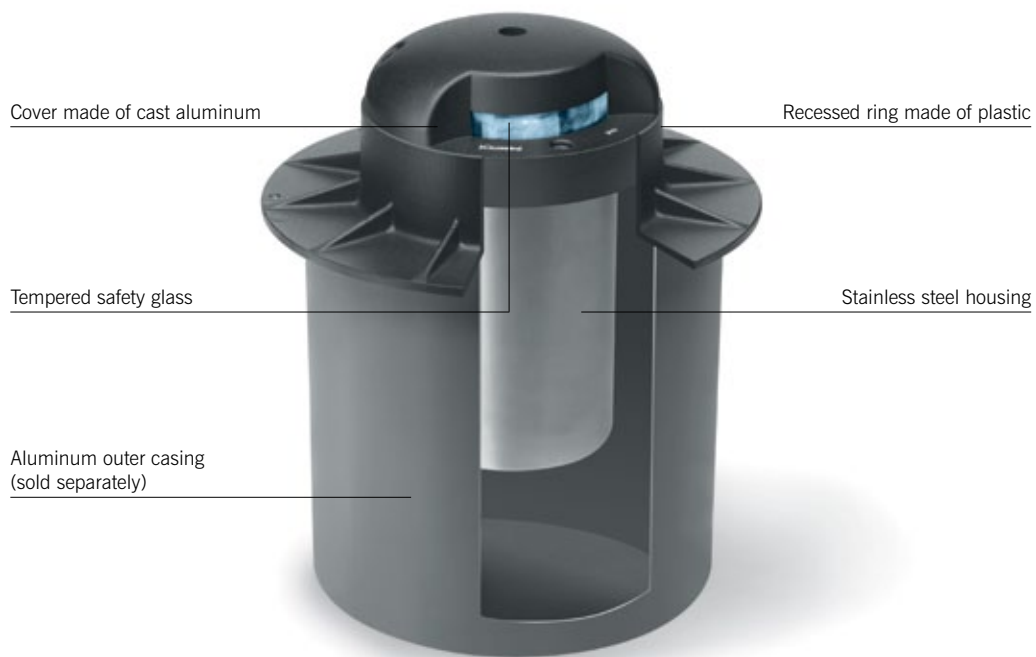


Distribution of light



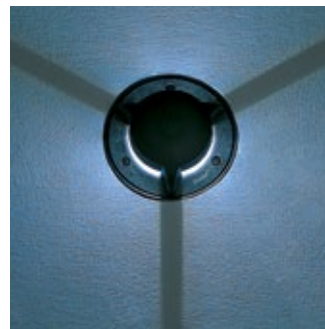



Lighting from one side





Lighting from three sides




source	W	code		code
	One-side lighting			I.5935
	Warm white			
	3 W	3100K		
	Neutral white, red, green or amber LED available on request			
	20 W	I.BF90		



B892-B893-BD77-I. BF90

	Three side lighting		
	Warm white		
	3 W	3100K	I. BD78
	Neutral white, red, green or amber LED available on request		
	20 W	I.BF91	



B897-B898-BD78-I. BF91

Finishes

