Product code

Technical description



iGuzzini

Last information update: April 2025

Product configuration: ET41

ET41: Spotlight with bracket - Tunable White - Integrated control card - Remote power supply - Wide Flood optic - Ta 25°

ET41: Spotlight with bracket - Tunable White - Integrated control card - Remote power supply - Wide Flood optic - Ta 25°

protective grilles) can be used. All external screws used are made of A2 stainless steel.


Spotlight designed to use (White 2200K, 3000K, 4000K) LED lamps, a Wide Flood optic and a DMX512-RDM control. Consists of a

die-cast aluminium optical assembly, bracket and box for the power supply with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The optical system is Opti Beam Lens. The power supply is remote whereas the DMX control card is integrated in the product. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and retractive artillac) and he used.





Installation

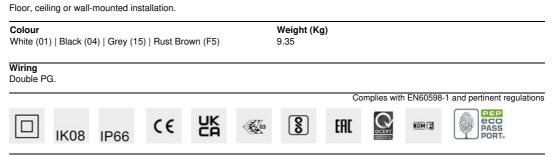

Technical data			
Im system:	8424	Colour temperature [K]:	Tunable white 2200 - 4000
W system:	86.6	MacAdam Step:	3
Im source:	11700	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W source:	79	Voltage [Vin]:	48
Luminous efficiency (Im/W, real value):	97.3	Lamp code:	LED
		Number of lamps for optical	1
Im in emergency mode:	-	assembly:	
Total light flux at or above	0	ZVEI Code:	LED
an angle of 90° [Lm]:		Number of optical	1
Light Output Ratio (L.O.R.)	72	assemblies:	
[%]:		Intervallo temperatura	from -30°C to 35°C.
Beam angle [°]:	48°	ambiente:	
CRI (minimum):	80	Control:	DMX-RDM

