


Design iGuzzini iGuzzini

Produktkonfiguration: 5283+L041
5283: 21WDALI

Wirkungsgrad

R	77	75	73	71	55	53	33	00	DRR
K0.8	40	32	26	21	28	23	21	13	25
1.0	45	36	30	26	32	27	24	16	31
1.5	52	45	39	34	40	35	31	22	42
2.0	56	50	45	40	45	40	36	27	51
2.5	59	54	49	45	48	44	40	30	57
3.0	61	56	52	48	50	47	42	33	61
4.0	64	60	56	53	54	51	46	36	68
5.0	66	62	59	56	56	53	48	38	72

Söller-Diagramm

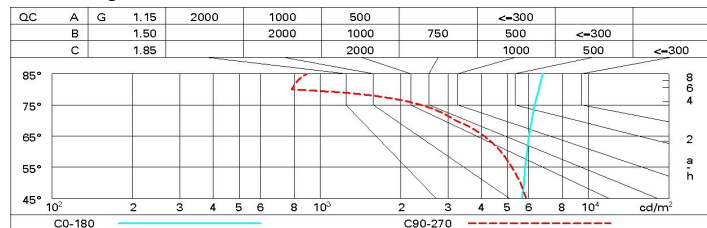

UGR-Diagramm

Corrected UGR values (at 1900 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	work pl.	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Room dim		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
X	Y										
2H	2H	17.6	18.5	18.3	19.3	20.2	14.3	15.2	15.0	16.0	16.9
	3H	20.2	21.1	21.0	21.8	22.8	15.3	16.2	16.1	17.0	17.9
	4H	21.6	22.4	22.3	23.2	24.1	15.9	16.7	16.6	17.5	18.4
	6H	22.9	23.7	23.7	24.5	25.5	16.3	17.1	17.1	17.9	18.9
	8H	23.5	24.3	24.3	25.1	26.1	16.5	17.2	17.3	18.0	19.0
4H	12H	24.2	24.9	25.0	25.7	26.7	16.6	17.3	17.4	18.1	19.1
	2H	18.1	19.0	18.9	19.7	20.7	15.8	16.7	16.6	17.5	18.4
	3H	21.0	21.7	21.8	22.6	23.6	17.2	17.9	18.0	18.7	19.7
	4H	22.5	23.2	23.4	24.0	25.1	18.0	18.7	18.8	19.5	20.5
	6H	24.1	24.7	24.9	25.5	26.6	18.9	19.5	19.8	20.4	21.4
6H	8H	24.8	25.4	25.7	26.2	27.3	19.3	19.9	20.2	20.7	21.8
	12H	25.6	26.1	26.4	27.0	28.0	19.7	20.2	20.5	21.1	22.1
8H	4H	22.9	23.4	23.7	24.3	25.3	18.5	19.0	19.3	19.9	21.0
	6H	24.7	25.1	25.5	26.0	27.1	19.8	20.2	20.6	21.1	22.2
	8H	25.6	26.0	26.5	26.9	28.0	20.5	20.9	21.4	21.8	22.9
	12H	26.5	26.9	27.4	27.8	28.9	21.3	21.6	22.1	22.5	23.6
12H	4H	22.9	23.4	23.7	24.2	25.3	18.6	19.1	19.4	19.9	21.0
	6H	24.8	25.2	25.6	26.1	27.2	19.9	20.3	20.7	21.2	22.3
	8H	25.8	26.1	26.7	27.0	28.2	20.7	21.1	21.6	22.0	23.1
Variations with the observer position at spacing:											
S =		1.0H	0.1 / -0.1				0.1 / -0.0				
		1.5H	0.2 / -0.2				0.2 / -0.2				
		2.0H	0.2 / -0.3				0.3 / -0.4				