


Design iGuzzini iGuzzini



Q956: Frame recessed luminaire - 15 cells - General Lighting Pro - DALI

Q956: Frame recessed luminaire - 15 cells - General Lighting Pro - DALI

Rectangular recessed miniaturised luminaire with 15 optical elements for LED sources - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Despite the ultracompact size of the product, the combination of a total white finish and the patented technology of the optic system guarantees an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with DALI dimmable electronic power supply connected to the luminaire.

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 276.

Weight (Kg)
0.75

meaning
wall recessed|ceiling recessed

On power supply; quick-coupling connection

Complies with EN60598-1 and pertinent regulations




Im system:	2277	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W system:	33.8	Lamp code:	LED
Im source:	3300	Number of lamps for optical assembly:	1
W source:	30	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	67.4	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	9 A / 22 µs
Light Output Ratio (L.O.R.) [%]:	69	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 20 luminaires B16A: 33 luminaires C10A: 34 luminaires C16A: 56 luminaires
CRI (minimum):	90	Minimum dimming %:	1
Colour temperature [K]:	4000	Overvoltage protection:	2kV Common mode & 1kV Differential mode
MacAdam Step:	2	Control:	DALI-2

	Imax =2735 cd CIE nL 0.69 88-98-100-100-69 UGR 22.5-22.4 DIN A.61 UTE 0.69A+0.00T F*1=877 F*1+F*2=981 F*1+F*2+F*3=997	Lux
	h d Em Emax	h d Em Emax
	2 2 507 684	2 2 507 684
	4 4.1 127 171	4 4.1 127 171
	6 6.1 56 76	6 6.1 56 76
8 8.2 32 43	8 8.2 32 43	

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	58	54	51	49	54	51	51	48	69
1.0	62	58	55	53	57	55	54	52	75
1.5	66	63	61	59	62	60	60	57	83
2.0	69	66	65	63	65	64	63	61	88
2.5	70	68	67	66	67	66	65	63	92
3.0	71	70	69	68	69	68	67	65	94
4.0	72	71	70	70	70	69	68	66	96
5.0	73	72	71	71	71	70	69	67	97

Luminance curve limit

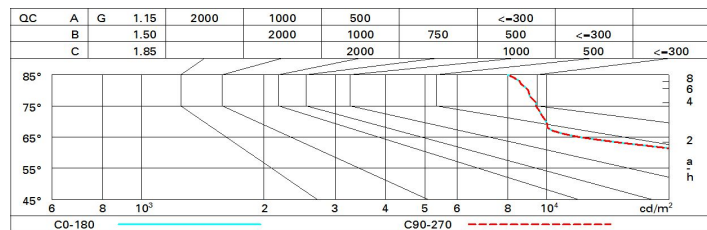

UGR diagram

Corrected UGR values (at 3300 lm bare lamp luminous flux)											
Reflect.:											
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	22.6	23.2	22.8	23.4	23.7	22.6	23.2	22.8	23.4	23.7
	3H	22.5	23.1	22.8	23.4	23.7	22.6	23.1	22.9	23.4	23.7
	4H	22.5	23.1	22.9	23.3	23.6	22.5	23.1	22.8	23.3	23.6
	6H	22.5	23.0	22.9	23.3	23.6	22.4	22.9	22.8	23.3	23.6
	8H	22.5	23.0	22.9	23.3	23.6	22.4	22.9	22.8	23.2	23.6
	12H	22.5	22.9	22.8	23.3	23.6	22.4	22.8	22.8	23.2	23.5
4H	2H	22.5	23.1	22.8	23.3	23.6	22.5	23.1	22.9	23.3	23.6
	3H	22.5	23.0	22.9	23.3	23.7	22.6	23.0	22.9	23.3	23.7
	4H	22.5	22.9	22.9	23.3	23.7	22.5	22.9	22.9	23.3	23.7
	6H	22.5	22.9	23.0	23.3	23.7	22.5	22.8	22.9	23.2	23.6
	8H	22.5	22.8	23.0	23.3	23.7	22.4	22.8	22.9	23.2	23.6
	12H	22.5	22.8	23.0	23.2	23.7	22.4	22.7	22.9	23.1	23.6
8H	4H	22.4	22.8	22.9	23.2	23.6	22.5	22.8	23.0	23.3	23.7
	6H	22.5	22.7	22.9	23.2	23.7	22.5	22.8	23.0	23.2	23.7
	8H	22.5	22.7	23.0	23.2	23.7	22.5	22.7	23.0	23.2	23.7
	12H	22.5	22.7	23.0	23.2	23.7	22.5	22.7	23.0	23.2	23.7
12H	4H	22.4	22.7	22.9	23.1	23.6	22.5	22.8	23.0	23.2	23.7
	6H	22.4	22.7	22.9	23.1	23.6	22.5	22.7	23.0	23.2	23.7
	8H	22.5	22.7	23.0	23.2	23.7	22.5	22.7	23.0	23.2	23.7
Variations with the observer position at spacing:											
S =	1.0H	2.4 / -2.2					2.4 / -2.2				
	1.5H	4.5 / -4.7					4.5 / -4.7				
	2.0H	6.3 / -6.0					6.3 / -6.0				