



Product configuration: Q933
Q933: Recessed luminaire - 5 cells - General Lighting Pro



Q933: Recessed luminaire - 5 cells - General Lighting Pro **Attention! Code no longer in production**

Rectangular recessed luminaire with 5 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. The total white finish and the patented technology of the optic system guarantee an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with electronic control gear connected to the luminaire.

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141.

Weight (Kg)
0.3

wall recessed ceiling recessed

On control gear box including a terminal block with quick-coupling screws.

Complies with EN60598-1 and pertinent regulations




lm system:	825	CRI (typical):	92
W system:	12.7	Colour temperature [K]:	3000
lm source:	1100	MacAdam Step:	3
W source:	9.9	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	65	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	75	Number of optical assemblies:	1
CRI (minimum):	90		

	Imax =1176 cd CIE nL 0.75 88-98-100-100-75 UGR 19.1-19.0 DIN A.61 UTE 0.75A+0.00T F*1=881 F*1+F*2=980 F*1+F*2+F*3=996	Lux		
		h d Em Emax		
	1	0.9	911	1176
	2	1.8	228	294
	3	2.7	101	131
4	3.6	57	73	

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	64	59	56	54	58	56	55	52	70
1.0	67	63	60	58	62	60	59	56	75
1.5	72	69	66	64	68	66	65	62	83
2.0	75	72	70	69	71	70	69	66	88
2.5	76	74	73	72	73	72	71	69	92
3.0	77	76	75	74	75	74	73	71	94
4.0	79	77	77	76	76	75	74	72	96
5.0	79	78	78	77	77	76	75	73	97

Luminance curve limit

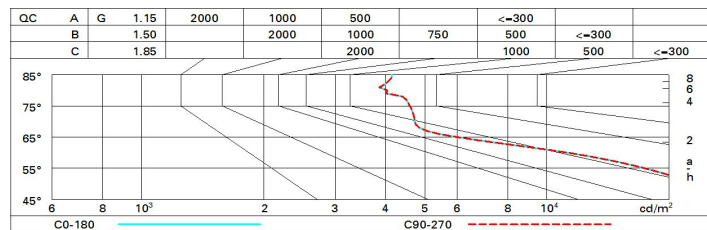

UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	18.9	19.6	19.2	19.8	20.1	18.9	19.6	19.2	19.8	20.1
	3H	18.9	19.5	19.3	19.8	20.1	19.0	19.6	19.3	19.8	20.1
	4H	19.0	19.5	19.3	19.8	20.1	18.9	19.5	19.3	19.8	20.1
	6H	18.9	19.5	19.3	19.8	20.1	18.9	19.4	19.2	19.7	20.0
	8H	18.9	19.5	19.3	19.8	20.1	18.8	19.3	19.2	19.7	20.0
	12H	18.9	19.4	19.3	19.8	20.1	18.8	19.3	19.2	19.6	20.0
4H	2H	18.9	19.5	19.3	19.8	20.1	19.0	19.5	19.3	19.8	20.1
	3H	19.0	19.5	19.4	19.8	20.2	19.0	19.5	19.4	19.9	20.2
	4H	19.0	19.5	19.4	19.8	20.2	19.0	19.5	19.4	19.8	20.2
	6H	19.1	19.4	19.5	19.8	20.3	19.0	19.4	19.4	19.8	20.2
	8H	19.1	19.4	19.5	19.8	20.3	19.0	19.3	19.4	19.7	20.2
	12H	19.1	19.4	19.5	19.8	20.3	18.9	19.2	19.4	19.7	20.1
8H	4H	19.0	19.3	19.4	19.7	20.2	19.1	19.4	19.5	19.8	20.3
	6H	19.1	19.3	19.5	19.8	20.3	19.1	19.4	19.6	19.8	20.3
	8H	19.1	19.3	19.6	19.8	20.3	19.1	19.3	19.6	19.8	20.3
	12H	19.1	19.3	19.6	19.8	20.3	19.1	19.3	19.6	19.8	20.3
12H	4H	18.9	19.2	19.4	19.7	20.1	19.1	19.4	19.5	19.8	20.3
	6H	19.0	19.3	19.5	19.7	20.2	19.1	19.3	19.6	19.8	20.3
	8H	19.1	19.3	19.6	19.8	20.3	19.1	19.3	19.6	19.8	20.3
Variations with the observer position at spacing:											
S =	1.0H	1.4 / -1.5					1.4 / -1.5				
	1.5H	3.1 / -3.7					3.1 / -3.7				
	2.0H	4.8 / -4.9					4.8 / -4.9				