



Polardiagramm

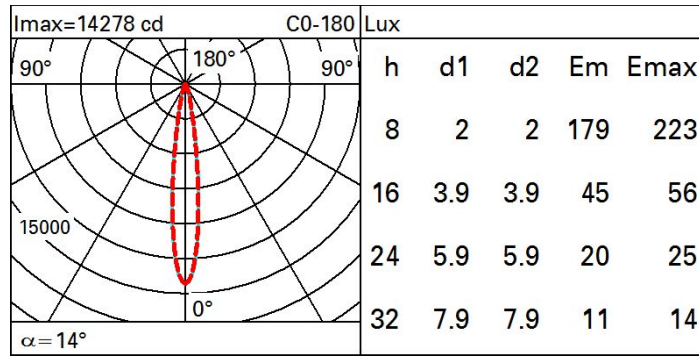

Isolux

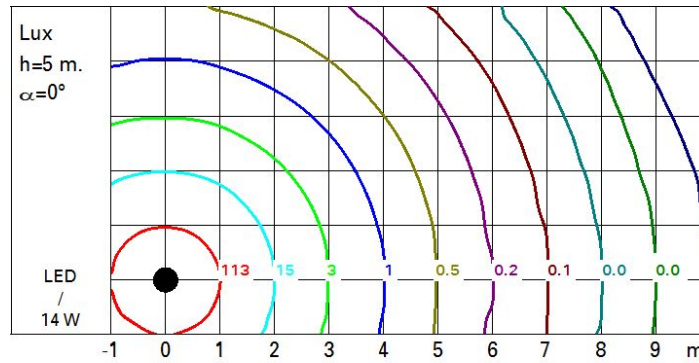

UGR-Diagramm

Corrected UGR values (at 1810 lm bare lamp luminous flux)										
Reflect.:		viewed crosswise					viewed endwise			
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim										
x	y									
2H	2H	5.3	7.3	5.6	7.6	7.9	5.3	7.3	5.7	7.6
	3H	5.2	6.5	5.6	6.9	7.2	5.3	6.6	5.6	6.9
	4H	5.2	6.2	5.5	6.5	6.9	5.2	6.3	5.6	6.6
	6H	5.1	5.9	5.5	6.2	6.6	5.2	6.0	5.6	6.3
	8H	5.1	5.9	5.4	6.2	6.6	5.1	6.0	5.5	6.3
	12H	5.0	5.9	5.4	6.3	6.6	5.0	6.0	5.4	6.3
4H	2H	5.2	6.2	5.5	6.5	6.9	5.2	6.2	5.5	6.6
	3H	5.0	6.0	5.4	6.3	6.7	5.1	6.0	5.5	6.3
	4H	4.9	6.0	5.3	6.4	6.8	4.9	6.0	5.3	6.4
	6H	4.5	6.2	5.0	6.7	7.2	4.6	6.3	5.0	6.7
	8H	4.4	6.3	4.9	6.7	7.2	4.4	6.3	4.9	6.8
	12H	4.3	6.2	4.8	6.7	7.2	4.4	6.2	4.9	6.7
8H	4H	4.4	6.3	4.9	6.7	7.2	4.4	6.3	4.9	6.8
	6H	4.4	6.0	4.9	6.5	7.0	4.4	6.0	4.9	6.5
	8H	4.4	5.7	4.9	6.2	6.7	4.4	5.7	4.9	6.2
	12H	4.5	5.3	5.0	5.8	6.4	4.5	5.4	5.0	5.9
12H	4H	4.3	6.2	4.8	6.7	7.2	4.4	6.2	4.9	6.7
	6H	4.4	5.7	4.9	6.2	6.7	4.4	5.7	4.9	6.2
	8H	4.5	5.3	5.0	5.8	6.4	4.5	5.4	5.0	5.9
Variations with the observer position at spacing:										
S =		2.5 / -4.9					2.4 / -5.0			
		4.9 / -9.3					4.8 / -10.3			
		6.9 / -12.2					6.8 / -13.7			