


Last information update: February 2025

**Product configuration: QI24**

QI24: 600x600 mm panel - warm white - opal screen - DALI

**Product code**

QI24: 600x600 mm panel - warm white - opal screen - DALI

**Technical description**

600x600 mm luminaire for surface-mounting on modular panels in a 3000K warm white colour. The optical assembly consists of a white steel sheet frame, a satin finish methacrylate diffuser screen for general light emission and a sheet metal rear closing base. The LEDs are arranged around the perimeter and the DALI driver is housed in the upper part of the product. The product can be recessed or pendant-mounted using an accessory to be ordered separately. Ceiling-mounted versions only on request.

**Installation**

Surface-mounted on 600x600 mm modular panels. Recessed installation via an accessory to be ordered separately, pendant installation via an accessory to be ordered separately.

**Colour**

White (01)

**Weight (Kg)**

4.1

**Mounting**

ceiling recessed|ceiling surface|ceiling pendant

**Wiring**

product complete with electronic components


Complies with EN60598-1 and pertinent regulations



IP20

IP40

On the visible part of the product once installed

**Technical data**

lm system: 3100

W system: 33.2

lm source: -

W source: -

Luminous efficiency (lm/W, real value): 93.4

lm in emergency mode: -

Total light flux at or above an angle of 90° [Lm]: 0

Light Output Ratio (L.O.R.) [%]: 100

CRI (minimum): 90

Colour temperature [K]: 3000

Life Time LED 1: &gt; 50,000h - L80 - B10 (Ta 25°C)


Lamp code: LED

Number of lamps for optical assembly: 1

ZVEI Code: LED

Number of optical assemblies: 1


Control: DALI-2

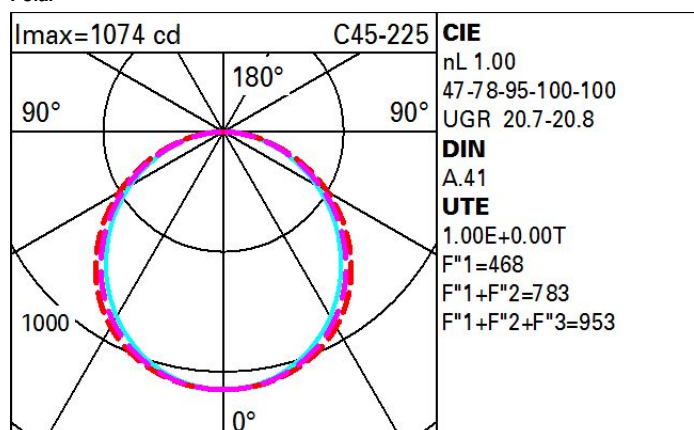**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	65	55	47	41	53	46	46	39	39
1.0	72	62	55	49	60	54	53	46	46
1.5	82	74	68	62	72	67	65	59	59
2.0	89	82	76	72	80	75	74	68	68
2.5	92	87	82	78	85	80	79	73	73
3.0	95	90	86	82	88	84	83	78	78
4.0	98	94	91	88	92	89	88	83	83
5.0	100	97	94	91	95	92	90	86	86

# Luminance curve limit

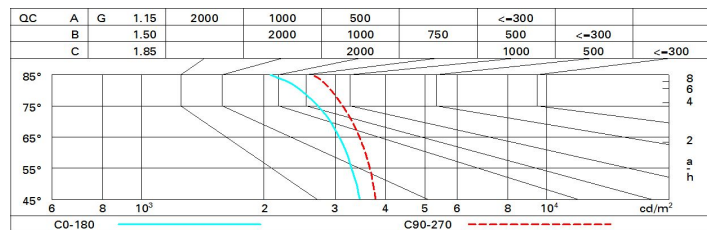

# UGR diagram

Corrected UGR values (at 3100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	16.8	18.0	17.1	18.3	18.5	17.3	18.5	17.6	18.8	19.1
	3H	18.3	19.4	18.7	19.7	20.0	17.7	18.9	18.1	19.2	19.5
	4H	18.9	20.0	19.3	20.3	20.6	17.9	19.0	18.3	19.3	19.6
	6H	19.4	20.3	19.8	20.7	21.0	18.0	18.9	18.4	19.3	19.6
	8H	19.5	20.5	19.9	20.8	21.2	18.0	18.9	18.4	19.3	19.6
	12H	19.6	20.5	20.0	20.9	21.3	18.0	18.9	18.4	19.2	19.6
4H	2H	17.5	18.6	17.9	18.9	19.2	19.6	20.6	19.9	20.9	21.3
	3H	19.2	20.1	19.6	20.5	20.9	20.2	21.1	20.6	21.5	21.9
	4H	20.0	20.8	20.4	21.1	21.5	20.5	21.3	20.9	21.7	22.1
	6H	20.5	21.2	21.0	21.6	22.1	20.7	21.4	21.2	21.9	22.3
	8H	20.7	21.4	21.2	21.8	22.3	20.8	21.4	21.3	21.9	22.3
	12H	20.9	21.4	21.3	21.9	22.4	20.8	21.4	21.3	21.8	22.3
8H	4H	20.3	20.9	20.7	21.4	21.8	21.4	22.1	21.9	22.5	22.9
	6H	21.0	21.6	21.5	22.0	22.5	21.8	22.3	22.3	22.8	23.3
	8H	21.3	21.8	21.8	22.2	22.7	21.9	22.4	22.4	22.9	23.4
	12H	21.5	21.9	22.0	22.4	22.9	22.0	22.4	22.5	22.9	23.4
12H	4H	20.3	20.9	20.8	21.3	21.8	21.6	22.2	22.1	22.6	23.1
	6H	21.1	21.6	21.6	22.0	22.5	22.0	22.5	22.5	22.9	23.5
	8H	21.4	21.8	21.9	22.3	22.8	22.2	22.6	22.7	23.1	23.6
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.1					0.1 / -0.1				
	1.5H	0.3 / -0.4					0.2 / -0.3				
	2.0H	0.4 / -0.5					0.4 / -0.5				