

Laser Pinhole


Design iGuzzini

iGuzzini

Last information update: October 2024

Product configuration: P422

P422: fixed recessed WW

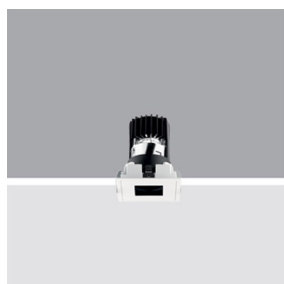

Product code

P422: fixed recessed WW

Technical description

Square fixed luminaire designed for housing 2700K Warm White COB LED light sources with high colour rendering and OPTIBEAM reflector made of thermoplastic material. Rim made of white-coated die-cast aluminium incorporating a black-coated thermoplastic component for guaranteeing maximum visual comfort and preventing stray light dispersion. Flood optic. Passive cooling system, by means of a black-coated heat sink made of extruded aluminium. The power supply unit is available with a separate code.

Installation

Recessed installation in false ceilings with 1 mm to 20 mm thickness with steel springs.

Colour

White (01)


Mounting

ceiling surface

Wiring

Constant-current ballasts available with separate code: ON-OFF / 1-10 V dimmable / phase-cut dimmer / the recessed luminaire is supplied with the cable and connector to be connected to the connector provided on the driver.

Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	562	CRI (minimum):	90
W system:	10	Colour temperature [K]:	2700
Im source:	1150	MacAdam Step:	2
W source:	10	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	56.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	49	Number of optical assemblies:	1
Beam angle [°]:	28°	LED current [mA]:	300


Polar

<p>$\alpha = 28^\circ$</p>	CIE			
	nL 0.49			
	99-100-100-100-49			
	UGR <10-10			
	DIN			
	A.61			
	UTE			
	0.49A+0.00T			
	F*1=992			
	F*1+F*2=998			
F*1+F*2+F*3=1000				
	CIBSE			
	LG3 L<1500 cd/m ² at 65°			
	UGR<10 L<1500 cd/mq @65°			
Lux				
h	d	Em	Emax	
2	1	493	627	
4	2	123	157	
6	3	55	70	
8	4	31	39	

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	44	42	40	39	41	40	40	38	78
1.0	46	44	42	41	43	42	42	40	82
1.5	48	47	45	44	46	45	45	43	88
2.0	50	49	48	47	48	47	47	45	93
2.5	51	50	49	49	49	48	48	47	96
3.0	51	51	50	50	50	49	49	48	98
4.0	52	51	51	51	51	50	50	48	99
5.0	52	52	52	51	51	51	50	49	100

Luminance curve limit

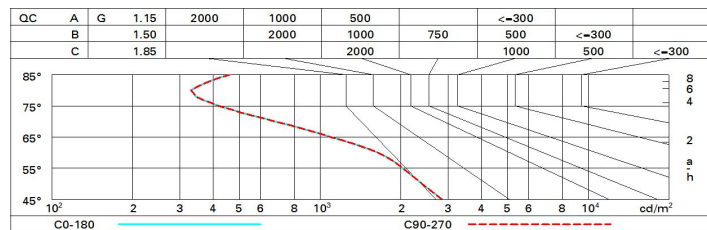

UGR diagram

Corrected UGR values (at 1150 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	1.4	3.5	1.8	3.9	4.2	1.4	3.5	1.8	3.9	4.2
	3H	1.6	3.3	2.0	3.6	3.9	1.5	3.2	1.9	3.5	3.9
	4H	1.6	3.0	2.0	3.3	3.6	1.6	2.9	1.9	3.3	3.6
	6H	1.6	2.6	2.0	3.0	3.3	1.6	2.5	1.9	2.9	3.2
	8H	1.6	2.6	2.0	2.9	3.3	1.5	2.5	1.9	2.8	3.2
	12H	1.6	2.5	2.0	2.9	3.3	1.5	2.4	1.9	2.8	3.2
4H	2H	1.6	2.9	1.9	3.3	3.6	1.6	3.0	2.0	3.3	3.6
	3H	1.9	2.8	2.3	3.2	3.6	1.9	2.8	2.3	3.2	3.5
	4H	1.9	2.8	2.3	3.1	3.5	1.9	2.8	2.3	3.1	3.5
	6H	1.5	3.2	2.0	3.7	4.1	1.5	3.2	2.0	3.6	4.1
	8H	1.4	3.3	1.9	3.8	4.3	1.4	3.3	1.9	3.8	4.3
	12H	1.3	3.3	1.9	3.8	4.3	1.3	3.3	1.8	3.7	4.3
8H	4H	1.4	3.3	1.9	3.8	4.3	1.4	3.3	1.9	3.8	4.3
	6H	1.3	3.2	1.9	3.7	4.2	1.4	3.2	1.9	3.7	4.2
	8H	1.4	3.0	1.9	3.5	4.0	1.4	3.0	1.9	3.5	4.0
	12H	1.6	2.7	2.1	3.2	3.7	1.5	2.7	2.0	3.2	3.7
12H	4H	1.3	3.3	1.8	3.7	4.3	1.3	3.3	1.9	3.8	4.3
	6H	1.3	3.0	1.9	3.5	4.0	1.4	3.0	1.9	3.5	4.1
	8H	1.5	2.7	2.0	3.2	3.7	1.6	2.7	2.1	3.2	3.7
Variations with the observer position at spacing:											
S =	1.0H	1.5 / -1.0					1.5 / -1.0				
	1.5H	3.0 / -2.4					3.0 / -2.4				
	2.0H	4.6 / -4.1					4.6 / -4.1				