

Laser Blade XS

iGuzzini

iGuzzini

Last information update: June 2025

Product configuration: Q955
Q955: Frame recessed luminaire - 10 cells - General Lighting Pro - DALI

Q955: Frame recessed luminaire - 10 cells - General Lighting Pro - DALI

Q955: Frame recessed luminaire - 10 cells - General Lighting Pro - DALI

Rectangular recessed miniaturised luminaire with 10 optical elements for LED sources - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Despite the ultracompact size of the product, the combination of a total white finish and the patented technology of the optic system guarantees an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with DALI dimmable electronic power supply connected to the luminaire.


Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 186.

Weight (Kg)
0.55

mounting
wall recessed/ceiling recessed

On power supply; quick-coupling connection

Complies with EN60598-1 and pertinent regulations

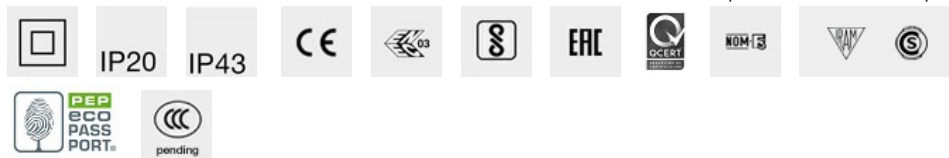


Im system:	1208	Colour temperature [K]:	2700
W system:	23.1	MacAdam Step:	2
Im source:	1750	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	20	Lamp code:	LED
Luminous efficiency (lm/W, real value):	52.3	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	69	Control:	DALI-2
CRI (minimum):	90		

	CIE nL 0.69 88-98-100-100-69 UGR 21.7-21.6	Lux			
	DIN A.61	h	d	Em	E _{max}
	UTE 0.69A+0.00T F*1=877 F*1+F*2=981 F*1+F*2+F*3=997	1	1	1075	1450
		2	2	269	363
		3	3.1	119	161
$\alpha = 54^\circ$		4	4.1	67	91

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	58	54	51	49	54	51	51	48	69
1.0	62	58	55	53	57	55	54	52	75
1.5	66	63	61	59	62	60	60	57	83
2.0	69	66	65	63	65	64	63	61	88
2.5	70	68	67	66	67	66	65	63	92
3.0	71	70	69	68	69	68	67	65	94
4.0	72	71	70	70	70	69	68	66	96
5.0	73	72	71	71	71	70	69	67	97

Luminance curve limit

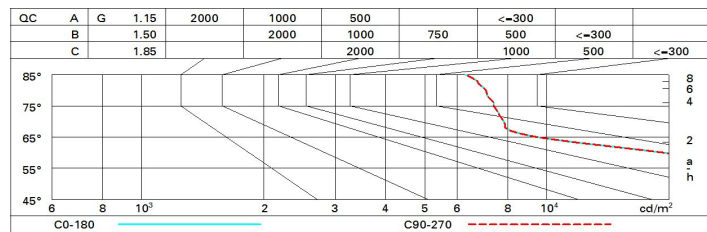

UGR diagram

Corrected UGR values (at 1750 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	21.7	22.4	22.0	22.6	22.8	21.7	22.4	22.0	22.6	22.8
	3H	21.7	22.3	22.0	22.5	22.8	21.7	22.3	22.0	22.6	22.9
	4H	21.7	22.2	22.0	22.5	22.8	21.7	22.2	22.0	22.5	22.8
	6H	21.7	22.2	22.0	22.5	22.8	21.6	22.1	22.0	22.4	22.7
	8H	21.7	22.1	22.0	22.5	22.8	21.6	22.1	21.9	22.4	22.7
	12H	21.6	22.1	22.0	22.4	22.8	21.5	22.0	21.9	22.3	22.7
4H	2H	21.7	22.2	22.0	22.5	22.8	21.7	22.2	22.0	22.5	22.8
	3H	21.7	22.1	22.1	22.5	22.8	21.7	22.2	22.1	22.5	22.9
	4H	21.7	22.1	22.1	22.5	22.8	21.7	22.1	22.1	22.5	22.8
	6H	21.7	22.0	22.1	22.4	22.9	21.6	22.0	22.1	22.4	22.8
	8H	21.7	22.0	22.1	22.4	22.9	21.6	21.9	22.0	22.3	22.8
	12H	21.7	22.0	22.1	22.4	22.9	21.6	21.9	22.0	22.3	22.7
8H	4H	21.6	21.9	22.0	22.3	22.8	21.7	22.0	22.1	22.4	22.9
	6H	21.6	21.9	22.1	22.4	22.8	21.7	21.9	22.1	22.4	22.9
	8H	21.7	21.9	22.1	22.4	22.9	21.7	21.9	22.1	22.4	22.9
	12H	21.7	21.9	22.2	22.3	22.9	21.6	21.8	22.1	22.3	22.8
12H	4H	21.6	21.9	22.0	22.3	22.7	21.7	22.0	22.1	22.4	22.9
	6H	21.6	21.8	22.1	22.3	22.8	21.7	21.9	22.1	22.4	22.9
	8H	21.6	21.8	22.1	22.3	22.8	21.7	21.9	22.2	22.3	22.9
Variations with the observer position at spacing:											
S =		1.0H					2.4 / -2.2				
		1.5H					4.5 / -4.7				
		2.0H					6.3 / -6.0				