




E894: Wall-mounted system with street optic.



Im system:	2320	MacAdam Step:	5
W system:	31.3	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Im source:	-	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W source:	-	Lamp code:	LED
Luminous efficiency (Im/W, real value):	74.1	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	19	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	100	Intervallo temperatura ambiente:	from -20°C to +35°C. (*)
CRI (minimum):	70	Control:	Middle of the night
Colour temperature [K]:	3000		

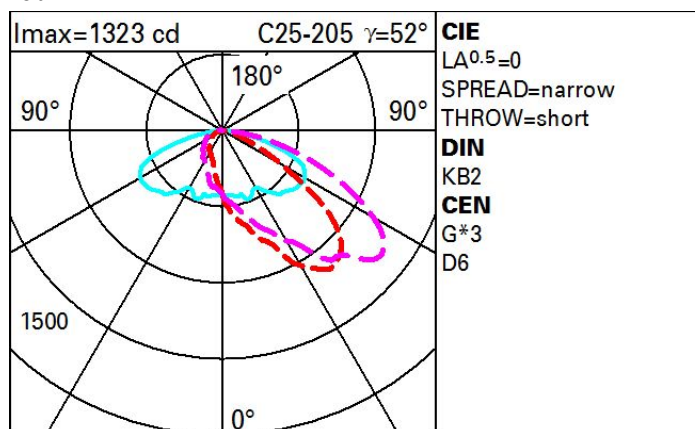

Isolux

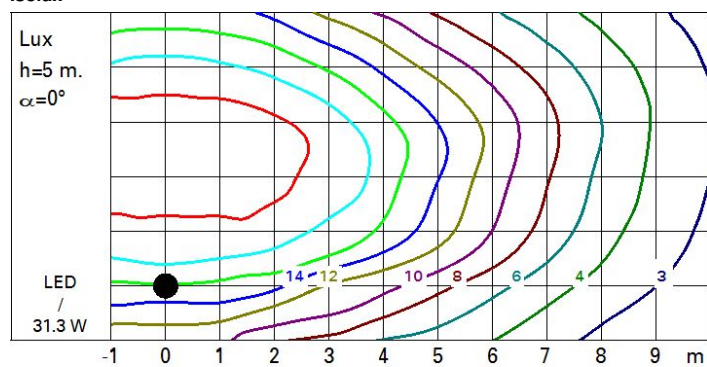

Utilisation factors

