

Underscore X26


Design iGuzzini

iGuzzini

Last information update: June 2024

Product configuration: M889

M889: X26 recessed 1000 High Flux



Product code

M889: X26 recessed 1000 High Flux **Attention! Code no longer in production**

Technical description

Rigid-profile product for linear LED lighting, designed to be recessed. Extruded aluminium bar structure with contact frame. Diffusing opal polycarbonate linear screen. Moulded polycarbonate sides and end closing caps. The product has contact springs for recessed application in blind holes (shelves). Use the accessory springs for insertion in supports with through holes. Version with 12 LED 24Vdc high emission module (total 12W) - white colour, warm white tone (3100K) colour rendering index - CRI 95 (recommended for use in museums). Ballast not included

Installation

Pressed into blind hole previously prepared, using contact springs supplied with the luminaire. For applications with through holes, remove the contact springs and use the accessory kit (MWK3) for standard recessed fixing (1 to 30 mm false ceilings)

Colour

Clear transparent (24) | Aluminium (12)

Mounting

wall surface|ceiling surface

Wiring

Constant voltage ballasts to be ordered separately: electronic 50W 24V (MWK4) - electronic 70W 24V dimmable 1-10V (MWK5). Power supply end cap with cable (MWK1 - for connection to the ballast); intermediate power supply cap with cable (MWK2 - for connection between modules)

Notes

For fixing, connections and power supply, use the components available with a separate code.

Complies with EN60598-1 and pertinent regulations




IP40



Technical data

Im system:	421.6	CRI:	95
W system:	14.3	Colour temperature [K]:	3000
Im source:	840	Life Time LED 1:	50,000h - L70 - B20 (Ta 25°C)
W source:	13	Lamp code:	LED
Luminous efficiency (Im/W, real value):	29.5	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	50		


Polar

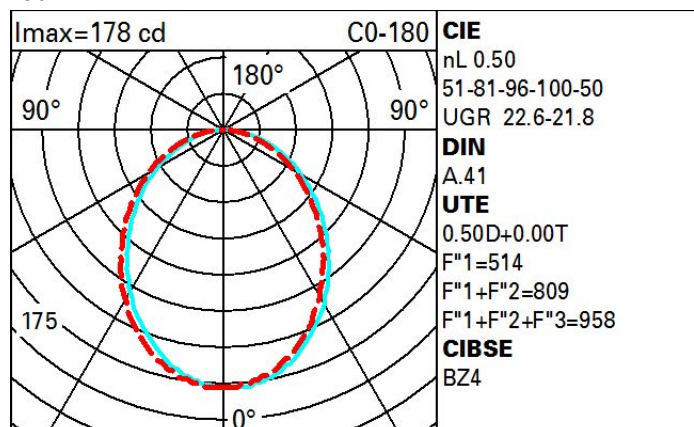

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	34	29	25	22	28	25	24	21	42
1.0	37	32	29	26	32	28	28	25	49
1.5	42	38	35	33	37	35	34	31	62
2.0	45	42	39	37	41	39	38	35	70
2.5	47	44	42	40	43	41	41	38	76
3.0	48	46	44	42	45	43	42	40	79
4.0	50	48	46	45	47	45	45	42	84
5.0	50	49	48	46	48	47	46	44	87

Luminance curve limit

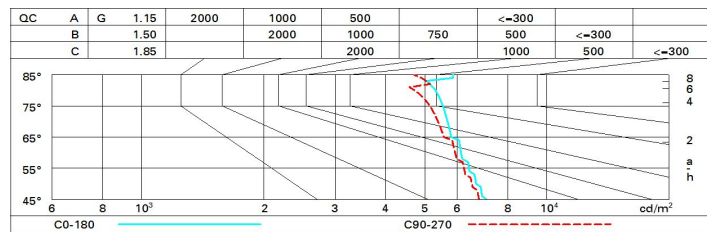

UGR diagram

Corrected UGR values (at 805 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	18.7	19.8	19.0	20.1	20.4	18.5	19.7	18.9	20.0	20.2
	3H	20.2	21.2	20.5	21.5	21.8	19.0	20.1	19.4	20.4	20.7
	4H	20.8	21.8	21.2	22.1	22.5	19.2	20.2	19.6	20.5	20.8
	6H	21.4	22.3	21.8	22.6	23.0	19.3	20.2	19.7	20.5	20.9
	8H	21.6	22.5	22.0	22.8	23.2	19.3	20.2	19.7	20.5	20.9
	12H	21.8	22.6	22.2	23.0	23.3	19.3	20.1	19.7	20.5	20.9
4H	2H	19.3	20.3	19.6	20.6	20.9	20.5	21.5	20.8	21.8	22.1
	3H	21.0	21.8	21.4	22.2	22.5	21.2	22.0	21.6	22.4	22.7
	4H	21.7	22.5	22.1	22.9	23.3	21.5	22.2	21.9	22.6	23.0
	6H	22.4	23.0	22.8	23.4	23.9	21.7	22.4	22.2	22.8	23.2
	8H	22.6	23.2	23.1	23.7	24.1	21.8	22.4	22.2	22.8	23.3
	12H	22.9	23.4	23.3	23.8	24.3	21.8	22.4	22.3	22.8	23.3
8H	4H	22.0	22.6	22.4	23.0	23.5	22.2	22.8	22.7	23.2	23.7
	6H	22.8	23.3	23.3	23.7	24.2	22.6	23.1	23.1	23.6	24.0
	8H	23.1	23.5	23.6	24.0	24.5	22.8	23.2	23.3	23.7	24.2
	12H	23.4	23.8	23.9	24.3	24.8	22.9	23.3	23.4	23.8	24.3
12H	4H	22.0	22.6	22.5	23.0	23.5	22.3	22.9	22.8	23.3	23.8
	6H	22.8	23.3	23.3	23.7	24.2	22.8	23.2	23.3	23.7	24.2
	8H	23.2	23.6	23.7	24.1	24.6	23.0	23.4	23.5	23.8	24.4
Variations with the observer position at spacing:											
S =		1.0H					0.1 / -0.1				
		1.5H					0.2 / -0.3				
		2.0H					0.5 / -0.6				