
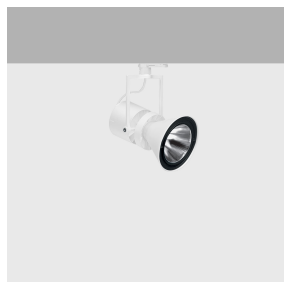


Last information update: May 2024

**Product configuration: MR24**

MR24: Medium body spotlight - warm white - electronic ballast and dimmer - wide flood optic

**Product code**MR24: Medium body spotlight - warm white - electronic ballast and dimmer - wide flood optic **Attention! Code no longer in production****Technical description**

Adjustable spotlight with adapter for installation on mains electrified track for high output LED lamp with monochrome emission in a warm white (3000K) colour. Dimmable electronic ballast. The luminaire is made of die-cast aluminium and thermoplastic material, and allows 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. The luminaire has mechanical aiming locks and graduated scales for both movements, operated using the same tool on two screws, one on the optic compartment and one on the adapter for the track. Spotlight equipped with accessory holding ring designed to contain a flat accessory. Another external component can also be applied, selected from directional flaps and an asymmetric screen. All external accessories rotate 360° about the spotlight longitudinal axis.

**Installation**

On an electrified track

**Colour**

White (01) | Grey / Black (74)


**Mounting**

three circuit track

**Wiring**

The dimmable electronic components are housed in the luminaire.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	2188	CRI (minimum):	80
W system:	24	Colour temperature [K]:	3000
Im source:	3000	MacAdam Step:	3
W source:	21	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	91.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	73	Number of optical assemblies:	1
Beam angle [°]:	48°		


**Polar**

<p>Imax=3641 cd 90° 180° 90° 4000 0° α=48°</p>	<b>CIE</b> nL 0.73 99-100-100-100-73 UGR 14.0-14.0 <b>DIN</b> A.61 <b>UTE</b> 0.73A+0.00T F*1=989 F*1+F*2=998 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m² at 65° UGR<16   L<1500 cd/mq @65°	<b>Lux</b>			
		h	d	Em	E <sub>max</sub>
		2	1.8	715	910
		4	3.6	179	228
		6	5.3	79	101
		8	7.1	45	57

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	62	60	58	62	59	59	57	78
1.0	68	65	63	61	65	63	62	60	82
1.5	72	70	68	66	69	67	66	64	88
2.0	74	73	71	70	71	70	70	68	93
2.5	76	74	73	72	73	72	72	70	95
3.0	77	76	75	74	74	74	73	71	97
4.0	77	77	76	76	76	75	74	72	99
5.0	78	77	77	77	76	76	75	73	100

# Luminance curve limit

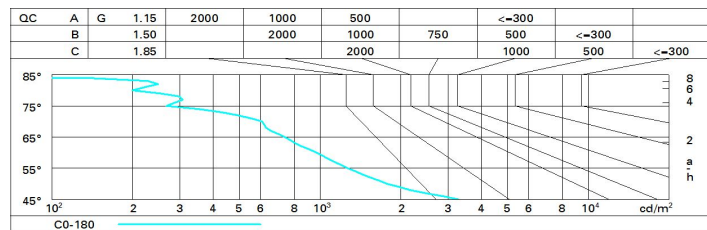

# UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x            y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	14.5	15.1	14.8	15.3	15.5	14.5	15.1	14.8	15.3	15.5
	3H	14.4	14.9	14.7	15.2	15.4	14.4	14.9	14.7	15.2	15.4
	4H	14.3	14.8	14.7	15.1	15.4	14.3	14.8	14.7	15.1	15.4
	6H	14.3	14.7	14.6	15.0	15.3	14.2	14.7	14.6	15.0	15.3
	8H	14.2	14.6	14.6	15.0	15.3	14.2	14.6	14.6	15.0	15.3
	12H	14.2	14.6	14.6	14.9	15.3	14.2	14.6	14.5	14.9	15.3
4H	2H	14.3	14.8	14.7	15.1	15.4	14.3	14.8	14.7	15.1	15.4
	3H	14.2	14.6	14.6	14.9	15.3	14.2	14.6	14.6	14.9	15.3
	4H	14.1	14.4	14.5	14.8	15.2	14.1	14.4	14.5	14.8	15.2
	6H	14.0	14.3	14.4	14.7	15.1	14.0	14.3	14.4	14.7	15.1
	8H	14.0	14.2	14.4	14.7	15.1	14.0	14.2	14.4	14.7	15.1
	12H	13.9	14.2	14.4	14.6	15.1	13.9	14.2	14.4	14.6	15.1
8H	4H	14.0	14.2	14.4	14.7	15.1	14.0	14.2	14.4	14.7	15.1
	6H	13.9	14.1	14.3	14.5	15.0	13.9	14.1	14.3	14.5	15.0
	8H	13.8	14.0	14.3	14.5	15.0	13.8	14.0	14.3	14.5	15.0
	12H	13.8	13.9	14.3	14.4	14.9	13.8	13.9	14.3	14.4	14.9
12H	4H	13.9	14.2	14.4	14.6	15.1	13.9	14.2	14.4	14.6	15.1
	6H	13.8	14.0	14.3	14.5	15.0	13.8	14.0	14.3	14.5	15.0
	8H	13.8	13.9	14.3	14.4	14.9	13.8	13.9	14.3	14.4	14.9
Variations with the observer position at spacing:											
S =	1.0H	6.1 / -14.2					6.1 / -14.2				
	1.5H	8.9 / -15.7					8.9 / -15.7				
	2.0H	10.9 / -16.4					10.9 / -16.4				