


iPro



iGuzzini
NORTH AMERICA

iPro ceiling / wall mounted



		W	lm	Optic	Dimensions
Micro ceiling-mounted		4.7	185 / 200	27° 	A 2" B 2-3/4" C 2" A 51mm B 69mm C 51mm
Mini ceiling-mounted		6.4	230 / 245	34° 	A 3-1/4" B 3-7/8" C 3-1/4" A 81mm B 99mm C 81mm
Small ceiling-mounted		13.6	1240 / 1315	40° 	A 5-1/4" B 6-5/8" C 5-1/4" A 132mm B 168mm C 132mm
Medium		19	1580 / 1650	38° 	A 6-1/8" B 7-7/8" C 6-1/8" A 155mm B 193mm C 155mm
Large		27 / 42	2795 / 2875	32° 	A 7-5/8" B 10-1/8" C 7-5/8" A 192mm B 258mm C 192mm
Micro wall-mounted Up light or Down light		1.5 / 4.5	40 / 65	85° L 	A 2" B 2-7/8" C 2-1/4" A 51mm B 74mm C 56mm
Micro wall-mounted Up / Down light		3 / 4.5 / 6	50 / 155	85° / 85° L / 85° L / L 	A 2" B 2-1/2" C 6-3/8" A 51mm B 63mm C 161mm


Color temperature

3000K CRI 80
4000K CRI 80

Degree of protection

IP66
IK07


Finishes



Class

UL listed

Accessories

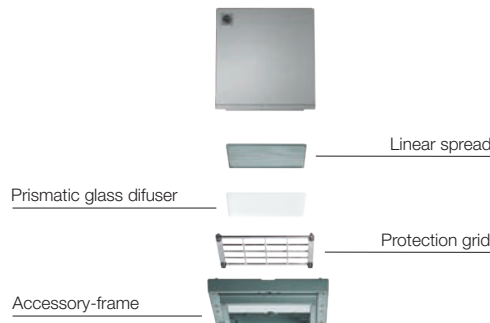

iPro Projector

Micro / Mini / Small



micro \varnothing 2"



mini \varnothing 3-1/4"



small \varnothing 5-1/4"


Medium /Large



medium \varnothing 6-1/8 "



large \varnothing 7-1/2"

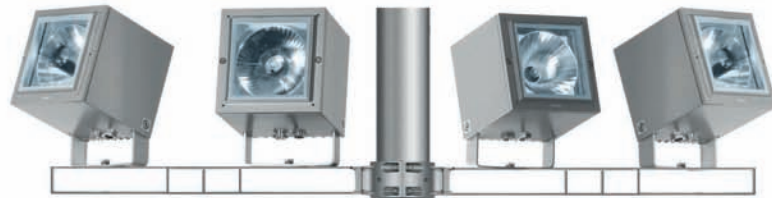

pole with arm



wall support



pole ø 4"

pole with bracket



wall-mounted

The large, medium and small spotlight can be wall-mounted using the appropriate accessories.



iPro Ceiling mounted




iPro Wall mounted



iPro Wall effect





		W	lm	Optic	Dimensions
Micro		1.5 / 4.7	40 / 280	8° 18° 26° 84° 	A 2" B 3-1/8" C 3-1/4" A 51mm B 80mm C 83mm
Mini		6.4	245 / 300	8° 34° 90° 	A 3-1/4" B 4-1/2" C 3-3/8" A 81mm B 114mm C 85mm
Small		14	1090 / 1280	20° 40° 52° 	A 5-1/4" B 6-3/4" C 5-1/2" A 132mm B 171mm C 140mm
Medium		19	1390 / 1780	12° 38° 48° 	A 6-1/8" B 7-3/4" C 6-1/2" A 155mm B 197mm C 165mm
Large		27 / 42	2875 / 4240	16° 32° 48° 	A 7-5/8" B 9-5/8" C 7-7/8" A 192mm B 244mm C 200mm
Small		11	560 / 710	10° 34° 	A 5-1/4" B 6-3/4" C 5-1/2" A 132mm B 171mm C 140mm
Medium		19	950 / 1495	12° 32° 	A 6-1/8" B 7-3/4" C 6-1/2" A 155mm B 197mm C 165mm
Large		30	1615 / 1900	8° 33° 	A 7-5/8" B 9-5/8" C 7-7/8" A 192mm B 244mm C 200mm


Color temperature

3000K CRI 80
4000K CRI 80

Degree of protection

IP66
IK07


Finishes



Class

UL listed

Accessories

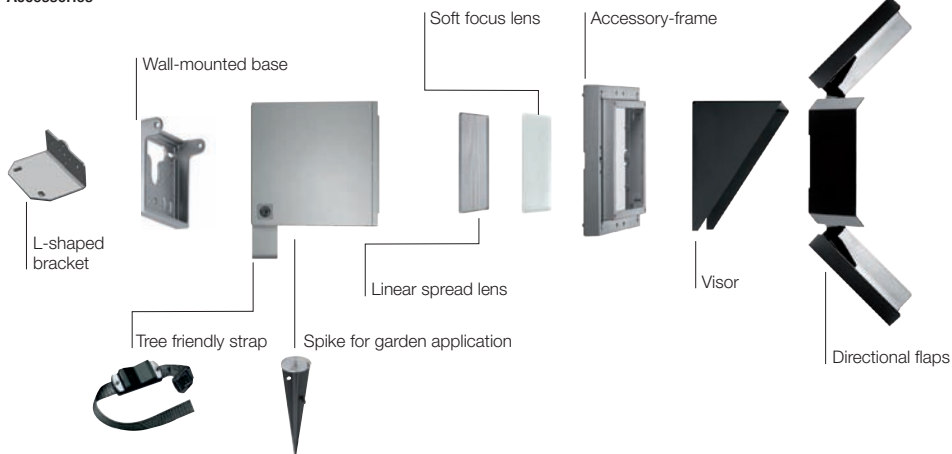

For dimming options, refer to the specification sheet



information@iguzzini-na.com
www.iguzzini-na.com

Montreal

9320 Boul. St-Laurent
Suite 100
Montréal, Québec
Canada H2N 1N7
P: 514 523-1339
F: 514 525-6107

Toronto

383 Adelaide Street West
Toronto, ON
Canada M5V 1S4
P: 416 408-3995
F: 416 408-4269

Vancouver

827 Powell Street
Vancouver, BC
Canada V6A 1H7
P: 604 215-1539
F: 604 215-1548

New York

60 Madison Ave
2nd floor
New York, NY, 10010
P: 212 481-8188
F: 212 481-8189