

Laser Pinhole

Design iGuzzini

iGuzzini

Last information update: April 2025

Product configuration: P443
P443: recessed adjustable



Product code

P443: recessed adjustable

Technical description

Round adjustable luminaire designed for housing 2700K Warm White COB LED light sources with high colour rendering and OPTIBEAM reflector made of thermoplastic material. Rim made of white-coated die-cast aluminium, upper barrel made of black-coated thermoplastic for guaranteeing maximum visual comfort and preventing stray light dispersion, black-coated extruded aluminium heat sink. Medium optic. Adjustable internally around the horizontal axis by 35° and around the vertical axis by 358°. Passive cooling system. Product inclusive of DALI components.

Installation

Recessed installation in false ceilings with 1 mm to 20 mm thickness with steel springs.

Colour
White (01)

Weight (Kg)
1.3


Mounting

ceiling surface

Wiring

Product inclusive of DALI components.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	960	CRI (minimum):	90
W system:	21.8	Colour temperature [K]:	2700
lm source:	2000	MacAdam Step:	2
W source:	19	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	44	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	48	Number of optical assemblies:	1
Beam angle [°]:	12°	Control:	DALI-2

Polar

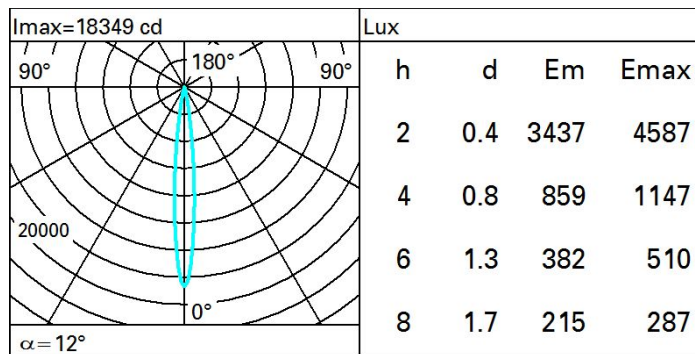

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	43	41	40	38	41	39	39	38	78
1.0	45	43	42	41	43	41	41	40	83
1.5	47	46	45	44	45	44	44	42	88
2.0	49	48	47	46	47	46	46	45	93
2.5	50	49	48	48	48	48	47	46	96
3.0	50	50	49	49	49	49	48	47	98
4.0	51	51	50	50	50	50	49	48	99
5.0	51	51	51	51	50	50	49	48	100

Luminance curve limit

