


Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	64	61	59	63	61	60	58	76
1.0	71	67	65	63	67	64	64	61	81
1.5	75	72	70	68	71	69	69	66	87
2.0	77	75	74	72	74	73	72	70	92
2.5	78	77	76	75	76	75	74	72	95
3.0	79	78	78	77	77	76	75	74	97
4.0	80	80	79	79	78	78	77	75	99
5.0	81	80	80	80	79	79	77	76	100

Luminance curve limit

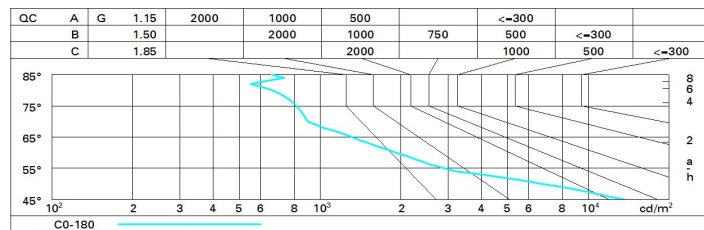

UGR diagram

Corrected UGR values (at 1930 lm bare lamp luminous flux)											
Reflect.:											
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed					viewed				
x	y	crosswise					endwise				
2H	2H	18.0	18.6	18.2	18.9	19.1	18.0	18.6	18.2	18.9	19.1
	3H	17.8	18.4	18.1	18.7	19.0	17.8	18.4	18.1	18.7	19.0
	4H	17.8	18.3	18.1	18.6	18.9	17.8	18.3	18.1	18.6	18.9
	6H	17.7	18.2	18.0	18.5	18.8	17.7	18.2	18.0	18.5	18.8
	8H	17.7	18.1	18.0	18.5	18.8	17.6	18.1	18.0	18.5	18.8
12H	17.6	18.1	18.0	18.4	18.8	17.6	18.1	18.0	18.4	18.8	
4H	2H	17.8	18.3	18.1	18.6	18.9	17.8	18.3	18.1	18.6	18.9
	3H	17.6	18.1	18.0	18.4	18.8	17.6	18.1	18.0	18.4	18.8
	4H	17.5	17.9	17.9	18.3	18.7	17.5	17.9	17.9	18.3	18.7
	6H	17.4	17.8	17.9	18.2	18.6	17.4	17.8	17.9	18.2	18.6
	8H	17.4	17.7	17.8	18.1	18.6	17.4	17.7	17.8	18.1	18.6
12H	17.4	17.7	17.8	18.1	18.5	17.4	17.7	17.8	18.1	18.5	
8H	4H	17.4	17.7	17.8	18.1	18.6	17.4	17.7	17.8	18.1	18.6
	6H	17.3	17.6	17.8	18.0	18.5	17.3	17.6	17.8	18.0	18.5
	8H	17.3	17.5	17.8	18.0	18.5	17.3	17.5	17.8	18.0	18.5
	12H	17.2	17.4	17.7	17.9	18.4	17.2	17.4	17.7	17.9	18.4
12H	4H	17.4	17.7	17.8	18.1	18.5	17.4	17.7	17.8	18.1	18.5
	6H	17.3	17.5	17.7	18.0	18.5	17.3	17.5	17.8	18.0	18.5
	8H	17.2	17.4	17.7	17.9	18.4	17.2	17.4	17.7	17.9	18.4
Variations with the observer position at spacing:											
S =	1.0H	5.2 / -12.6					5.2 / -12.6				
	1.5H	8.0 / -14.5					8.0 / -14.5				
	2.0H	10.0 / -15.7					10.0 / -15.7				