

# Platea Pro

Design Jean-Michel Wilmotte

iGuzzini

Last information update: October 2024

**Product configuration: P790**  
P790: Platea Pro



**Product code**  
P790: Platea Pro

**Technical description**

Outdoor luminaire with a SuperSpot optic, designed to use LED lamps. Made up of an optical assembly with a base and an aluminium alloy frame. The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. With a 5 mm thick colourless transparent tempered sodium-calcium glass cover. The product can be tilted by +5°/-90° around the vertical plane with a 10° step graduated gauge and fitted with mechanical blocks that guarantee stable aiming of the beam of light. Horizontal aiming is performed using the slots in the base, which allow an ±30° adjustment. High visual comfort. Polymer optic lenses offering high yield and even light distribution. Complete with circuit fitted with Neutral White monochrome power LEDs. Extractable control gear connected with quick-coupling connectors. 220-240V ac 50/60Hz DALI electronic ballast. Replaceable control gear. All the screws used are made of A2 stainless steel.

**Installation**

The luminaire can be installed at ground level or on walls using the standard base.

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

**Weight (Kg)**

5.32

**Mounting**

wall arm|wall surface|ground anchored


**Wiring**

Luminaire ready for pass-through wiring. Product perfect watertightness at the power cable entry point is guaranteed by 2 nickel-plated brass M24x1.5 cable clamps, suitable for cables with a max external 14mm ø (1.5mm² cross section). Push in terminal board.

**Notes**

Available accessories include: a refractor for elliptical light flow distribution, diffusing glass, visor, directional flaps, protective grille .

Complies with EN60598-1 and pertinent regulations




**Technical data**

lm system:	2847	Life Time LED 1:	60,000h - L80 - B10 (Ta 25°C)
W system:	35	Life Time LED 2:	60,000h - L80 - B10 (Ta 40°C)
lm source:	3650	Lamp code:	LED
W source:	31	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	81.3	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 50°C.
Light Output Ratio (L.O.R.) [%]:	78	Power factor:	See installation instructions
Beam angle [°]:	4°	Inrush current:	26 A / 180 µs
CRI (minimum):	80	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 17 luminaires B16A: 28 luminaires C10A: 29 luminaires C16A: 47 luminaires
Colour temperature [K]:	4000	Overvoltage protection:	10kV Common mode & 6kV Differential mode
MacAdam Step:	2	Control:	DALI-2

**Polar**

Imax=203038 cd		Lux			
90°	180°	h	d	Em	E <sub>max</sub>
		30	2.1	182	226
		60	4.2	46	56
		90	6.3	20	25
		120	8.4	11	14
α = 4°					

### Isolux

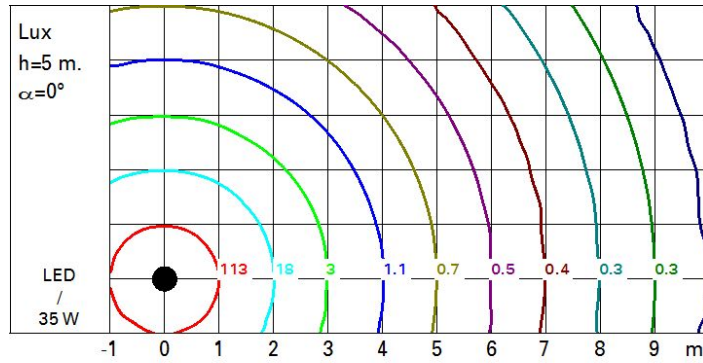

### UGR diagram

Corrected UGR values (at 3050 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	12.0	14.0	12.4	14.3	14.6	12.0	14.0	12.4	14.3	14.6
	3H	12.5	13.6	12.8	13.9	14.2	12.6	13.7	12.9	14.0	14.3
	4H	12.5	13.3	12.9	13.6	13.9	12.7	13.5	13.0	13.8	14.1
	6H	12.5	13.0	12.9	13.3	13.7	12.7	13.2	13.1	13.5	13.8
	8H	12.4	13.1	12.8	13.4	13.8	12.6	13.3	13.0	13.6	13.9
	12H	12.3	13.2	12.7	13.5	13.9	12.5	13.3	12.9	13.7	14.1
4H	2H	12.7	13.5	13.0	13.8	14.1	12.5	13.3	12.9	13.6	13.9
	3H	13.0	13.9	13.4	14.2	14.6	12.9	13.8	13.3	14.1	14.5
	4H	12.8	14.1	13.3	14.5	15.0	12.8	14.1	13.3	14.5	15.0
	6H	12.6	14.4	13.0	14.8	15.3	12.6	14.4	13.1	14.9	15.3
	8H	12.4	14.4	12.9	14.8	15.4	12.5	14.4	13.0	14.9	15.4
	12H	12.4	14.3	12.9	14.7	15.3	12.4	14.3	12.9	14.8	15.3
8H	4H	12.5	14.4	13.0	14.9	15.4	12.4	14.4	12.9	14.8	15.4
	6H	12.5	14.0	13.0	14.5	15.0	12.5	14.0	13.0	14.5	15.0
	8H	12.6	13.7	13.1	14.2	14.7	12.6	13.7	13.1	14.2	14.7
	12H	12.7	13.3	13.3	13.8	14.3	12.7	13.3	13.3	13.8	14.3
12H	4H	12.4	14.3	12.9	14.8	15.3	12.4	14.3	12.9	14.7	15.3
	6H	12.6	13.7	13.1	14.2	14.7	12.6	13.7	13.1	14.2	14.7
	8H	12.7	13.3	13.3	13.8	14.3	12.7	13.3	13.3	13.8	14.3
Variations with the observer position at spacing:											
S =	1.0H	1.0 / -1.0					1.0 / -1.0				
	1.5H	2.1 / -2.1					2.1 / -2.1				
	2.0H	2.7 / -3.9					2.7 / -3.9				