iGuzzini

Last information update: October 2024

### Product configuration: MR76

MR76: Ceiling-mounted luminaire - warm LED - Controlled luminance UGR < 19 - DALI dimmable control gear

#### Product code

MR76: Ceiling-mounted luminaire - warm LED - Controlled luminance UGR < 19 - DALI dimmable control gear Attention! Code no longer in production

## Technical description

LED lamp, ceiling-mounted luminaire; integrated DALI dimmable control gear. Die-cast aluminium plate for surface mounting with diffuser element; technical, shaped aluminium sheet brackets for components and optics; comfort reflector vacuum-metallised with a luminium vapours and finished with a protective anti-scratch layer - controlled luminance optic; safety glass cover over LED lamp; lathe-shaped aluminium cylindrical body; lower ring in high resistance polycarbonate.

## Installation

Mounting

Wiring

Notes

Plate fixed to ceiling using screws and screw anchors (not included); bayonet assembly systems ensuring simple installation and maintenance; snap-on spring fastening for reflector. Wall or pendant application option available thanks to special accessory kits with a separate code.


Control gear integrated in luminaire; mains and optic unit connections made with quick coupling terminal blocks. Touch-dim push-

Colour White (01) | Grey (15)

wall surface|ceiling surface|ceiling pendant

button dimming option (see instruction sheet)

Weight (Kg) 3.1



and the

Design iGuzzini


## 240

# Complies with EN60598-1 and pertinent regulations

Kit for wall-mounting: code no. 9443 - kit for steel cable pendant system L 1500: code no. 9441

Technical data			
Im system:	1679	Colour temperature [K]:	3000
W system:	15.3	MacAdam Step:	2
Im source:	2000	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	12	Lamp code:	LED
Luminous efficiency (Im/W, real value):	109.8	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	84	Control:	DALI
CRI:	80		

#### Polar

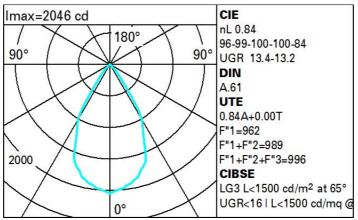

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	67	65	69	67	66	63	76
1.0	78	74	71	69	73	71	70	67	80
1.5	82	79	77	75	78	76	75	73	87
2.0	85	83	81	80	82	80	79	77	91
2.5	87	85	84	82	84	82	82	79	94
3.0	88	86	85	85	85	84	83	81	96
4.0	89	88	87	86	86	86	85	82	98
5.0	89	89	88	88	87	87	85	83	99

# Luminance curve limit

DC	Α	G	1.15	2000	1000	500		<-300		
	в		1.50		2000	1000	750	500	<=300	
	С		1.85			2000		1000	500	<=300
				-		-	- / - /		-	
85° [						2				- 8
75° -										4
10										
65° -							$\land \vdash$			2
55° -			_	+ + *						- a
								$\mathbb{N}$		
45°	2		2	3 4 5	6 8 10	0	2 3	4 5 6	8 10 <sup>4</sup>	cd/m <sup>2</sup>

# UGR diagram

Rifle	ct ·												
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30		
walls work pl.		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30		
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20		
Room dim		222023		viewed			0.0000000		viewed				
x	У		c	rosswis	е				endwise				
2H	2H	13.4	14.1	13.7	14.3	14.6	13.4	14.1	13.7	14.3	14.6		
	ЗН	13.4	14.0	13.7	14.2	14.5	13.3	13.9	13.6	14.2	14.5		
	4H	13.4	13.9	13.7	14.2	14.5	13.3	13.8	13.6	14.1	14.4		
	бH	13.4	13.9	13.8	14.2	14.6	13.2	13.7	13.5	14.0	14.3		
	BH	13.5	13.9	13.8	14.3	14.6	13.1	13.6	13.5	14.0	14.3		
	12H	13.5	13.9	13.8	14.3	14.6	13. <mark>1</mark>	13.6	13.5	13.9	14.3		
4H	2H	13.3	13.8	13.6	14.1	14.4	13.4	13.9	13.7	14.2	14.5		
	ЗH	13.2	13.7	13.6	14.0	14.4	13.3	13.7	13.6	14.1	14.4		
	4H	13.2	13.6	13.6	14.0	14.4	13.2	13.6	13.6	14.0	14.4		
	6H	13.4	13.7	13.8	14.1	14.6	13.2	13.6	13.6	14.0	14.4		
	BH	13.4	13.8	13.9	14.2	14.6	13.2	13.5	13.6	13.9	14.4		
	12H	13.5	13.8	14.0	14.2	14.7	13.2	13.5	13.6	13.9	14.3		
вн	4H	13.2	13.5	13.6	13.9	14.4	13.4	13.8	13.9	14.2	14.6		
	6H	13.4	13.7	13.9	14.1	14.6	13.5	13.8	14.0	14.2	14.7		
	BH	13.5	13.8	14.0	14.2	14.7	13.5	13.8	14.0	14.2	14.7		
	12H	13.7	13.9	14.2	14.3	14.9	13.6	13.8	14.1	14.3	14.8		
12H	4H	13.2	13.5	13.6	13.9	14.3	13.5	13.8	14.0	14.2	14.7		
	бH	13.4	13.7	13.9	14.1	14.6	13.6	13.8	14.1	14.3	14.8		
	H8	13.6	13.8	14.1	14.3	14.8	13.7	13.9	14.2	14.3	14.9		
Varia	ations wi	th the ot	oserver p	osition	at spacin	g:							
S =	1.0H		4	.8 / -4	.4	4.8 / -4.4							
	1.5H	7.5 / -4.6						7.5 / -4.6					
	2.0H		9.4 / -4.5						9.4 / -4.5				