

Last information update: May 2025

Product configuration: 2752

2752: Spotlight with bracket - RGBW - Integrated control card - Remote power supply - Wall Washer optic

**Product code**

2752: Spotlight with bracket - RGBW - Integrated control card - Remote power supply - Wall Washer optic

Technical description

Spotlight designed to use RGBW (Red Green Blue White 3000K) LED lamps, a Wall Washer optic and a DMX512-RDM control. Consists of a die-cast aluminium optical assembly, bracket and box for the power supply with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The optical system is Opti Beam Lens. The power supply is remote whereas the DMX control card is integrated in the product. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Installation

Floor, ceiling or wall-mounted installation.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

9.35

Wiring


Double PG.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	3733	Colour temperature [K]:	RGBW - 3000K
W system:	75.8	Life Time LED 1:	92,000h - L80 - B10 (Ta 25°C)
Im source:	6550	Lamp code:	LED
W source:	68	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	49.3	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 35°C.
Light Output Ratio (L.O.R.) [%]:	57	LED current [mA]:	330
CRI (typical):	82	Control:	DMX-RDM

Polar

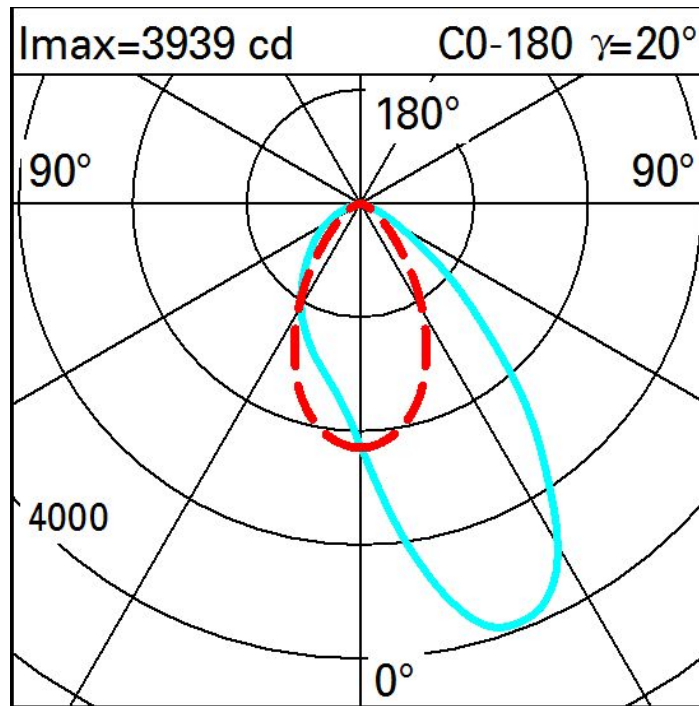

Illuminances

Lux												Wall distance = 1m											
3																							
	0.2	0.8	3	17	70	141	70	17	3	0.8	0.2												
2	2	6	19	73	275	546	275	73	19	6	2												
	5	12	37	124	339	518	339	124	37	12	5												
1	7	18	48	133	269	355	269	133	48	18	7												
	9	23	53	108	174	212	174	108	53	23	9												
0																							
	m	-2	-1	0	1	2	3																