

Last information update: April 2025

Product configuration: 4080.04+X660.H3

4080.04: Pole-mounted system - SMC optic - Neutral White - Zhaga Down - Black

X660.H3: Adapter required for pole-mounted installation for Zhaga version - to be ordered together with the optical assembly - Ø60mm - Glossy black



Product code


4080.04: Pole-mounted system - SMC optic - Neutral White - Zhaga Down - Black

Technical description

Outdoor luminaire with direct light street optic. The optical assembly is made of EN1706AC 46100LF aluminium alloy, subjected to a multi-step, pre-treatment process in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a textured acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. The 5 mm thick, sodium-calcium closing glass for both optical assemblies is fitted to the product via 3 captive screws on each side. The high IP rating is guaranteed by the silicone gasket placed between the two elements. Product fitted with a multi-pole Zhaga 4 PIN Down socket. Complete with Neutral White monochrome LED circuit. The wiring and optical assembly can be opened with everyday tools. The light flow emitted in the upper hemisphere of the system in the horizontal position is null (when used with a black finish pole-mounting). Product pre-wired with a 1.1m long outlet cable. The IP68 connector can be purchased separately as an accessory. All external screws are made of stainless steel.

Installation

The optical assembly can be installed using two pole-tops that can be ordered separately as an accessory: one for Ø 60mm and one for Ø76mm. It can be installed on Ø102mm pole-tops using a reducer that can be purchased as an accessory.



Colour
Black (04)

Weight (Kg)
6.89

Mounting
pole-top

Wiring

Connection to be made with an IP68 connector, which can be purchased separately.

Complies with EN60598-1 and pertinent regulations



Accessory code

X660.H3: Adapter required for pole-mounted installation for Zhaga version - to be ordered together with the optical assembly - Ø60mm - Glossy black




Technical description

Adapter required for pole-mounted installation for Zhaga version - to be ordered together with the optical assembly - Ø60mm

Colour
Glossy Black (H3)

Weight (Kg)
1.41

Complies with EN60598-1 and pertinent regulations




Technical data

Im system:	5000
W system:	32
Im source:	5000
W source:	32
Luminous efficiency (Im/W, real value):	156.3
Im in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	0
Light Output Ratio (L.O.R.) [%]:	100
CRI (minimum):	70
Colour temperature [K]:	4000
MacAdam Step:	3


Lamp code:	LED
Number of lamps for optical assembly:	1
ZVEI Code:	LED
Number of optical assemblies:	1
Intervallo temperatura ambiente:	from -20°C to +35°C. (*)
Power factor:	See installation instructions
Inrush current:	21 A / 300 µs
Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 13 luminaires B16A: 21 luminaires C10A: 21 luminaires C16A: 35 luminaires
Minimum dimming %:	10
Overvoltage protection:	10kV Common mode & 6kV Differential mode

* Preliminary data

Polar

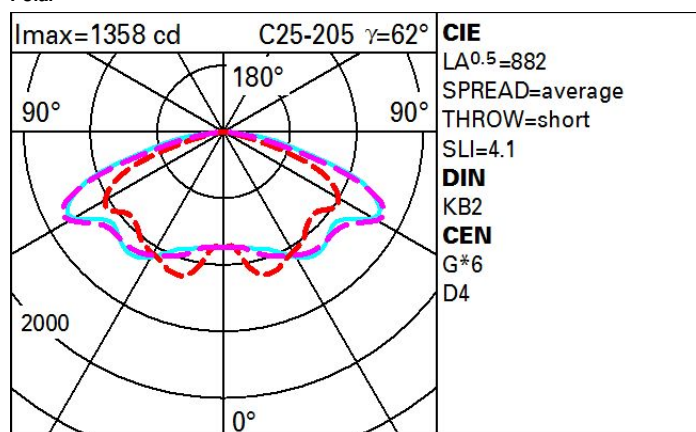

Isolux

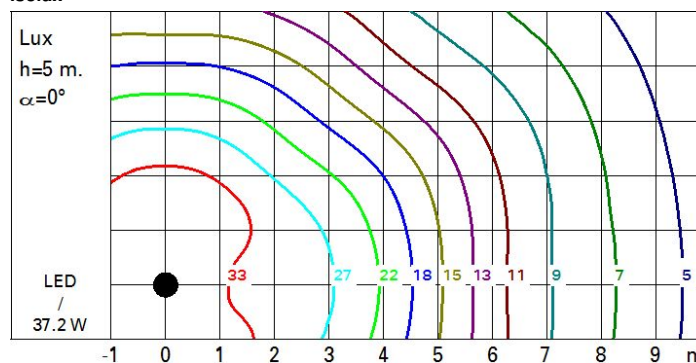

Utilisation factors

