


Last information update: October 2024

Product configuration: BK67

BK67: Wall-/Ceiling-mounted - 18Wram White LEDs - 24V dc - L=1585mm - 20° Medium optic

**Product code**

BK67: Wall-/Ceiling-mounted - 18Wram White LEDs - 24V dc - L=1585mm - 20° Medium optic

Technical description

Direct light luminaire, designed to use monochrome LED lamps. Ceiling- and wall-mounted. Consists of a body and supports for installation (to be ordered separately). Extruded aluminium body, with zamak die-cast end caps complete with silicone seals. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED power plate in Wram White 3000K with 24V dc electronic circuit (ballast to be ordered separately); 24V smart driver allowing constant light flow emission despite variations in the input voltage (from 30V dc to 16V dc). Fitted with a PMMA diffusing filter and optic with plastic (methacrylate) lens for 20° MEDIUM lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

Installation

The following accessories are available for installation: adjustable wall-mounted arms in AISI304 stainless steel (L=83mm code BZJ9, 200mm code BZJ8) and a plate for surface- or ceiling-mounting made of anodised aluminium (BZJ7).

Colour

Grey (15)

Mounting

wall surface|ceiling surface

Wiring

The product is supplied with a single nickel-plated brass cable gland PG9 and a 2x1mm² PVC and polyurethane outlet cable, 2000mm long. For the electrical connection there is an IP68 linear connector (BZK6) and an IP66 junction box with quick-coupling terminals (BZK7). 24V dc electronic ballasts to be ordered separately: 120W (BZK0), 240W (9912) and 480W (BZK1)

Notes

Product complete with LED lamp.

Complies with EN60598-1 and pertinent regulations




IK05

IP66

**Technical data**

Im system:	1135	MacAdam Step:	3
W system:	20.8	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	1700	Life Time LED 2:	66,000h - L80 - B10 (Ta 40°C)
W source:	20	Voltage [Vin]:	24
Luminous efficiency (Im/W, real value):	54.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	67	Number of optical assemblies:	1
Beam angle [°]:	14°	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	LED current [mA]:	350
Colour temperature [K]:	3000	Control:	PWM

Polar

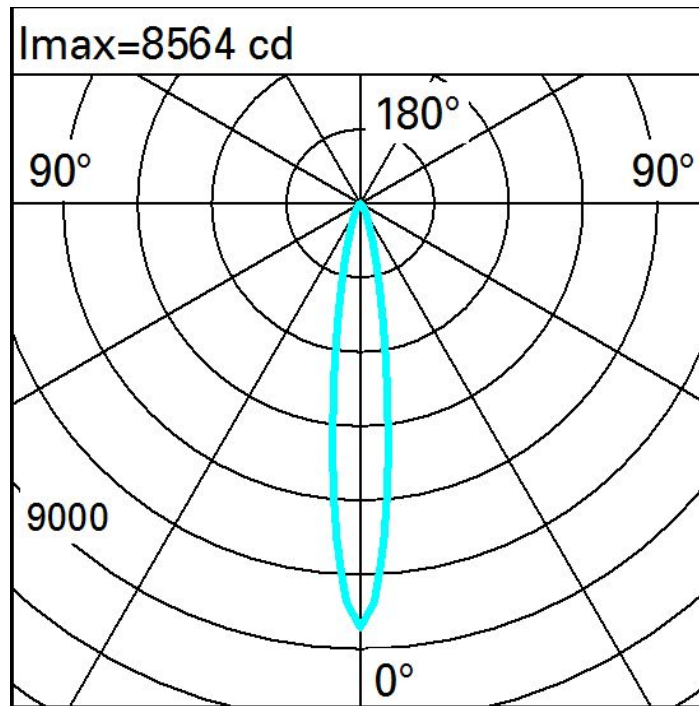

Illuminances

Lux													Wall distance = 1m	
3														
		0.1	0.3	1	3	5	3	1	0.3	0.1				
2	0.2	0.4	1	3	8	14	8	3	1	0.4	0.2			
		0.3	0.8	2	6	16	24	16	6	2	0.8	0.3		
1	0.5	1	3	9	19	27	19	9	3	1	0.5			
		0.7	2	4	9	17	25	17	9	4	2	0.7		
0														
	m	-2	-1	0	1	2	3							