


Last information update: March 2025

Product configuration: E003

E003: Joburg - Pole-mounted system for urban and residential parks and gardens



Product code

E003: Joburg - Pole-mounted system for urban and residential parks and gardens

Technical description

Outdoor luminaire with an elliptical optic, designed to use LED lamps. The optical assembly and the pole attachment system are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. Diffusor made of shockproof, UV-stabilised injection moulded polycarbonate. Complete with circuit fitted with Warm White monochrome LEDs. Optical assembly consisting of an anodized super-pure aluminium upper reflector, a methacrylate lens and a lower reflector made of metallised PC. Replaceable LEDs and driver. Dali selv driver with automatic internal temperature control system. Overvoltage protection up to 9KV. All external screws are made of stainless steel.

Installation

The luminaire can be installed with a pole-top mounting on poles with ø 60mm and 76mm end part using X102 and X126 accessories. Secured to the pole by two bolts.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

3

Mounting

pole-top

Wiring

The product is supplied wired and with an outlet cable (2x1mm) 500mm long.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2150	MacAdam Step:	2
W system:	20.1	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Im source:	-	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W source:	-	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	107	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	95	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	100	Number of optical assemblies:	1
Beam angle [°]:	98° / 114°	Intervallo temperatura ambiente:	from -40°C to 50°C.
CRI (minimum):	80	Lifetime of product at ambient operating temperature:	≥ 80.000h Ta=40°C
Colour temperature [K]:	3000	Control:	DALI-2

Polar

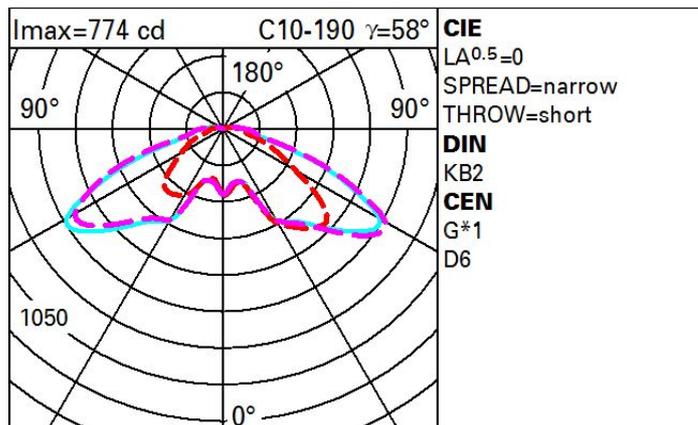

Isolux

