


Polaire

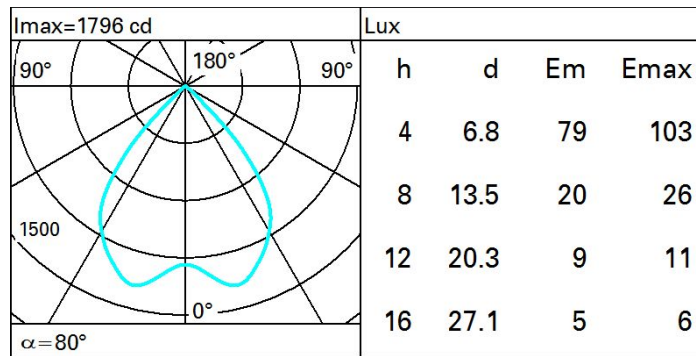

Isolux

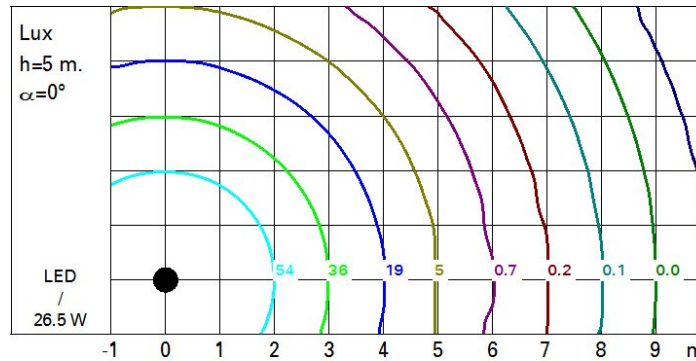


Diagramme UGR

Corrected UGR values (at 2990 lm bare lamp luminous flux)										
Reflect.:		viewed crosswise					viewed endwise			
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise			
x	y									
2H	2H	24.4	25.0	24.7	25.3	25.5	24.4	25.0	24.7	25.3
	3H	24.3	24.8	24.6	25.1	25.4	24.3	24.8	24.6	25.1
	4H	24.2	24.7	24.5	25.0	25.3	24.2	24.7	24.5	25.0
	6H	24.1	24.6	24.5	24.9	25.2	24.1	24.6	24.5	24.9
	8H	24.1	24.6	24.5	24.9	25.2	24.1	24.6	24.5	24.9
	12H	24.1	24.5	24.4	24.8	25.2	24.1	24.5	24.4	24.8
4H	2H	24.2	24.7	24.5	25.0	25.3	24.2	24.7	24.5	25.0
	3H	24.1	24.5	24.4	24.8	25.2	24.1	24.5	24.4	24.8
	4H	24.0	24.3	24.4	24.7	25.1	24.0	24.3	24.4	24.7
	6H	23.9	24.2	24.3	24.6	25.0	23.9	24.2	24.3	24.6
	8H	23.8	24.1	24.3	24.6	25.0	23.8	24.1	24.3	24.6
	12H	23.8	24.1	24.2	24.5	24.9	23.8	24.1	24.2	24.5
8H	4H	23.8	24.1	24.3	24.6	25.0	23.8	24.1	24.3	24.6
	6H	23.7	24.0	24.2	24.4	24.9	23.7	24.0	24.2	24.4
	8H	23.7	23.9	24.2	24.4	24.9	23.7	23.9	24.2	24.4
	12H	23.6	23.8	24.1	24.3	24.8	23.6	23.8	24.1	24.3
12H	4H	23.8	24.1	24.2	24.5	24.9	23.8	24.1	24.2	24.5
	6H	23.7	23.9	24.2	24.4	24.9	23.7	23.9	24.2	24.4
	8H	23.6	23.8	24.1	24.3	24.8	23.6	23.8	24.1	24.3
Variations with the observer position at spacing:										
S =	1.0H	3.5 / -18.1					3.5 / -18.1			
	1.5H	5.5 / -28.2					5.5 / -28.2			
	2.0H	7.5 / -29.2					7.5 / -29.2			