
Laser Blade


Design iGuzzini iGuzzini

Design iGuzzini iGuzzini

Last information update: March 2025

Product configuration: EJ52.43

EJ52.43: 10 - cell Recessed luminaire - LED - Warm white - Incorporated DALI dimmable power supply - Spot optic - Black/Black



Product code

EJ52.43: 10 - cell Recessed luminaire - LED - Warm white - Incorporated DALI dimmable power supply - Spot optic - Black/Black

Technical description


Technical description
rectangular miniaturised recessed luminaire with 10 optical elements with LED lamps - fixed optics - spot beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare . Supplied with DALI dimmable electronic control gear connected to the luminaire. Warm white high colour rendering LED

Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 274

Colour	Weight (Kg)
Black / Black (43)	0.65

Weight (Kg)	0.65
-------------	------



Mounting

mounting
wall recessed/ceiling recessed

Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations




IP20



Technical data

Im system:	1722	CRI (typical):	92
W system:	23.2	Colour temperature [K]:	2700
Im source:	2100	MacAdam Step:	3
W source:	20	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	74.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	82	Number of optical assemblies:	1
Beam angle [°]:	14°	Control:	DALI-2
CRI (minimum):	90		

Polar

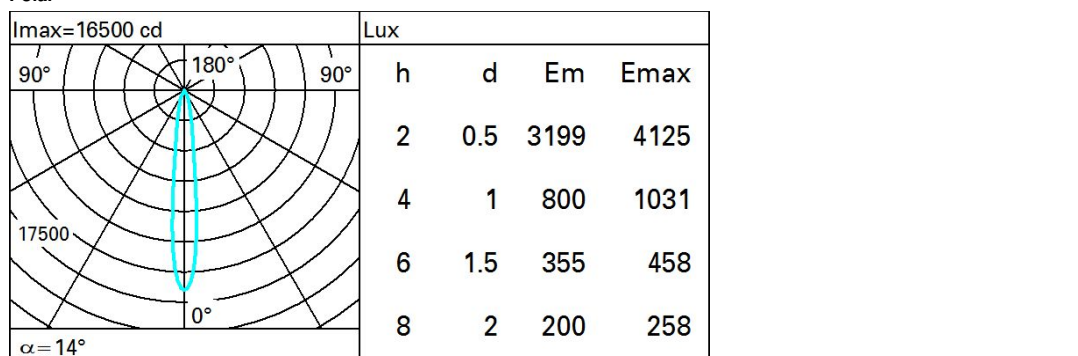

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	68	66	70	67	67	64	78
1.0	77	74	72	70	73	71	71	68	83
1.5	81	79	77	75	78	76	75	73	89
2.0	84	82	80	79	81	79	78	76	93
2.5	85	84	83	82	83	82	81	79	96
3.0	86	85	84	84	84	83	82	80	98
4.0	87	86	86	85	85	85	83	82	99
5.0	88	87	87	87	86	85	84	82	100
