


Last information update: May 2025

**Product configuration: ER15+X487.04**

ER15: Floor recessed Earth D=191mm - Neutral white - Flush-mount stainless steel frame -Wall Washer Super Comfort optic - DALI  
 X487.04: Outer casing in plastic for the ground, floor with stainless steel ring + closure cap - Black

**Product code**

ER15: Floor recessed Earth D=191mm - Neutral white - Flush-mount stainless steel frame -Wall Washer Super Comfort optic - DALI

**Technical description**

Floor or ground-recessed luminaire designed to use white monochrome LED lamps, a fixed optic and a built-in dimmable DALI electronic ballast. The round frame measures D = 191 mm, the body and frame are made of AISI 304 stainless steel and the extra-clear, sodium - calcium tempered glass cover is 15mm thick. The stainless steel body is painted black. The luminaire is fixed to the outer casing using two Torx type screws that hold it in place. The unit comes complete with LED circuit. The product's wiring system features an A2 stainless steel cable gland with a 1191 mm long A07RNF type 4x1 mm<sup>2</sup> output power cable. The cable is equipped with an anti-transpiration device (IP68) that consists of a silicone-coated joint located on the power cable and positioned in the control gear box. An outer casing is available for installation and can be ordered separately from the plastic optic assembly. The glass unit, optical assembly, frame and outer casing together guarantee a maximum static load resistance of 5000 kg. The maximum surface temperature of the glass is less than 40°C.

**Installation**

The product is fixed to the outer casing using two Torx type securing screws. The unit can be floor-recessed using the outer casing for installation.

**Colour**  
Steel (13)

**Weight (Kg)**  
3.2

**Mounting**

Floor recessed|ground recessed


**Wiring**

Product complete with 220÷240V ac DALI dimmable electronic control gear.

**Notes**

IP68 rating on both the product and the cable using IP68 connectors \* The product is not suitable for installation in swimming pools and fountains. Overvoltage protection: 4kV Common Mode, 3.5kV Differential Mode

Complies with EN60598-1 and pertinent regulations

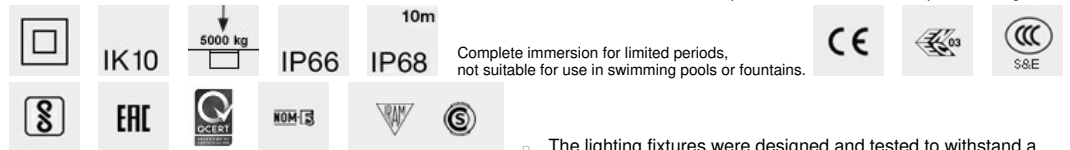

Complete immersion for limited periods, not suitable for use in swimming pools or fountains.

□ The lighting fixtures were designed and tested to withstand a static load of up to 50000 N and to resist drive-over stress by vehicles with tires. The fixtures cannot be used in lanes subjected to horizontal stresses due to acceleration, braking and / or changes of direction.

**Accessory code**

X487.04: Outer casing in plastic for the ground, floor with stainless steel ring + closure cap - Black

**Technical description**

Made of plastic (polypropylene). Inclusive of front cap with system for extracting the cables and double cable entry.

**Installation**

Floor-standing (concrete)

**Colour**  
Steel (13)

**Weight (Kg)**  
1.4

**Mounting**

ground surface|Floor recessed|ground recessed

Complies with EN60598-1 and pertinent regulations



lm system:	323	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W system:	16.5	Lamp code:	LED
lm source:	1900	Number of lamps for optical assembly:	1
W source:	15	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	19.6	Number of optical assemblies:	1
lm in emergency mode:	-	Intervallo temperatura ambiente:	from -25°C to 50°C.
Total light flux at or above an angle of 90° [Lm]:	323	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	17	Inrush current:	5 A / 50 µs
CRI (minimum):	80	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
Colour temperature [K]:	4000	Minimum dimming %:	1
MacAdam Step:	2	Overvoltage protection:	4kV Common mode & 3kV Differential mode
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)	Control:	DALI-2

Imax=423 cd      C0-180  $\gamma=150^\circ$

180°

225  
90°

0°

90°

**CIE**  
LA<sup>0.5</sup>=113  
SPREAD=narrow  
THROW=short  
SLI=13.5  
**DIN**  
KB1  
**CEN**  
G\*2  
D6