

Product configuration: ET38

ET38: Spotlight with bracket - Tunable White - Integrated control card - Remote power supply - Super Spot optic - Ta 25°




ET38: Spotlight with bracket - Tunable White - Integrated control card - Remote power supply - Super Spot optic - Ta 25°

Spotlight designed to use (White 2200K, 3000K, 4000K) LED lamps, a Super Spot optic and a DMX512-RDM control. Consists of a die-cast aluminium optical assembly, bracket and box for the power supply with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agora is fitted with a graduated scale and mechanical locking device for positioning. The optical system is Opti Beam Lens. The power supply is remote whereas the DMX control card is integrated in the product. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Floor, ceiling or wall-mounted installation.

Colour	Weight (Kg)
White (01) Black (04) Grey (15) Rust Brown (F5)	9.35




Double PG.

Complies with EN60598-1 and pertinent regulations




lm system:	4480	Colour temperature [K]:	Tunable white 2200 - 4000
W system:	70.2	MacAdam Step:	3
lm source:	6400	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W source:	65	Voltage [Vin]:	48
Luminous efficiency (lm/W, real value):	63.8	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	70	Number of optical assemblies:	1
Beam angle [°]:	5°	Intervallo temperatura ambiente:	from -30°C to 35°C.
CRI (minimum):	80	Control:	DMX-RDM

Polar

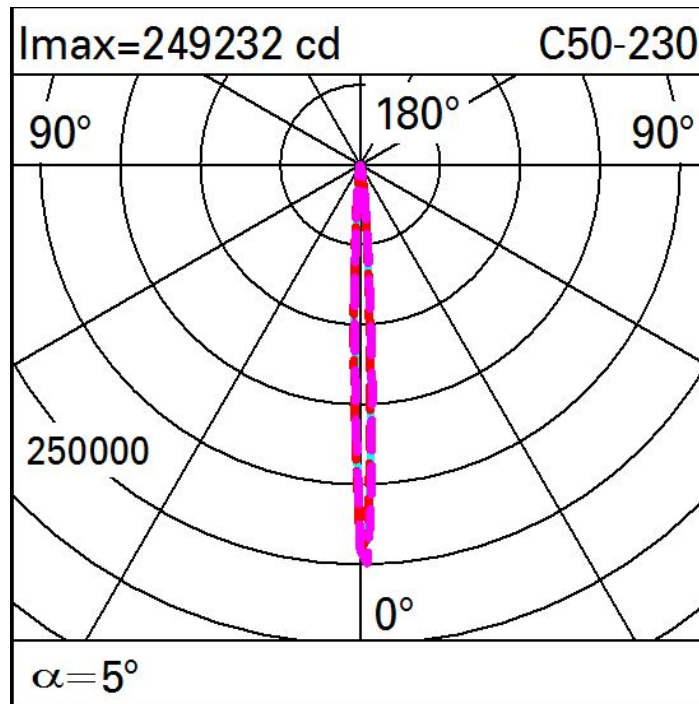

Isolux

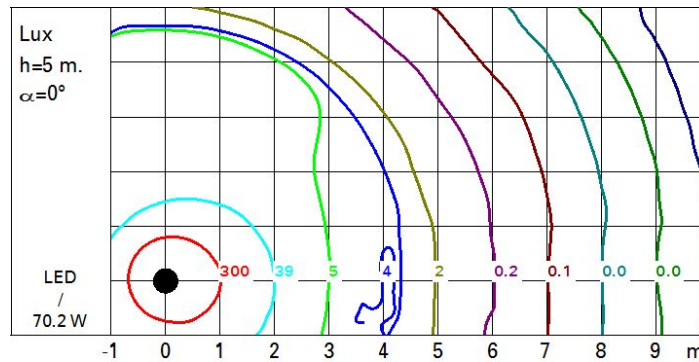

Illuminances

