
Laser Blade


Design iGuzzini iGuzzini

Design iGuzzini iGuzzini

Last information update: March 2025

Product configuration: MK53.01

MK53.01: 10 - cell Recessed luminaire - LED - Warm white flood- DALI - White



Product code

Product code
MK53.01: 10 - cell Recessed luminaire - LED - Warm white flood- DALI - White

Technical description

Technical description
rectangular miniaturised recessed luminaire with 10 optical elements with LED lamps - fixed optics - flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare . Supplied with DALI dimmable electronic control gear connected to the luminaire. Warm white LED.

Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 274

Colour	Weight (Kg)
--------	-------------

Colour	Weight (Kg)
White (01)	0.6

Weight (Kg)

0.6

Mounting

Mounting
wall recessed ceiling recessed

Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations



IP20

IP23


On the visible part of
the product once installed



Technical data

Im system:	1782	CRI (typical):	92
W system:	23.4	Colour temperature [K]:	3000
Im source:	2200	MacAdam Step:	3
W source:	20	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	76.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	32°	Control:	DALI-2
CRI (minimum):	90		

Polar

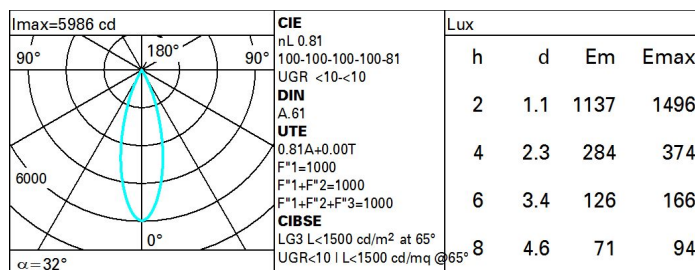

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	70	67	65	69	66	66	64	78
1.0	76	73	71	69	72	70	70	67	83
1.5	80	78	76	74	77	75	74	72	89
2.0	83	81	79	78	80	78	78	75	93
2.5	84	83	82	81	82	81	80	78	96
3.0	85	84	83	83	83	82	81	79	98
4.0	86	85	85	84	84	84	82	81	99
5.0	87	86	86	86	85	84	83	81	100

UGR diagram

Corrected UGR values (at 2200 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-7.8	-7.3	-7.6	-7.1	-6.9	-7.8	-7.3	-7.6	-7.1	-6.9
	3H	-8.0	-7.5	-7.7	-7.2	-7.0	-8.0	-7.5	-7.7	-7.2	-7.0
	4H	-8.0	-7.6	-7.7	-7.3	-7.0	-8.0	-7.6	-7.7	-7.3	-7.0
	6H	-8.1	-7.7	-7.8	-7.4	-7.1	-8.1	-7.7	-7.8	-7.4	-7.1
	8H	-8.1	-7.8	-7.8	-7.4	-7.1	-8.2	-7.8	-7.8	-7.5	-7.1
	12H	-8.2	-7.8	-7.8	-7.5	-7.1	-8.2	-7.8	-7.8	-7.5	-7.1
4H	2H	-8.0	-7.6	-7.7	-7.3	-7.0	-8.0	-7.6	-7.7	-7.3	-7.0
	3H	-8.2	-7.8	-7.8	-7.5	-7.1	-8.2	-7.8	-7.8	-7.5	-7.1
	4H	-8.3	-8.0	-7.9	-7.6	-7.2	-8.3	-8.0	-7.9	-7.6	-7.2
	6H	-8.4	-8.1	-7.9	-7.7	-7.3	-8.4	-8.1	-8.0	-7.7	-7.3
	8H	-8.4	-8.1	-8.0	-7.7	-7.3	-8.4	-8.2	-8.0	-7.7	-7.3
	12H	-8.4	-8.2	-8.0	-7.8	-7.3	-8.5	-8.2	-8.0	-7.8	-7.3
8H	4H	-8.4	-8.2	-8.0	-7.7	-7.3	-8.4	-8.1	-8.0	-7.7	-7.3
	6H	-8.5	-8.3	-8.0	-7.8	-7.4	-8.5	-8.3	-8.0	-7.8	-7.3
	8H	-8.5	-8.3	-8.1	-7.9	-7.4	-8.5	-8.3	-8.1	-7.9	-7.4
	12H	-8.6	-8.4	-8.0	-7.9	-7.4	-8.6	-8.4	-8.1	-7.9	-7.4
12H	4H	-8.5	-8.2	-8.0	-7.8	-7.3	-8.4	-8.2	-8.0	-7.8	-7.3
	6H	-8.6	-8.4	-8.1	-7.9	-7.4	-8.5	-8.3	-8.0	-7.9	-7.4
	8H	-8.6	-8.4	-8.1	-7.9	-7.4	-8.6	-8.4	-8.0	-7.9	-7.4
Variations with the observer position at spacing:											
S =		1.0H	6.7 / -11.6				6.7 / -11.6				
		1.5H	9.6 / -12.2				9.6 / -12.2				
		2.0H	11.5 / -12.6				11.5 / -12.6				