




# Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	65	61	59	57	61	58	58	56	77
1.0	68	65	62	61	64	62	62	59	81
1.5	72	69	67	66	68	67	66	64	88
2.0	74	72	71	70	71	70	69	67	92
2.5	75	74	73	72	73	72	71	69	95
3.0	76	75	75	74	74	73	73	71	97
4.0	77	76	76	75	75	75	74	72	99
5.0	78	77	77	76	76	76	74	73	100

## Curva limite di luminanza

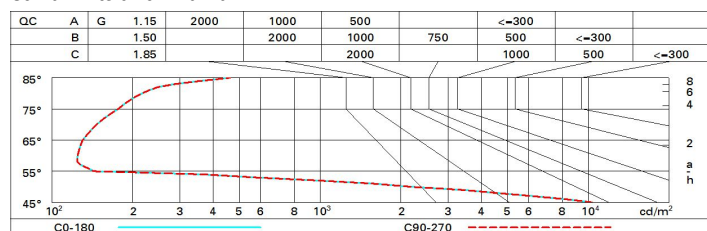

## Diagramma UGR

Corrected UGR values (at 1550 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	17.1	18.8	17.5	19.1	19.4	17.1	18.8	17.5	19.1	19.4
	3H	17.0	18.3	17.4	18.6	18.9	17.0	18.3	17.4	18.6	18.9
	4H	16.9	18.1	17.3	18.4	18.7	16.9	18.1	17.3	18.4	18.7
	6H	16.8	18.0	17.2	18.3	18.7	16.8	18.0	17.2	18.3	18.7
	8H	16.8	17.9	17.2	18.3	18.6	16.8	17.9	17.2	18.3	18.6
	12H	16.7	17.8	17.1	18.2	18.6	16.7	17.8	17.1	18.2	18.6
4H	2H	16.9	18.1	17.3	18.4	18.7	16.9	18.1	17.3	18.4	18.7
	3H	16.7	17.8	17.1	18.2	18.6	16.7	17.8	17.1	18.2	18.6
	4H	16.6	17.6	17.0	18.0	18.5	16.6	17.6	17.0	18.0	18.5
	6H	16.4	17.7	16.9	18.1	18.6	16.4	17.7	16.9	18.1	18.6
	8H	16.3	17.7	16.8	18.2	18.6	16.3	17.7	16.8	18.2	18.6
	12H	16.1	17.7	16.6	18.2	18.7	16.1	17.7	16.6	18.2	18.7
8H	4H	16.3	17.7	16.8	18.2	18.6	16.3	17.7	16.8	18.2	18.6
	6H	16.1	17.6	16.6	18.1	18.6	16.1	17.6	16.6	18.1	18.6
	8H	16.1	17.4	16.6	17.9	18.4	16.1	17.4	16.6	17.9	18.4
	12H	16.2	17.1	16.7	17.6	18.1	16.2	17.1	16.7	17.6	18.1
12H	4H	16.1	17.7	16.6	18.2	18.7	16.1	17.7	16.6	18.2	18.7
	6H	16.1	17.4	16.6	17.9	18.4	16.1	17.4	16.6	17.9	18.4
	8H	16.2	17.1	16.7	17.6	18.1	16.2	17.1	16.7	17.6	18.1
Variations with the observer position at spacing:											
S =	1.0H	4.4 / -22.6					4.4 / -22.6				
	1.5H	7.2 / -22.8					7.2 / -22.8				
	2.0H	9.2 / -23.1					9.2 / -23.1				