


Last information update: May 2025

**Product configuration: N133.Y**

N133.Y: wall-washer luminaire - Ø 153 mm - neutral white - frame

**Product code**

N133.Y: wall-washer luminaire - Ø 153 mm - neutral white - frame

**Technical description**

Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in neutral white colour tone 4000K.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

1.22

**Mounting**

ceiling recessed

**Wiring**

product complete with DALI components

**Notes**


TPb rated

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2172	Colour temperature [K]:	4000
W system:	30	MacAdam Step:	2
lm source:	3950	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	27	Lamp code:	LED
Luminous efficiency (lm/W, real value):	72.4	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	55	Control:	DALI-2
CRI (minimum):	80		

Polar

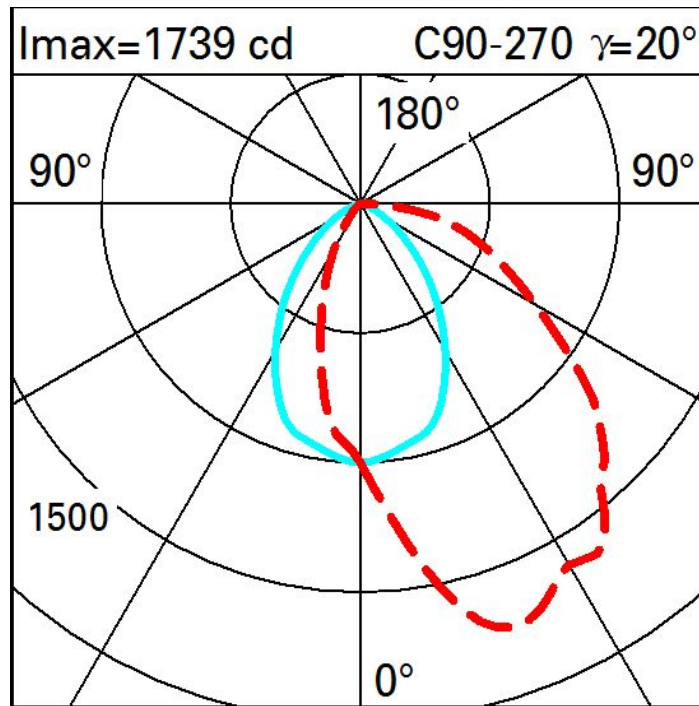

Illuminances

Lux													Wall distance = 1m	
3														
	1.0	4	15	66	254	466	254	66	15	4	1.0			
2	4	12	37	116	319	484	319	116	37	12	4			
	8	19	48	115	210	297	210	115	48	19	8			
1	10	21	44	80	124	158	124	80	44	21	10			
	11	21	35	52	76	94	76	52	35	21	11			
0														
	m	-2	-1	0	1	2	3							