
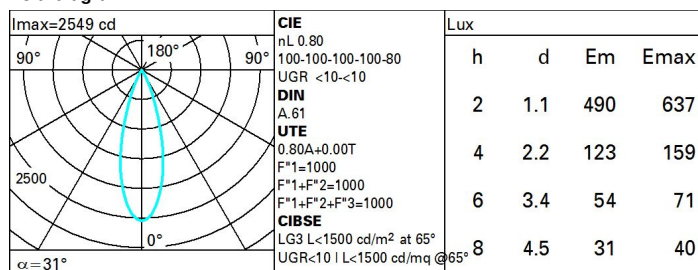


QL03.01: Minimal 5 Zelle - Flood - LED - weiss



Wirkungsgrad

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	69	66	64	68	66	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	77	75	73	76	74	73	71	89
2.0	81	80	78	77	79	77	76	74	93
2.5	83	82	81	80	80	79	79	77	96
3.0	84	83	82	81	82	81	80	78	98
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	85	84	84	83	82	80	100

UGR-Diagramm

Corrected UGR values (at 930 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-3.1	-2.6	-2.8	-2.4	-2.1	-3.1	-2.6	-2.8	-2.4	-2.1
	3H	-3.2	-2.8	-2.9	-2.5	-2.2	-3.2	-2.8	-2.9	-2.5	-2.2
	4H	-3.3	-2.9	-3.0	-2.6	-2.3	-3.3	-2.9	-3.0	-2.6	-2.3
	6H	-3.4	-3.0	-3.0	-2.7	-2.4	-3.4	-3.0	-3.0	-2.7	-2.4
	8H	-3.4	-3.0	-3.1	-2.7	-2.4	-3.4	-3.0	-3.1	-2.7	-2.4
	12H	-3.5	-3.1	-3.1	-2.8	-2.4	-3.5	-3.1	-3.1	-2.8	-2.4
4H	2H	-3.3	-2.9	-3.0	-2.6	-2.3	-3.3	-2.9	-3.0	-2.6	-2.3
	3H	-3.5	-3.1	-3.1	-2.8	-2.4	-3.5	-3.1	-3.1	-2.8	-2.4
	4H	-3.5	-3.2	-3.2	-2.9	-2.5	-3.5	-3.2	-3.2	-2.9	-2.5
	6H	-3.6	-3.4	-3.2	-3.0	-2.5	-3.6	-3.4	-3.2	-3.0	-2.5
	8H	-3.7	-3.4	-3.2	-3.0	-2.6	-3.7	-3.4	-3.2	-3.0	-2.6
	12H	-3.7	-3.5	-3.3	-3.1	-2.6	-3.7	-3.5	-3.3	-3.1	-2.6
8H	4H	-3.7	-3.4	-3.2	-3.0	-2.6	-3.7	-3.4	-3.2	-3.0	-2.6
	6H	-3.8	-3.6	-3.3	-3.1	-2.6	-3.8	-3.6	-3.3	-3.1	-2.6
	8H	-3.8	-3.6	-3.4	-3.2	-2.7	-3.8	-3.6	-3.4	-3.2	-2.7
	12H	-3.9	-3.7	-3.4	-3.2	-2.7	-3.9	-3.7	-3.4	-3.2	-2.7
12H	4H	-3.7	-3.5	-3.3	-3.1	-2.6	-3.7	-3.5	-3.3	-3.1	-2.6
	6H	-3.8	-3.6	-3.4	-3.2	-2.7	-3.8	-3.6	-3.4	-3.2	-2.7
	8H	-3.9	-3.7	-3.4	-3.2	-2.7	-3.9	-3.7	-3.4	-3.2	-2.7
Variations with the observer position at spacing:											
S =		1.0H	0.8 / -18.5				0.8 / -18.5				
		1.5H	9.6 / -18.7				9.6 / -18.7				
		2.0H	11.6 / -23.0				11.6 / -23.0				