

Laser Blade


Design iGuzzini

iGuzzini

Last information update: February 2025

Product configuration: QX78.24

QX78.24: Minimal 10 cells - Wide Flood - LED - Clear transparent

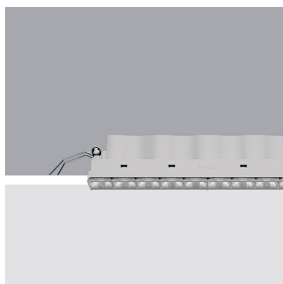

Product code

QX78.24: Minimal 10 cells - Wide Flood - LED - Clear transparent

Technical description

Linear miniaturised recessed luminaire with 10 optical elements for LED lamps - fixed optic. Die-cast aluminium body, minimal version (frameless) installed flush with ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Metallised thermoplastic high definition OptiBeam reflector, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with a dimmable DALI power supply unit connected to the luminaire.

Installation

The recess body is inserted in the specific adapter installed previously by means of a steel wire spring - check the thickness of the false ceiling and use a compatible frame available with a separate item code.

Colour

Clear transparent (24)

Weight (Kg)

0.55

Mounting

wall recessed|ceiling recessed

Wiring

Quick-coupling connections on the ballast unit.


Complies with EN60598-1 and pertinent regulations



IP20

IP23


On the visible part of the product once installed



Technical data

Im system:	1764	CRI (typical):	92
W system:	22.9	Colour temperature [K]:	2700
Im source:	2100	MacAdam Step:	3
W source:	20	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	77	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	84	Number of optical assemblies:	1
Beam angle [°]:	48° / 46°	Control:	DALI-2
CRI (minimum):	90		


Polar

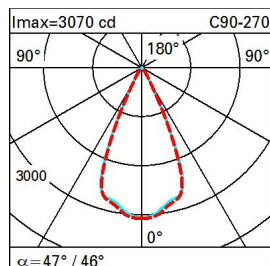		C90-270 CIE nL 0.84 96-99-100-100-84 UGR 13.2-13.3 DIN A.61 UTE 0.84A+0.00T F*1=963 F*1+F*2=987 F*1+F*2+F*3=997				
Lux		h	d1	d2	Em	Emax
		2	1.8	1.7	627	767
		4	3.5	3.4	157	192
		6	5.3	5.1	70	85
		8	7	6.8	39	48

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	70	67	65	70	67	66	64	76
1.0	78	74	71	69	73	71	70	68	80
1.5	82	79	77	75	78	76	75	73	87
2.0	85	83	81	80	82	80	79	77	91
2.5	87	85	84	82	84	82	82	79	94
3.0	88	87	85	85	85	84	83	81	96
4.0	89	88	87	87	86	86	85	83	98
5.0	89	89	88	88	87	87	85	83	99

Luminance curve limit

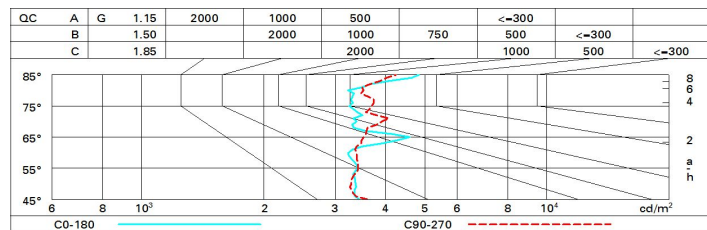

UGR diagram

Corrected UGR values (at 2100 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	10.9	11.5	11.2	11.7	11.9	11.6	12.1	11.8	12.3	12.5
	3H	11.7	12.1	12.0	12.4	12.7	11.7	12.1	12.0	12.4	12.7
	4H	12.0	12.4	12.3	12.7	13.0	11.7	12.1	12.0	12.4	12.7
	6H	12.2	12.6	12.6	13.0	13.3	11.7	12.1	12.0	12.4	12.7
	8H	12.4	12.8	12.7	13.1	13.4	11.7	12.1	12.0	12.4	12.7
	12H	12.5	12.9	12.9	13.3	13.6	11.6	12.0	12.0	12.4	12.7
4H	2H	11.1	11.6	11.5	11.9	12.2	12.5	13.0	12.8	13.2	13.5
	3H	12.1	12.5	12.5	12.8	13.2	12.9	13.3	13.3	13.7	14.0
	4H	12.6	12.9	13.0	13.3	13.7	13.1	13.5	13.5	13.8	14.2
	6H	13.0	13.3	13.4	13.7	14.1	13.2	13.5	13.7	13.9	14.4
	8H	13.2	13.5	13.6	13.9	14.3	13.3	13.5	13.7	13.9	14.4
	12H	13.4	13.7	13.9	14.1	14.6	13.2	13.5	13.7	13.9	14.4
8H	4H	12.8	13.0	13.2	13.4	13.9	13.7	14.0	14.1	14.4	14.8
	6H	13.3	13.6	13.8	14.0	14.5	14.0	14.2	14.4	14.6	15.1
	8H	13.7	13.9	14.1	14.3	14.8	14.0	14.2	14.5	14.7	15.2
	12H	14.1	14.2	14.6	14.7	15.2	14.1	14.3	14.6	14.8	15.3
12H	4H	12.8	13.0	13.2	13.4	13.9	13.8	14.1	14.3	14.5	15.0
	6H	13.4	13.6	13.9	14.0	14.5	14.2	14.4	14.6	14.8	15.3
	8H	13.8	13.9	14.3	14.4	14.9	14.3	14.5	14.8	15.0	15.5
Variations with the observer position at spacing:											
S =		1.0H					1.4 / -0.8				
		1.5H					3.0 / -1.2				
		2.0H					4.3 / -1.3				
							1.4 / -1.1				
							3.0 / -1.3				
							4.5 / -1.6				