

Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	56	50	46	42	49	45	45	41	55
1.0	60	55	51	48	54	50	50	46	62
1.5	67	62	59	56	61	58	57	54	73
2.0	70	67	64	62	66	63	62	59	80
2.5	72	70	67	65	68	66	65	62	84
3.0	74	72	70	68	70	69	67	65	87
4.0	75	74	72	71	72	71	70	67	91
5.0	76	75	74	73	74	72	71	68	93

Curva límite de luminancia

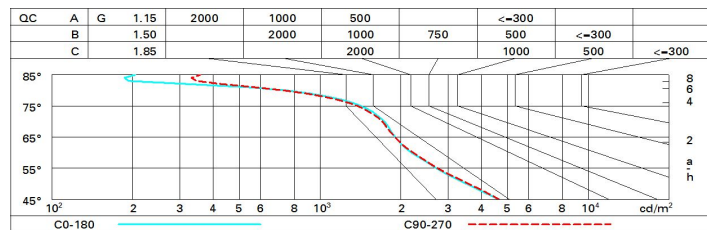


Diagrama UGR

Corrected UGR values (at 6250 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	15.2	16.1	15.5	16.4	16.6	15.3	16.2	15.6	16.4	16.7
	3H	15.9	16.7	16.2	17.0	17.3	15.5	16.3	15.8	16.6	16.9
	4H	16.1	16.9	16.5	17.2	17.5	15.5	16.3	15.9	16.6	16.9
	6H	16.2	16.9	16.6	17.2	17.6	15.5	16.2	15.9	16.5	16.9
	8H	16.2	16.9	16.6	17.2	17.5	15.5	16.2	15.9	16.5	16.9
	12H	16.2	16.8	16.5	17.1	17.5	15.5	16.1	15.9	16.5	16.8
4H	2H	15.5	16.3	15.9	16.6	16.9	16.1	16.9	16.5	17.2	17.5
	3H	16.4	17.0	16.6	17.3	17.7	16.5	17.2	16.9	17.5	17.9
	4H	16.7	17.3	17.1	17.6	18.0	16.7	17.3	17.1	17.6	18.0
	6H	16.8	17.3	17.3	17.7	18.2	16.8	17.3	17.2	17.7	18.1
	8H	16.8	17.3	17.3	17.7	18.1	16.8	17.3	17.3	17.7	18.1
	12H	16.8	17.2	17.2	17.6	18.1	16.8	17.2	17.2	17.6	18.1
8H	4H	16.8	17.3	17.3	17.7	18.1	16.8	17.3	17.3	17.7	18.1
	6H	17.0	17.4	17.5	17.8	18.3	17.0	17.3	17.4	17.8	18.2
	8H	17.0	17.3	17.5	17.8	18.3	17.0	17.3	17.5	17.8	18.3
	12H	17.0	17.2	17.5	17.7	18.2	17.0	17.2	17.5	17.7	18.2
12H	4H	16.8	17.2	17.3	17.6	18.1	16.8	17.2	17.2	17.6	18.1
	6H	17.0	17.3	17.5	17.8	18.3	16.9	17.2	17.4	17.7	18.2
	8H	17.0	17.2	17.5	17.7	18.2	17.0	17.2	17.5	17.7	18.2
Variations with the observer position at spacing:											
S =	1.0H	0.5 / -0.7					0.5 / -0.7				
	1.5H	1.2 / -1.5					1.2 / -1.6				
	2.0H	2.3 / -1.9					2.3 / -2.0				